

FAST NUMERICAL METHOD FOR THE BOLTZMANN EQUATION ON NONUNIFORM GRIDS

Alexei Heintz*, Piotr Kowalczyk**

*Department of Mathematics, Chalmers University of Technology and Göteborg University,
SE-412 96 Göteborg, Sweden

**Department of Mathematics, Informatics and Mechanics, Warsaw University,
Banacha 2, 02-097 Warszawa, Poland

Summary A new numerical method for the solution of the homogeneous Boltzmann equation on nonuniform grids is developed. The collision operator is written using the Fourier transform. This formulation and a special new discretization of the gain part allow for the fast numerical computations on nonuniform grids in velocity space. The results of a numerical test are presented.

We consider the classical Boltzmann equation in a homogeneous case

$$\frac{\partial f}{\partial t} = Q^+(f, f)(\mathbf{v}) - f q^-(f)(\mathbf{v}),$$

where $f := f(t, \mathbf{v})$ and $f : \mathbb{R}_+ \times \mathbb{R}^3 \rightarrow \mathbb{R}_+$. The collision operator, which decomposes into the gain $Q^+(f, f)(\mathbf{v})$ and the loss $f q^-(f)(\mathbf{v})$ parts, is reformulated using the Fourier transform as follows

$$Q^+(f, f)(\mathbf{v}) = F_t^{-1}(\mathbf{v}) F_m^{-1}(\mathbf{v}) \left[\hat{f}_l \hat{f}_m \hat{B}_R(\mathbf{l}, \mathbf{m}) \right], \quad q^-(f)(\mathbf{v}) = F_m^{-1}(\mathbf{v}) \left[\hat{f}_m \hat{B}_R(\mathbf{m}, \mathbf{m}) \right],$$

where \hat{f}_m is the Fourier transform of the function f , the inverse Fourier transform to the velocity variable \mathbf{v} is denoted by $F_m^{-1}(\mathbf{v})$ and $\hat{B}_R(\mathbf{l}, \mathbf{m}) = \int_{\mathcal{B}(0, R)} \int_{S^2} B(|\mathbf{u}|, \theta) e^{2\pi i(\frac{\mathbf{l}+\mathbf{m}}{2}, \mathbf{u})} e^{2\pi i|\mathbf{u}|(\frac{\mathbf{m}-\mathbf{l}}{2}, \omega)} d\omega d\mathbf{u}$ denotes the regularized transform of the collision kernel $B(|\mathbf{u}|, \theta)$. Here we assume an arbitrary model of collision interaction. The distribution function f is usually negligibly small outside some ball. Thus for the numerical treatment of the Boltzmann equation we assume that $\mathbf{v} \in \Omega$, where Ω is the bounded velocity domain.

One of the main problems with efficient computations of the Boltzmann equation is that the deterministic methods use the fixed discretization in the velocity domain. Hence a huge number of discretization points is required to get the desired accuracy. We overcome this problem introducing a nonuniform grid $\Omega_v \subset \Omega$. The discrete points of the grid are chosen in such a way that the jump of the function value between the neighbouring points is lower than some prescribed threshold. In order to treat the discontinuous functions we impose additional condition that the neighbouring points should not be closer than some given number. Thus we have much more discrete points in the grid where the function changes rapidly than in the regions where the function is almost constant. Moreover this nonuniform grid is changed adaptively at each time step to follow the changes of the distribution function f .

Figure 1 shows a sample discontinuous initial condition function used in the numerical tests. Points on the graphs denote the nodes of the nonuniform grid. One can observe the irregular distribution of the grid points – more points are chosen in the regions where the gradient of the function is larger.

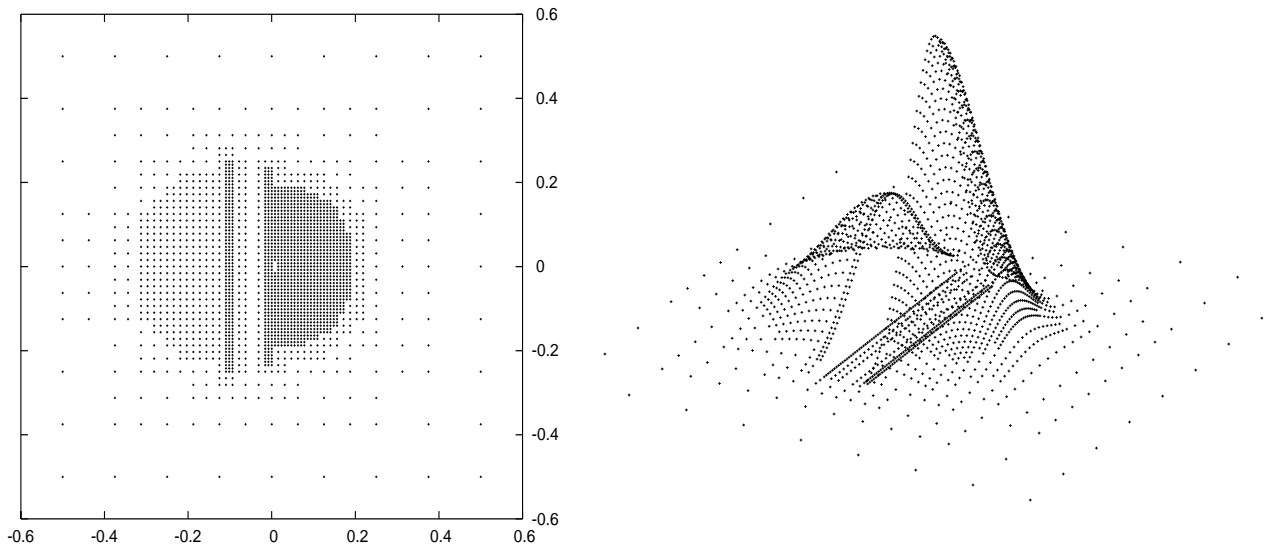


Figure 1. Initial condition function on nonuniform grid: 2D view from the top (left) and the side view (right).

To evaluate numerically the Fourier transform $\hat{f}_m = \int_{\Omega} f(\mathbf{v}) e^{2\pi i(\mathbf{v}, \mathbf{m})} d\mathbf{v}$ we approximate the function f on the grid Ω_v by a piecewise constant function \bar{f}_K with K being the cell of the grid. This gives the formula $\hat{f}_m = C_m \sum_j \bar{f}_j e^{2\pi i(\mathbf{v}_j, \mathbf{m})}$,

where \bar{f}_j is a value of the function \bar{f}_K in a discrete point $\mathbf{v}_j \in \Omega_v$ and C_m is a constant. To compute this trigonometric sum we use the Unequally Spaced Fast Fourier Transform (USFFT) algorithm developed by Beylkin [1]. It is a variant of the standard Fast Fourier Transform especially suitable for nonuniform grids. The computational cost of this algorithm is $O(N_v) + O(M^3 \log M)$, where N_v is the number of discrete velocity points and M denotes the number of modes in the Fourier domain in one direction.

The collision operator is splitted into two parts, thus we discretize independently the gain and the loss parts to get

$$Q^+(f, f)(\mathbf{v}) = \sum_{\mathbf{l}, \mathbf{m}=-M}^{M-1} \hat{f}_l \hat{f}_m \hat{B}(\mathbf{l}, \mathbf{m}) e^{-2\pi i(\mathbf{l}+\mathbf{m}, \mathbf{v})}, \quad q^-(f)(\mathbf{v}) = \sum_{\mathbf{m}=-M}^{M-1} \hat{f}_m \hat{B}(\mathbf{m}, \mathbf{m}) e^{-2\pi i(\mathbf{m}, \mathbf{v})}.$$

To compute the loss part we apply straightforwardly the USFFT algorithm. To efficiently evaluate the gain part we separate variables \mathbf{l} and \mathbf{m} in the kernel $\hat{B}(\mathbf{l}, \mathbf{m})$ using the eigenvalue decomposition. Then we approximate the kernel using only the significant eigenvalues. This greatly reduces the computational effort – due to the special properties of the kernel the number of significant eigenvalues is relatively small. Hence we get the following approximation to the gain term

$$Q^+(f, f)(\mathbf{v}) = \sum_{p=1}^{\sigma} d_r \left[\sum_{\mathbf{m}=-M}^{M-1} \hat{f}_m U_r(\mathbf{m}) e^{-2\pi i(\mathbf{m}, \mathbf{v})} \right]^2,$$

which can be easily evaluated using USFFT algorithm. Here σ is the number of significant eigenvalues of the kernel matrix, which is typically $\frac{1}{8}$ to $\frac{1}{4}$ of the total number for the Maxwellian gas and hard spheres models, and U_r is the eigenvector corresponding to the eigenvalue d_r .

The total computational cost of the numerical approximation of the collision operator is $O(N_v) + O(\sigma M^6 \log M)$.

To justify the method we perform a number of numerical computations. Below we present the result of a sample test – the relaxation problem. We take the sum of two "half"-Maxwellians as the initial function (see Figure 1). Figure 2 shows the 1D cut of the initial function (dashed line) and the relaxed numerical solution (continuous line).

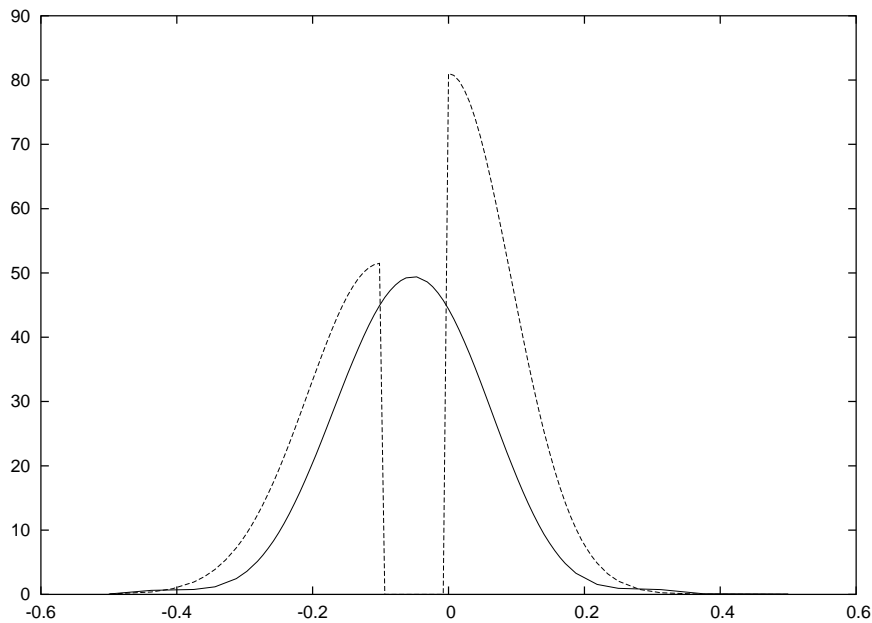


Figure 2. Relaxation problem; 1D cut at $v_y = 0, v_z = 0$.

References

- [1] Beylkin G.: On the Fast Fourier Transform of Functions with Singularities, *Appl. Comp. Harm. Anal.*, 2:363–381, 1995.