

Chapter 2

Natural Convection Heat Transfer From Horizontal Cylinders

Abstract A vast amount of literature exists for natural convection from horizontal cylinders. This chapter separates the field into two main time periods: early investigators and modern developments. Early investigators focused on analytical and experimental techniques, and modern investigations have focused on using computational fluid dynamics. Nusselt number correlations are presented from many sources for natural convection from horizontal cylinders.

Keywords Natural convection · Horizontal cylinder · Experimental · Computational · Analytical · Nusselt numbers

2.1 Introduction

Heat transfer from horizontal cylinders has the most amount of literature out of all of the orientations. This is likely due to the symmetric, two-dimensional nature of horizontal cylinders. According to Morgan [51], who in 1975 published an all-encompassing review article on the natural convection from smooth, circular cylinders, there is a wide dispersion in experimental results due to axial heat conduction losses to the supporting structures of the horizontal cylinders, temperature measurement location, interference of the temperature and velocity fields by convective fluid movements, and the utilization of small containing chambers for the experiments. Champagne et al. [7] showed that the temperature is uniform over at least the center third of a heated cylinder if $L/D > 200$, but many early experimental investigators used cylinders having $L/D < 10$.

At small Rayleigh numbers, the heat transfer from a horizontal cylinder behaves like a line heat source. For larger Rayleigh numbers, i.e., $10^4 \leq Ra_D \leq 10^8$, the flow forms a laminar boundary layer around the cylinder [39]. At even higher Rayleigh numbers, it is expected that the flow becomes turbulent.

2.2 Temperature Boundary Conditions

2.2.1 Early Investigators

One of the earliest studies of natural convection from horizontal cylinders was that of Ayrton and Kilgour in 1892 [4]. In the manuscript, the authors looked at the thermal emission of thin, long horizontal wires with $0.031 \text{ mm} \leq D \leq 0.356 \text{ mm}$ and $790 \leq L/D \leq 9000$ in air. The heat loss of the wires was calculated by multiplying the current by the potential difference in the wire. Morgan [51] correlated the experimental results into the following equation.

$$\text{Nu}_D = 1.61(\text{Gr}_D\text{Pr})^{0.141} \quad (2.1)$$

for $10^{-4} \leq \text{Gr}_D\text{Pr} \leq 3 \times 10^{-2}$.

In 1898 and 1901, Petavel [56, 57] performed experiments on a thin wire with a diameter of 1.1 mm and aspect ratio of $L/D = 403$ in air. Morgan [51] correlated the data

$$\text{Nu}_D = 1.05(\text{Gr}_D\text{Pr})^{0.14} \quad (2.2)$$

for $0.1 \leq \text{Gr}_D\text{Pr} \leq 3 \times 10^2$, and

$$\text{Nu}_D = 0.562(\text{Gr}_D\text{Pr})^{0.25} \quad (2.3)$$

for $3 \times 10^2 \leq \text{Gr}_D\text{Pr} \leq 2 \times 10^5$.

Kennelly et al. [35] studied the free convection from small copper wires in air. The diameter of the wire studied was 26.2 mm, and the aspect ratio was 4540. The correlation of data [51] from that paper results in the following for $10^{-2} \leq \text{Gr}_D\text{Pr} \leq 0.3$.

$$\text{Nu}_D = 0.945(\text{Gr}_D\text{Pr})^{0.118} \quad (2.4)$$

In 1911, Wamsler [69] experimentally determined natural convection from a horizontal thin cylinder in air for $20.5 \text{ mm} \leq D \leq 89 \text{ mm}$ and $34 \leq L/D \leq 147$. The data resulted in the following Nusselt number correlation [51]

$$\text{Nu}_D = 0.480(\text{Gr}_D\text{Pr})^{0.25} \quad (2.5)$$

for $3 \times 10^4 \leq \text{Gr}_D\text{Pr} \leq 3.5 \times 10^6$.

Langmuir [42] performed experiments on horizontal platinum wires in air with diameters between 0.004 cm and 0.0510 cm. Morgan [51] correlated the results

$$\text{Nu}_D = 0.81(\text{Gr}_D\text{Pr})^{0.065} \quad (2.6)$$

for $4.5 \times 10^{-5} \leq \text{Gr}_D\text{Pr} \leq 10^{-2}$, and

$$\text{Nu}_D = 1.12(\text{Gr}_D\text{Pr})^{0.125} \quad (2.7)$$

for $10^{-2} \leq \text{Gr}_D\text{Pr} \leq 0.6$.

In 1922, Davis [14] performed natural convection experiments on thin horizontal wires ($D = 0.0083$ and 0.0155 cm) in several fluids: air, CCl_4 , aniline, olive oil, and glycerin. The following correlation for $10^{-4} \leq \text{Gr}_D\text{Pr} \leq 10^6$ is

$$\text{Nu}_D = 0.47(\text{Gr}_D\text{Pr})^{0.25} \quad (2.8)$$

In 1924, Rice [61] experimentally determined the Nusselt numbers from horizontal cylinders in air. The data correlate into the following equation

$$\text{Nu}_D = \frac{2}{\ln(1 + 2/0.47(\text{Gr}_D\text{Pr})^{1/4})} \quad (2.9)$$

for $10^{-2} \leq \text{Gr}_D\text{Pr} \leq 10^4$. And in 1923 [60], Rice experimentally determined (and Morgan [51] correlated) that

$$\text{Nu}_D = 0.97(\text{Gr}_D\text{Pr})^{0.203} \quad (2.10)$$

for $4 \times 10^3 \leq \text{Gr}_D\text{Pr} \leq 6 \times 10^6$.

Also in 1924, Nelson [53] studied the natural convection of hot wires in various liquids. The experimental study was that of a horizontal cylinder that was 0.033 cm in diameter and 16.9 cm long. Heat loss results were obtained for water and alcohol for $1.4 \leq \text{Gr}_D\text{Pr} \leq 66$ and correlated by Morgan [51]

$$\text{Nu}_D = 1.32(\text{Gr}_D\text{Pr})^{0.102} \quad (2.11)$$

Koch [37] performed experiments in air in 1927. He used cylinders with aspect ratios between 20 and 152. The correlated results [51] are as follows:

For $4 \times 10^3 \leq \text{Gr}_D\text{Pr} \leq 4 \times 10^5$

$$\text{Nu}_D = 0.412(\text{Gr}_D\text{Pr})^{0.25} \quad (2.12)$$

and for $4 \times 10^5 \leq \text{Gr}_D\text{Pr} \leq 6 \times 10^6$

$$\text{Nu}_D = 0.286(\text{Gr}_D\text{Pr})^{0.28} \quad (2.13)$$

In 1929, Nusselt [54] analytically determined heat transfer coefficients for horizontal cylinders in air or liquids for $10^4 \leq \text{Gr}_D\text{Pr} \leq 10^8$.

$$\text{Nu}_D = 0.502(\text{Gr}_D\text{Pr})^{0.25} \quad (2.14)$$

Schurig and Frick [64], in 1930, experimentally determined average Nusselt numbers for horizontal bare conductors in air for $45 \leq L/D \leq 286$ and $2.7 \times 10^3 \leq Gr_D Pr \leq 8.2 \times 10^5$. Their findings were correlated by Morgan [51] and appear below.

$$Nu_D = 0.57(Gr_D Pr)^{0.24} \quad (2.15)$$

In 1932, Ackermann [1] experimentally determined natural convection heat loss from a horizontal cylinder with an aspect ratio of 2.8 in water for $10^7 \leq Gr_D Pr \leq 4.5 \times 10^8$. The following correlation [51] resulted.

$$Nu_D = 0.14(Gr_D Pr)^{0.32} \quad (2.16)$$

Also in 1932, King [36] analytically determined Nusselt numbers for horizontal cylinders in air and/or liquids.

For $10^3 \leq Gr_D Pr \leq 10^6$

$$Nu_D = 0.53(Gr_D Pr)^{0.25} \quad (2.17)$$

and for $10^6 \leq Gr_D Pr \leq 10^{12}$

$$Nu_D = 0.13(Gr_D Pr)^{0.33} \quad (2.18)$$

In 1933, Jodlbauer [33] performed experiments in air with $55 \leq AR \leq 140$ and $3.9 \times 10^4 \leq Gr_D Pr \leq 3.6 \times 10^6$. Morgan [51] correlated the results

$$Nu_D = 0.480(Gr_D Pr)^{0.25} \quad (2.19)$$

Jakob and Linke [32], in 1935, performed experiments in liquids for an aspect ratio of 4.3.

For $10^4 \leq Gr_D Pr \leq 10^8$

$$Nu_D = 0.555(Gr_D Pr)^{0.25} \quad (2.20)$$

and for $10^8 \leq Gr_D Pr \leq 10^{12}$

$$Nu_D = 0.129(Gr_D Pr)^{0.333} \quad (2.21)$$

In 1936, Hermann [31] analytically determined the average Nusselt numbers for horizontal cylinders in gas environments. The following equation is valid for $10^4 \leq Gr_D Pr \leq 5 \times 10^8$.

$$Nu_D = 0.424(Gr_D Pr)^{0.25} \quad (2.22)$$

In 1938, Martinelli and Boelter [47] (along with a similar study in 1940 [48]) studied the effect of vibration on the heat transfer by natural convection from a horizontal cylinder. The investigators placed a heated cylinder that was 19.05 mm (0.75 in.) and

320.675 mm (12.625 in.) long. The investigators found a critical Reynolds number, based on the angular velocity of the vibrations and the ratio of the displacement amplitude to the tube diameter, for which the effects of the vibrations increased the rate of heat transfer. The authors caution the reader about the results because the work revealed that the diameter–displacement amplitude ratio was a descriptive variable; however, the effect of this variable was not discernible in the experiments.

In 1942, Lander [41] presented Nusselt number curves for natural convection from horizontal cylinders for gases and liquids. The following correlation is for $10^3 \leq Gr_D Pr \leq 10^7$

$$Nu_D = 0.49(Gr_D Pr)^{0.25} \quad (2.23)$$

and for $10^8 \leq Gr_D Pr \leq 10^9$

$$Nu_D = 0.12(Gr_D Pr)^{0.33} \quad (2.24)$$

In 1948, Elenbaas [18] determined that for horizontal cylinders

$$Nu_D \exp(-6/Nu_D) = \frac{Gr_D Pr}{235 f(Gr_D Pr)} \quad (2.25)$$

where $f(Gr_D Pr)$ has been determined experimentally. For $Gr_D Pr < 10^4$, $f(Gr_D Pr) = 1$.

Senfleben [65] in 1951 for air, gases, and liquids determined the average Nusselt numbers for horizontal cylinders. For $10^5 \leq Gr_D Pr \leq 10^8$

$$Nu_D = \frac{2}{X} \left[1 - \frac{0.033}{X(Gr_D Pr)^{0.25}} \left\{ \left(1 + \frac{X(Gr_D Pr)^{0.25}}{0.033} \right)^{0.5} - 1 \right\} \right] \quad (2.26)$$

where

$$X = \ln \left[1 + \frac{4.5}{(Gr_D Pr)^{0.25}} \right] \quad (2.27)$$

and for *large* values of $Gr_D Pr$

$$Nu_D = 0.41(Gr_D Pr)^{0.25} \quad (2.28)$$

In 1953, Kyte et al. [40] investigated the effect of reduced pressure (0.1 mmHg to atmospheric) on the natural convection of horizontal cylinders. At reduced pressures, the thickness of the boundary layer becomes large, the gas becomes rarefied, and free-molecule conduction becomes important. Kyte et al. experimentally determined the

average Nusselt numbers for a cylinder of diameter 0.078 mm and aspect ratio of 1910. For $10^{-7} \leq Gr_D Pr \leq 10^{1.5}$

$$Nu_D = \frac{2}{\ln [1 + 7.09/(Gr_D Pr)^{0.37}]} \quad (2.29)$$

and for $10^{1.5} \leq Gr_D Pr \leq 10^9$

$$Nu_D = \frac{2}{\ln [1 + 5.01/(Gr_D Pr)^{0.26}]} \quad (2.30)$$

In 1954, Collis and Willams [13] performed experiments on horizontal platinum wires with $0.0003 \text{ cm} \leq D \leq 0.0041 \text{ cm}$ in air. In order to establish negligible end effects, all wires had an aspect ratio $L/D \geq 20,000$. For $10^{-10} \leq Gr_D Pr \leq 10^{-3}$, Morgan [51] correlated the results

$$Nu_D = 0.675(Gr_D Pr)^{0.058} \quad (2.31)$$

Etemad [19], in 1955, performed natural convection experiments on rotating horizontal cylinders in air. The cylinders had diameters of 60.4 and 63.5 mm, and aspect ratios of 7.1 and 7.5, respectively. Etemad tested both rotating cylinders and stationary cylinders. For the stationary cylinders, Etemad found that for $1.2 \times 10^5 \leq Gr_D Pr \leq 1.3 \times 10^6$, the average Nusselt number is

$$Nu_D = 0.456(Gr_D Pr)^{0.25} \quad (2.32)$$

In 1955, another investigator who studied the effect of vibration on natural convection heat transfer was Lemlich [43]. Lemlich experimentally studied heated wires with a diameter of 1.01 mm and aspect ratio of 917 in air. For the case with no vibration and $6 \times 10^2 \leq Gr_D Pr \leq 6 \times 10^3$, Morgan [51] correlated the experimental data into the following equation

$$Nu_D = 0.45(Gr_D Pr)^{0.22} \quad (2.33)$$

In 1956, van Der Hegge Zijnen [68] combined correlation equations found in the literature into a single correlation equation with a wider range of applicability. He reviewed the current literature and took the empirical correlations of Rice [61] (Eq. 2.9), Elenbaas [18] (Eq. 2.25), and Senftleben [65] (Eq. 2.26) and combined them into a single correlation shown below.

$$Nu_D = 0.35 + 0.25(Gr_D Pr)^{1/8} + 0.45(Gr_D Pr)^{1/4} \quad (2.34)$$

For low Grashof number, in 1956, Fischer and Dosch [25] experimentally determined average Nusselt numbers in air for horizontal cylinders with diameters of

0.0022–0.114 mm and aspect ratios between 807 and 12800. For $3 \times 10^{-5} \leq Gr_D Pr \leq 8 \times 10^{-3}$. Morgan [51] developed the following correlation

$$Nu_D = 0.862(Gr_D Pr)^{0.0678} \quad (2.35)$$

In 1956, Beckers et al. [6] performed natural convection experiments on very thin horizontal platinum wires (0.025–0.66 mm) in air, alcohol, paraffin oil, and water at very low Grashof numbers $10^{-8} \leq Gr_D \leq 1$. They concluded that at very low Grashof numbers, the Nusselt number is not dependent on the Prandtl number. The correlation given in [6] is

$$Nu_D = 0.95 Gr_D^{0.08} \quad (2.36)$$

In 1958, Kays and Bjorklund [34] experimentally determined heat transfer coefficients for rotating horizontal cylinders. As part of their study, they tested nonrotating cylinders. Their experimental data verified the correlations presented by Etemad [19], Eq. (2.32), and McAdams [49].

In 1960, Tsubouchi and Sato [66] experimentally determined natural convection coefficients for horizontal wires in air. The range of diameters used in the study was from 0.00489 to 0.061 mm and anywhere from 40 to 150 mm long depending on the wire diameter. For $10^{-8} \leq Gr_D \leq 10^{-1}$

$$Nu_D = 0.812 Gr_D^{1/15} \quad (2.37)$$

In 1961, Fand and Kaye [20] investigated the effect of acoustic vibrations on the natural convection from horizontal cylinders in air. The test specimen was a cylinder that was 19 mm in diameter and 159 mm long. For a baseline case, Fand and Kaye determined the heat transfer from the cylinder without sound. These data were correlated by Morgan [51] and presented here for $10^4 \leq Gr_D Pr \leq 4 \times 10^4$

$$Nu_D = 0.485(Gr_D Pr)^{0.25} \quad (2.38)$$

Rebrov [59], in 1961, performed natural convection experiments on horizontal cylinders with $1.31 \text{ mm} \leq D \leq 9.9 \text{ mm}$ and $61 \leq L/D \leq 458$ in rarefied air for $10^{-7} \leq Gr_D Pr \leq 4 \times 10^8$. The experimental results were correlated into the following equation

$$Nu_D = \left[0.98 - 0.01(\log Gr_D Pr)^2 \right] (Gr_D Pr)^x \quad (2.39)$$

where x is

$$x = 0.14 + 0.015 \log(Gr_D Pr) \quad (2.40)$$

Also in 1961, Zhukauskas et al. [73] studied the effect of ultrasonic waves on the heat transfer of bodies in water and oils. The diameter of the horizontal cylinder was 8 mm, and the aspect ratio was approximately 20. For the baseline case without ultrasound, the following average Nusselt number expression was obtained.

$$\text{Nu}_D = 0.50(\text{Gr}_D\text{Pr})^{0.25} \quad (2.41)$$

The preceding equation is good for $1.5 \times 10^4 \leq \text{Gr}_D\text{Pr} \leq 2.5 \times 10^6$.

In 1962, Deaver et al. [15] experimentally investigated the effect of oscillations on a horizontal wire of 0.178 mm diameter and approximately 2 m long in water. For the case without the vibrations, the average Nusselt number was found to be

$$\text{Nu}_D = 1.15(\text{Gr}_D\text{Pr})^{0.15} \quad (2.42)$$

for $0.2 \leq \text{Gr}_D\text{Pr} \leq 20$.

In 1963, Fand and Kaye [21] studied the effect of vertical vibrations on the heat transfer of a 22.2-mm-diameter cylinder in air with an aspect ratio of approximately 25. Morgan [51] correlated the data for the control case (no vibration) which resulted in the following equation

$$\text{Nu}_D = 0.495(\text{Gr}_D\text{Pr})^{0.25} \quad (2.43)$$

for $2 \times 10^4 \leq \text{Gr}_D\text{Pr} \leq 6 \times 10^4$.

Another study on the effect of vibration on the natural convection from horizontal cylinders was done by Lemlich and Rao [44] in 1965. Lemlich and Rao tested a cylinder with $D = 1.25$ mm and $L = 490$ mm in water and glycerin. For the case with no vibration, Morgan [51] correlated the data. For $1.8 \times 10^2 \leq \text{Gr}_D\text{Pr} \leq 1.9 \times 10^3$

$$\text{Nu}_D = 0.58(\text{Gr}_D\text{Pr})^{0.25} \quad (2.44)$$

In 1966, Tsubouchi and Masuda [67] performed natural convection experiments in air on horizontal cylinders which were 21.5 mm in diameter and 200 mm in length. The purpose of the study was to compare cylinders with grooved surfaces with cylinders of smooth surfaces. For the smooth-surfaced cylinders, Tsubouchi and Masuda developed the following formula for $2.3 \times 10^4 \leq \text{Gr}_D \leq 7.5 \times 10^4$

$$\text{Nu}_D = 0.44 \text{Gr}_D^{0.25} \quad (2.45)$$

Also in 1966, Penney and Jefferson [55] performed experiments to investigate the heat transfer from an oscillating horizontal wire to water and ethylene glycol. The diameter of the wire was 0.20 mm, and the aspect ratio of the wire was 752. As a baseline check, Penney and Jefferson obtained data for free convection (no oscillations) only. The experimental data were correlated by Morgan [51] for $0.25 \leq \text{Gr}_D\text{Pr} \leq 30$ and is displayed below

$$\text{Nu}_D = 1.08(\text{Gr}_D\text{Pr})^{0.213} \quad (2.46)$$

In 1967, Saville and Churchill [63] did a theoretical and analytical study of laminar free convection in boundary layers of horizontal cylinders. They found that for $\text{Pr} = 0.7$

$$\text{Nu}_D = 0.548 \text{Ra}_D^{1/4} \quad (2.47)$$

Saville and Churchill also investigated the limits for which Pr approaches 0 and infinity [12]. For $\text{Pr} \rightarrow 0$

$$\text{Nu}_D = 0.599 \text{Ra}_D^{1/4} \quad (2.48)$$

and for $\text{Pr} \rightarrow \infty$

$$\text{Nu}_D = 0.518 \text{Ra}_D^{1/4} \quad (2.49)$$

Also in 1967, Mabuchi and Tanaka [46] studied the effect of vibration on natural convection on horizontal wires. The fluids tested were air, water, and ethylene glycol. An experiment on the natural convection only was conducted for cylinders with diameters between 0.03 and 0.20 mm and with aspect ratios ranging from 737 to 4790. For $5 \times 10^{-3} \leq \text{Gr}_D\text{Pr} \leq 3$, the following correlation holds

$$\text{Nu}_D = 1.02(\text{Gr}_D\text{Pr})^{0.10} \quad (2.50)$$

Li and Parker [45], in 1967, investigated the effects of acoustics on the natural convection from horizontal wires in water. A wire with a diameter of 0.20 mm was the test specimen. For the case with no acoustic effects and for $5 \leq \text{Gr}_D\text{Pr} \leq 61$, Morgan [51] correlated the results into the following equation

$$\text{Nu}_D = 0.35(\text{Gr}_D\text{Pr})^{0.32} \quad (2.51)$$

In 1968, Bansal and Chandna [5] published an article on free convection from horizontal cylinders. The investigators claim that the new correlation which is presented is valid for any fluid. The data are good for Gr_DPr between 10^{-5} and 10^{10}

$$\begin{aligned} & [\log(\text{Nu}_D)]^2 + \left[\frac{a \log(\text{Gr}_D\text{Pr}) + d}{b} \right] \log(\text{Nu}_D) \\ & + \frac{1}{b} \log(\text{Gr}_D\text{Pr})[c + \log(\text{Gr}_D\text{Pr})] + \frac{e}{b} = 0 \end{aligned} \quad (2.52)$$

where $a = -26.9268$, $b = 80.3767$, $c = -11.3983$, $d = 94.5623$, and $e = 1.9590$.

In 1968, Weder [71] performed natural convection experiments on horizontal cylinders in sodium hydroxide. The diameter of the cylinder was 26.2 mm, and the

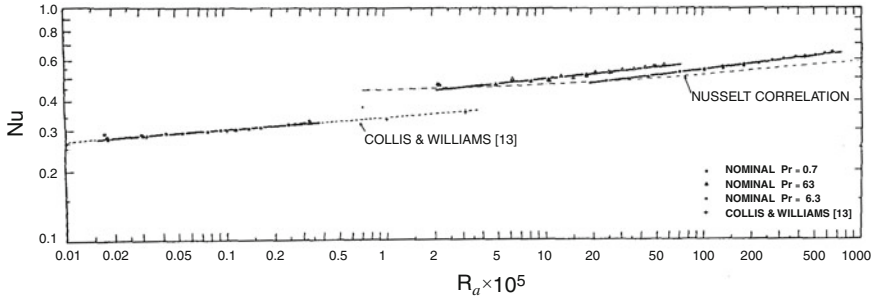


Fig. 2.1 Average Nusselt numbers versus Rayleigh number for $Pr = 0.7, 6.3,$ and 63

aspect ratio was 4. For $6 \times 10^3 \leq Gr_D Pr \leq 6 \times 10^6$, the following correlation is given

$$Nu_D = 0.858(Gr_D Pr)^{0.22} \quad (2.53)$$

Hatton et al. [30] investigated both forced and natural convection low-speed airflow over horizontal cylinders in 1970. The cylinders tested had $0.10 \text{ mm} \leq D \leq 1.26 \text{ mm}$ and $96 \leq L/D \leq 1190$. The investigators, experimentally determined the average Nusselt numbers for the case of no forced airflow (natural convection only) for $4 \times 10^{-3} \leq Gr_D Pr \leq 10$

$$Nu_D = 0.525 + 0.422(Gr_D Pr)^{0.315} \quad (2.54)$$

In 1970, Gebhart, Audunson, and Pera [28, 29] published a series of articles on natural convection from long horizontal cylinders in air with a diameter of 0.01 mm and for $996 \leq L/D \leq 16200$ and for $Pr = 0.7, 6.3$ and 63 . The experimental results are summarized in Fig. 2.1 from [29].

2.2.2 Modern Developments

Around the same time as the review article on Morgan [51] appeared, Churchill and Chu [9] published an article on laminar and turbulent natural convection from a horizontal cylinder. For the laminar regime, they took the limiting Nusselt number expressions of Saville and Churchill [63], seen in Eqs. (2.48 and 2.49), and used a form suggested by Churchill and Usagi [10] as well as considered the limiting value of the Nusselt number found by Tsubouchi and Masuda [67] in order to obtain the following expression for the average Nusselt number for horizontal cylinders

$$\text{Nu}_D = 0.36 + 0.518 \left(\frac{\text{Gr}_D \text{Pr}}{[1 + (0.559/\text{Pr})^{9/16}]^{16/9}} \right)^{1/4} \quad (2.55)$$

The preceding correlating equation matches well with experimental data for all Prandtl numbers in the range of $10^{-6} \leq \text{Gr}_D \text{Pr} \leq 10^9$. The equation, however, did not match well with the experimental data for very low values of $\text{Gr}_D \text{Pr} \leq 10^{-6}$ which were the experimental data of Collis and Williams [13]. Another correlation, good for $10^{-11} \leq \text{Gr}_D \text{Pr} \leq 10^9$, was also developed by Churchill and Chu and is shown below

$$\text{Nu}_D^{1/2} = 0.60 + 0.387 \left(\frac{\text{Gr}_D \text{Pr}}{[1 + (0.559/\text{Pr})^{9/16}]^{16/9}} \right)^{1/6} \quad (2.56)$$

Nakai and Okazaki [52], in 1975, performed an analytical study on natural convection from small horizontal wires for low values of the Grashof number using an asymptotic matching technique. The results were compared with the experimental results of Collis and Williams [13] and valid for $10^{-9} \leq \text{Gr}_D \leq 10^{-1}$

$$\frac{2}{\text{Nu}_D} = \frac{1}{3} \ln E - \frac{1}{3} \ln \left(\frac{\text{Nu}_D \text{Gr}_D}{16} \right) \quad (2.57)$$

where

$$E = 3.1(\text{Pr} + 9.4)^{1/2} \text{Pr}^{-2} \quad (2.58)$$

In 1976, Kuehn and Goldstein [38] presented a correlation for natural convection heat transfer from a horizontal cylinder which is valid at any Rayleigh and Prandtl number

$$\frac{2}{\text{Nu}_D} = \ln \left[1 + \frac{2}{\left[\left\{ 0.518 \text{Ra}_D^{1/4} \left[1 + \left(\frac{0.559}{\text{Pr}} \right)^{3/5} \right]^{-5/12} \right\}^{15} + (0.1 \text{Ra}_D^{1/3})^{15} \right]^{1/15}} \right] \quad (2.59)$$

In 1977, Fand et al. [22] conducted an experimental study for natural convection heat transfer from horizontal cylinders to air, water, and silicone oils ($0.7 \leq \text{Pr} \leq 3090$) for $2.5 \times 10^2 \leq \text{Gr}_D \text{Pr} \leq 2 \times 10^7$. The investigators correlated their data according to which temperature the fluid properties were evaluated. For the fluid properties evaluated at the mean film reference temperature, the correlation is

$$\text{Nu}_D = 0.474 \text{Ra}_D^{0.25} \text{Pr}^{0.047} \quad (2.60)$$

In 1979, Fujii et al. [26] performed a numerical analysis of natural convection about an isothermal horizontal cylinder for $10^{-4} \leq Gr_D \leq 10^4$ and $Pr = 0.7, 10$, and 100 .

$$\frac{2}{Nu_D} = \ln \left[1 + \frac{4.065}{C(Pr)Ra_D^m} \right] \quad (2.61)$$

where

$$m = \frac{1}{4} + \frac{1}{10 + 4 Ra_D^{1/8}} \quad (2.62)$$

and

$$C(Pr) = \frac{0.671}{[1 + (0.492/Pr)^{9/16}]^{4/9}} \quad (2.63)$$

The authors in [26] claim the above expression agrees well with experimental data in the range $10^{-10} \leq Gr_D Pr \leq 10^7$.

In 1980, Kuehn and Goldstein [39] solved the complete Navier-Stokes and energy equations for natural convection heat transfer from a horizontal isothermal cylinder, which allowed for full plume development. The authors state that previous solutions including boundary-layer assumptions and asymptotic matching solutions are not accurate over the range of $10^0 \leq Gr_D Pr \leq 10^7$. Kuehn and Goldstein employed a finite-difference overrelaxation technique to solve the equations numerically. The data are presented in Table 2.1. In the table, theta is the angular coordinate. See Fig. 2.2 for a schematic diagram of the relevant angles for horizontal cylinders. The data were experimentally verified by Kuehn and Goldstein.

Farouk and Güçeri [24], in 1981, numerically solved for laminar heat transfer from horizontal cylinders. They compared their results with the results of Kuehn and Goldstein [39] and found good agreement.

In 1982, Fujii et al. [27] performed analytical and experimental studies on a thin, horizontal wire. The experimental study was done on a platinum wire that was 0.470 mm in diameter and 238 and 334 mm long situated in air ($Pr = 0.7$). The experimental results, for $Ra_D = 0.37$, which were read from the figure in [27] are listed in Table 2.2.

Furthermore, Fujii et al. adjusted the correlation (Eqs. 2.61–2.63) found in [26] to match their present experimental data. The new correlation is as follows

$$\frac{2}{Nu_D} = \ln \left[1 + \frac{3.3}{C(Pr)Ra_D^m} \right] \quad (2.64)$$


where

$$m = \frac{1}{4} + \frac{1}{10 + 5 Ra_D^{0.175}} \quad (2.65)$$

Table 2.1 Local and average Nusselt numbers from Kuehn and Goldstein [39]

Ra_D^*	Pr	Nu_θ							Nu_D
		$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°	
10^0	0.7	1.41	1.37	1.25	1.08	0.87	0.68	0.56	1.04
10^1	0.7	1.83	1.79	1.67	1.47	1.21	0.94	0.81	1.40
10^2	0.7	2.71	2.66	2.51	2.23	1.80	1.27	0.97	2.05
10^3	0.7	3.89	3.85	3.72	3.45	2.93	2.01	1.22	3.09
10^4	0.7	6.24	6.19	6.01	5.64	4.85	3.14	1.46	4.94
10^5	0.7	10.15	10.03	9.65	9.02	7.91	5.29	1.72	8.00
10^6	0.7	16.99	16.78	16.18	15.19	13.60	9.38	2.12	13.52
10^7	0.7	29.41	29.02	27.95	26.20	23.46	16.48	2.51	23.32
10^4	0.01	3.63	3.56	3.17	2.51	1.74	1.13	0.93	2.40
10^4	0.1	5.25	5.16	4.89	4.34	3.26	1.84	1.12	3.78
10^4	1.0	6.40	6.33	6.10	5.69	4.91	3.36	1.48	5.06
10^4	5.0	6.89	6.82	6.59	6.19	5.55	4.35	1.74	5.66
10^4	10.0	7.01	6.93	6.69	6.29	5.71	4.67	1.79	5.81

Fig. 2.2 Angles of horizontal cylinders

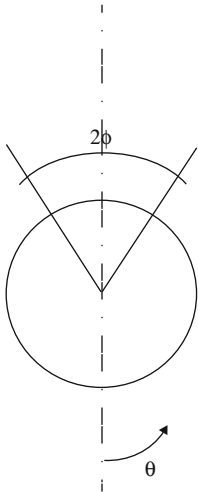

and

$$C(Pr) = \frac{0.671}{[1 + (0.492/Pr)^{9/16}]^{4/9}} \tag{2.66}$$

In 1983, de Socio [17] experimentally investigated laminar free convection about horizontal cylinders that were partly isothermal and partly adiabatic. The motivation for this study was to determine the heat transfer around metal tubes which were

Table 2.2 Local Nusselt numbers from Fujii et al. [27]

Ra_D	Pr	Nu_θ						
		$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°
0.37	0.7	1.0	0.98	0.95	0.90	0.80	0.70	0.65

partially covered by snow or ice or around tubes that had an internal layer of deposits that affected heat transfer performance. Three cylinders were tested, each having a diameter of 37 mm and a length of 0.5 mm. Referring to Fig. 2.2, in two of the cylinders, a wedge of either $\phi = 45^\circ$ or 90° was removed and replaced with an insulated Teflon (adiabatic) section. The experiments were performed for $1.5 \times 10^4 \leq Gr_D Pr \leq 6 \times 10^5$ and $Pr = 0.7$. The results are correlated with the following equation.

$$Nu_D = B(Gr_D Pr)^m \quad (2.67)$$

where B and m are defined in Table 2.3.

Al-Arabi and Khamis [2] experimentally determined average Nusselt numbers for air ($Pr = 0.7$). The isothermal boundary condition was employed using steam condensation.

For laminar flow and $1.08 \times 10^4 \leq Gr_D \leq 6.9 \times 10^5$ and $Gr_L Pr \geq 9.88 \times 10^7$, the average Nusselt number is

$$Nu_L = 0.58(Gr_L Pr)^{1/3} Gr_D^{-1/12} \quad (2.68)$$

Al-Arabi and Khamis also experimentally determined local Nusselt numbers for air.

For laminar flow and $1.08 \times 10^4 \leq Gr_D \leq 6.9 \times 10^5$ and $Gr_x Pr \geq 1.63 \times 10^8$, the local Nusselt number is

$$Nu_x = 0.58(Gr_x Pr)^{1/3} Gr_D^{-1/12} \quad (2.69)$$

Also in 1982, Farouk and Güçeri used the $k-\epsilon$ turbulence model to solve the turbulent natural convection about a horizontal cylinder. Numerical results are presented for $Pr = 0.721$ and $5 \times 10^7 \leq Gr_D \leq 10^{10}$. The authors compared their data to the

Table 2.3 Coefficients and exponents for Eq. (2.67)

ϕ	B	m
0 (isothermal)	0.488	0.146
45	0.543	0.239
90 (adiabatic top)	0.581	0.241
90 (adiabatic bottom)	0.569	0.236

correlations of Churchill and Chu (Eq. 2.56) and Kuehn and Goldstein (Eq. 2.59) and found good agreement with the correlation of Kuehn and Goldstein.

Wang et al. [70], in 1990, numerically computed the natural convection heat transfer from a horizontal cylinder with differing boundary condition using a spline fractional step method. Unlike previous researchers, Wang et al. solved for both the boundary layer and the resultant plume. The investigators present three cases: uniform heat flux (which will be presented in the next section), isothermal surface (which will be presented here), and mixed boundary conditions. The results for the isothermal surface are presented in Table 2.4.

The results in Table 2.4 are in good agreement with those of Kuehn and Goldstein [39] which are displayed in Table 2.1.

In 1993, Saitoh et al. [62] set forth to find benchmark solutions for the natural convection heat transfer around a horizontal isothermal cylinder. The authors of [62] employed five different kinds of numerical methodologies: (a) the ordinary explicit finite-difference method (FDM), (b) the multi-point FDM with uniform mesh, (c) the multi-point FDM with two computation domains, (d) the multi-point FDM with logarithmic coordinate transformation, and (e) the multi-point FDM with logarithmic coordinate transformation and a solid boundary condition. The results for an isothermal boundary condition are listed in Table 2.5 for the multi-point FDM with logarithmic coordinate transformation and a solid boundary condition finite-difference scheme.

The results in Table 2.5 agree well with the results of Kuehn and Goldstein and Wang et al.

Table 2.4 Local and average Nusselt numbers from Wang et al. [70]

Ra_D	Nu_θ							Nu_D
	$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°	
10^3	3.86	3.82	3.70	3.45	2.93	1.98	1.20	3.06
10^4	6.03	5.98	5.80	5.56	4.87	3.32	1.50	4.86
10^5	9.80	9.69	9.48	8.90	8.00	5.80	1.94	7.97
10^6	16.48	16.29	15.95	14.85	13.35	10.58	2.52	13.46
10^7	28.27	27.98	26.95	25.40	23.00	19.68	4.20	23.29
2×10^7	33.46	33.07	31.92	30.07	27.18	23.38	5.42	27.58

Table 2.5 Local and average Nusselt numbers from Saitoh et al. [62]

Ra_D	Nu_θ							Nu_D
	$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°	
10^3	3.813	3.772	3.640	3.374	2.866	1.975	1.218	3.024
10^4	5.995	5.935	5.750	5.410	4.764	3.308	1.534	4.826
10^5	9.675	9.557	9.278	8.765	7.946	5.891	1.987	7.898

Table 2.6 Local and average Nusselt numbers from Chouikh et al. [8]

Ra_D	Nu_θ			Nu_D
	$\theta = 0^\circ$	90°	180°	
10^1	1.789	1.417	0.803	3.024
10^2	2.681	2.197	0.913	4.831
10^3	3.821	3.392	1.219	3.029
10^4	6.023	5.433	1.539	4.831
10^5	9.694	8.798	1.991	7.911
10^6	16.12	14.948	2.144	13.216

Chouikh et al. [8], in 1998, expanded the work of Saitoh et al. [62]. They numerically solved the conservation of mass, momentum, and energy equations via the vorticity-stream function approach. Their results for $10^1 \leq Gr_D Pr \leq 10^6$ are shown in Table 2.6.

Recently, in 2009, Atayilmaz and Teke [3] performed experimental and numerical studies on natural convection from horizontal cylinders. The authors in [3] claim that although the subject has been studied extensively for over 50 years, discrepancies in all of the data still exist due to various factors. Further, the motivating application of Atayilmaz and Teke is heat exchangers used in small refrigeration applications ($D = 4.8$ and 9.45 mm) and the authors state that there has been no investigation of this particular diameter. Based on the experimental data, the following correlation was proposed for $7.4 \times 10^1 \leq Gr_D Pr \leq 3.4 \times 10^3$ and $Pr = 0.7$

$$Nu_D = 0.954(Gr_D Pr)^{0.168} \quad (2.70)$$

Atayilmaz and Teke compared their experimental results with that of Morgan [51], Churchill and Chu [9], and Fand and Brucker [23] and found agreement to within 20 %. For the numerical portion, the authors compared their results to that of Merkin [50] who also did a numerical simulation. The two sets of results follow the same trend, but are not in good agreement.

2.3 Heat Flux Boundary Conditions

According to Dyer [16], up until his current investigation in 1965, studying natural convection from horizontal cylinders with a uniform heat flux boundary condition appeared to be neglected in the literature. Therefore, Dyer did both a theoretical and an experimental study. The theoretical study, which is valid for $10^3 \leq Gr_D^* Pr \leq 10^{10}$ yielded

$$Nu_D = 0.61(Gr_D^* Pr)^{0.192} \quad (2.71)$$

The experimental results, which were conducted in air using an electrically heated horizontal cylinder that was 7.7 cm in diameter, validated the analytical results.

In 1972, Wilks [72] did a theoretical study of natural convection from two-dimensional bodies with constant heat flux using the boundary-layer approximation. The results in [72] were correlated by Churchill [11] into the following equation

$$\text{Nu}_D = 0.579 \left(\frac{\text{Gr}_D \text{Pr}}{[1 + (0.442/\text{Pr})^{9/16}]^{16/9}} \right)^{1/4} \quad (2.72)$$

The values of the average Nusselt number were obtained by averaging the local values calculated by Wilks [72]. Churchill and Chu [12] decided to leave this expression in terms of $\text{Gr}_D \text{Pr}$ instead of $\text{Gr}_D^* \text{Pr}$ in order to show that the dependence of Nu_D on $\text{Gr}_D \text{Pr}$ was the same for both isothermal and uniform heat flux situations.

In 1987, Qureshi and Ahmad [58] performed a numerical solution of the full Navier-Stokes and energy equations for a uniform heat flux cylinder in air ($\text{Pr} = 0.7$). The results are presented in Table 2.7 for $10^{-2} \leq \text{Gr}_D^* \text{Pr} \leq 10^7$.

Qureshi and Ahmad correlated the results for $10^0 \leq \text{Gr}_D^* \text{Pr} \leq 10^7$ and $\text{Pr} = 0.7$ with the following equation.

$$\text{Nu}_D = 0.800(\text{Gr}_D^* \text{Pr})^{0.175} \quad (2.73)$$

For $\text{Gr}_D^* \text{Pr} \leq 10^0$, the average Nusselt numbers may be predicted by correlations for isothermal cylinders.

In 1990, Wang et al. [70] numerically computed the natural convection heat transfer from a horizontal cylinder with differing boundary condition using a spline fractional step method. The results for the uniform heat flux case are shown in Table 2.8.

Wang et al. [70] compared their results with Wilks [72], Churchill [11], and Qureshi and Ahmad [58] and found good agreement.

Table 2.7 Local and average Nusselt numbers from Qureshi and Ahmad [58]

Ra_D^*	Nu_θ							Nu_D
	$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°	
10^{-2}	0.48	0.47	0.47	0.46	0.53	0.45	0.45	0.46
10^{-1}	0.70	0.70	0.69	0.68	0.68	0.67	0.67	0.68
10^0	0.93	0.92	0.90	0.86	0.82	0.79	0.78	0.86
10^1	1.34	1.32	1.28	1.20	1.11	1.03	1.00	1.19
10^2	2.06	2.05	1.99	1.88	1.70	1.48	1.38	1.80
10^3	3.03	3.02	2.96	2.83	2.59	2.17	1.88	2.67
10^4	4.50	4.47	4.39	4.23	3.94	3.30	2.57	3.98
10^5	6.76	6.72	6.58	6.35	5.95	5.10	3.50	5.97
10^6	10.23	10.16	9.95	9.59	9.04	7.84	4.85	9.02
10^7	15.50	15.39	15.08	14.57	13.77	12.07	6.88	13.70

Table 2.8 Local and average Nusselt numbers from Wang et al. [70]

Ra_D^*	Nu_θ							Nu_D
	$\theta = 0^\circ$	30°	60°	90°	120°	150°	180°	
10^6	9.87	9.83	9.60	9.24	8.94	7.91	5.02	8.88
10^7	15.04	15.00	14.72	14.08	13.58	12.28	7.14	13.57
10^8	23.12	22.84	22.57	21.92	20.85	19.63	10.87	21.00
2.5×10^8	28.05	27.34	26.98	26.18	25.01	23.17	12.26	25.08

References

1. Ackermann G (1932) Die Wärmeabgabe eines horizontalen geheizten Rohres an kaltes Wasser bei natürlicher Konvektion. *Forsch Gebiete Ingenieurw* 3:42–50
2. Al-Arabi M, Khamis M (1982) Natural convection heat transfer from inclined cylinders. *Int J Heat Mass Transf* 25:3–15
3. Atayilmaz ŞÖ, Teke I (2009) Experimental and numerical study of the natural convection from a heated horizontal cylinder. *Int Commun Heat Mass* 36:731–738
4. Ayrton W, Kilgour H (1892) The thermal emissivity of thin wires in air. *Philos TR Soc A* 183:371–405
5. Bansal T, Chandna R (1968) Empirical relationship for computation of free convection from a single horizontal cylinder to fluids. *Indian J Technol* 6:223–225
6. Beckers H, Haar LT, Tjoan LT, Merk H, Prins J, Schenk J (1956–1957) Heat transfer at very low Grashof and Reynolds numbers. *Appl Sci Res* 6:82–84
7. Champagne FH, Sleicher C, Wehrmann O (1967) Turbulence measurements with inclined hot wires. *J Fluid Mech* 28:153–175
8. Chouikh R, Guizani A, Maalej M, Belghith A (1998) Numerical study of the laminar natural convection flow around horizontal isothermal cylinder. *Renew Energy* 13:77–88
9. Churchill SW, Chu HHS (1975) Correlating equations for laminar and turbulent free convection from a vertical plate. *Int J Heat Mass Transf* 18:1323–1329
10. Churchill S, Usagi R (1972) A general expression for the correlation of rates of transfer and other phenomena. *AICHE J* 18:1121–1128
11. Churchill S (1974) Laminar free convection from a horizontal cylinder with a uniform heat flux density. *Lett Heat Mass Transf* 1:109–112
12. Churchill S, Chu H (1975) Correlating equations for laminar and turbulent free convection from a horizontal cylinder. *Int J Heat Mass Transf* 18:1049–1053
13. Collis DC, Williams M (1954) Free convection of heat from fine wires. *Aeronaut Res Lab* 140:1–23
14. Davis A (1922) Natural convective cooling in fluids. *Phil Mag* 44:920–940
15. Deaver F, Penney W, Jefferson T (1962) Heat transfer from an oscillating horizontal wire to water. *J Heat Transf* 84:251–256
16. Dyer J (1965) Laminar natural convection from a horizontal cylinder with a uniform convective heat flux. *Trans Inst Eng Aust MC1*:125–128
17. de Socio L (1983) Laminar free convection around horizontal circular cylinders. *Int J Heat Mass Transf* 26:1669–1677
18. Elenbaas W (1948) Dissipation of heat by free convection. *Philips Res Rep* 3:338–360
19. Etemad G (1955) Free convection heat transfer from a rotating horizontal cylinder to ambient air with interferometric study of flow. *Trans ASME* 77:1283–1289
20. Fand RM, Kaye J (1961) The influence of sound on free convection from a horizontal cylinder. *J Heat Transf* 83:133–148

21. Fand R, Kaye J (1963) The influence of vertical vibrations on heat transfer by free convection from a horizontal cylinder. *Int Dev Heat Transfer Proc Heat Transf Conf* 1961:490–498
22. Fand R, Morris E, Lum M (1977) Natural convection heat transfer from horizontal cylinders to air, water, and silicone oils for Rayleigh numbers between 3×10^2 and 2×10^7 . *Int J Heat Mass Transf* 20:1173–1184
23. Fand R, Brucker J (1983) A correlation for heat transfer by natural convection from horizontal cylinders that accounts for viscous dissipation. *Int J Heat Mass Transf* 26:709–726
24. Farouk B, Güçeri SI (1981) Natural convection from a horizontal cylinder-laminar regime. *J Heat Transf* 103:522–527
25. Fischer J, Dosch F (1956) Die Wärmeübertragung dünner stromdurchflossener Drähte un Luft von Normalzustand bei freier Konvektion. *Z Angew Phys* 8:292–297
26. Fujii T, Fujii M, Matsunaga T (1979) A numerical analysis of laminar free convection around an isothermal horizontal circular cylinder. *Numer Heat Transf* 2:329–344
27. Fujii T, Fujii M, Honda T (1982) Theoretical and experimental studies of the free convection around a long horizontal thin wire in air. In: *Proceedings of the 7th international heat transfer conference*, vol 6. Munich, Germany, pp 311–316
28. Gebhart B, Pera L (1970) Mixed convection from long horizontal cylinders. *J Fluid Mech* 45:49–64
29. Gebhart B, Audunson T, Pera L (1970) Forced, mixed and natural convection from long horizontal wires, experiments at various Prandtl numbers. In: *Papers presented at the 4th international heat transfer conference*, paper NC 3.2, Paris, France
30. Hatton A, James D, Swire H (1970) Combined forced and natural convection with low-speed air flow over horizontal cylinders. *J Fluid Mech* 42:17–31
31. Hermann R (1936) Wärmeübergang bei freier Strömung am waagrecchten Zylinder in zwei-atomigen Gasen. *Ver Deut Ing Forschungsh* 379
32. Jakob M, Linke W (1935) Der Wärmeübergang beim Verdampfen von Flüssigkeiten an senkrechten und waagerechten Flächen. *Phys Z* 36:267–280
33. Jodlbauer K (1933) Das Temperatur- und Geschwindigkeitsfeld um ein geheiztes Rohr bei freier Konvektion. *Fors* 4:157–172
34. Kays W, Bjorklund I (1958) Heat transfer from a rotating cylinder with and without crossflow. *Trans ASME* 80:70–78
35. Kennelly A, Wright C, Bylevelt JV (1909) The convection of heat from small copper wires. *Trans Amer Inst Elec Eng* 28:363–393
36. King W (1932) The basic laws and data of heat transmission. *Mech Eng* 54:347–353, 426:410–414
37. Koch W (1927) Über die Wärmeabgabe geheizter Rohre bei verschiedener Neigung der Rohrachse. *Gesundh Ing Beih* 1:1–29
38. Kuehn T, Goldstein R (1976) Correlating equations for natural convection heat transfer between horizontal circular cylinders. *Int J Heat Mass Transf* 19:1127–1134
39. Kuehn T, Goldstein R (1980) Numerical solution to the Navier-Stokes equations for laminar natural convection about a horizontal isothermal circular cylinder. *Int J Heat Mass Transf* 23:971–979
40. Kyte JR, Madden AJ, Piret EL (1953) Natural-convection heat transfer at reduced pressure. *Chem Eng Prog* 49:653–662
41. Lander C (1942) A review of recent progress in heat transfer. *J Inst Mech Eng* 148:81–112
42. Langmuir I (1912) The convection and conduction of heat in gases. *Trans Am Inst Electr Eng* 31:1229–1240
43. Lemlich R (1955) Effect of vibration on natural convective heat transfer. *Ind Eng Chem* 47:1175–1180
44. Lemlich R, Rao M (1965) The effect of transverse vibration on free convection from a horizontal cylinder. *Int J Heat Mass Transf* 8:27–33
45. Li KW, Parker JD (1967) Acoustical effects on free convective heat transfer from a horizontal wire. *J Heat Transf* 89:277–278

46. Mabuchi I, Tanaka T (1967–1968) Experimental study on effect of vibration on natural convective heat transfer from a horizontal fine wire. *Sci Rep Res Inst Tohaku Univ Ser B* 19:205–219
47. Martinelli R, Boelter L (1938) The effect of vibration on heat transfer by free convection from a horizontal cylinder. In: *Proceedings of the international congress of applied mechanics*
48. Mason W, Boelter L (1940) Vibration-it's effect on heat transfer. *Power Plant Eng* 44:43–44
49. McAdams W (1954) *Heat transmission*. Mc-Graw-Hill, New York
50. Merkin J (1977) Free convection boundary layers on cylinders of elliptic cross section. *ASME J Heat Transf* 99:453–457
51. Morgan V (1975) The overall convective heat transfer from smooth circular cylinders. *Adv Heat Transf* 11:199–264
52. Nakai S, Okazaki T (1975) Heat transfer form a horizontal circular wire at small Reynolds and Grashof numbers-I. *Int J Heat Mass Transf* 18:387–396
53. Nelson R (1924) Free convection heat in liquids. *Phys Rev* 23:94–103
54. Nusselt W (1929) Die Wärmeübergabe eines waagrecht liegenden Drahtes oder Rohres in Flüssigkeiten und gasen. *Ver Deut Ing* 73:1475–1478
55. Penney WR, Jefferson TB (1966) Heat transfer from an oscillating horizontal wire to water and ethylene glycol. *J Heat Transf* 88:359–366
56. Petavel J (1898) On the heat dissipated by a platinum surface at high temperatures. *Philos T R Soc A* 191:501–524
57. Petavel J (1901) On the heat dissipated by a platinum surface at high temperatures. Part iv. Thermal emissivity in high-pressure gases. *Philos T R Soc A* 197:229–254
58. Qureshi Z, Ahmad R (1987) Natural convection from a uniform heat flux horizontal cylinder at moderate Rayleigh numbers. *Numer Heat Transf* 11:199–212
59. Rebrov A (1961) Heat transfer with free motion about a horizontal cylinder in air. *Inzh-Fiz Zh* 4:32–39
60. Rice C (1923) Free and forced convection of heat in gases and liquids. *Trans Am Inst Electr Eng* 42:653–701
61. Rice C (1924) Free convection of heat in gases and liquids-ii. *Trans Am Inst Electr Eng* 43:131–144
62. Saitoh T, Sajiki T, Maruhara K (1993) Bench mark solutions to natural convection heat transfer problem around a horizontal circular cylinder. *Int J Heat Mass Transf* 36:1251–1259
63. Saville D, Churchill S (1967) Laminar free convection in boundary layers near horizontal cylinders and vertical axisymmetric bodies. *J Fluid Mech* 29:391–399
64. Schurig O, Frick C (1930) Heat and current-carrying capacity of bare conductors for outdoor service. *Gen Electr Rev* 33:141–157
65. Senftleben H (1951) Die Wärmeabgabe von Körpern verschiedener Form in Flüssigkeiten und Gasen bei freier Strömung. *Z Angew Phys* 3:361–373
66. Tsubouchi T, Sato S (1960) Heat transfer from fine wires and particles by natural convection. *Chem Eng Prog Symp Ser* 56:269–284
67. Tsubouchi T, Masuda H (1966–1967) Natural convection heat transfer from a horizontal circular cylinder with small rectangular grooves. *Sci Rep Res Inst Tohaku Univ Ser B* 18:211–242
68. van der Hegge Zijnen B (1956–1957) Modified correlation formulae for the heat transfer by forced convection from horizontal cylinders. *Appl Sci Res* 6:129–140
69. Wamsler F (1911) Die Wärmeabgabe geheizter Körper an Luft. *Ver Deut Ing Forschunash* 98/99
70. Wang P, Kahawita R, Nguyen T (1990) Numerical computation of the natural convection flow about a horizontal cylinder using splines. *Numer Heat Transf* 17:191–215
71. Weder E (1968) Messung des gleichzeitigen Wärme- und stoffübergangs am horizontalen Zylinder bei freier Konvektion. *Wärme Stoffübergangs* 1:10–14
72. Wilks G (1972) External natural convection about two-dimensional bodies with constant heat flux. *Int J Heat Mass Transf* 15:351–354
73. Zhukauskas AA, Shlancyauskas A, Yaronis E (1961) Effect of ultrasonic waves on heat transfer of bodies in liquids. *Inzh-Fiz Zh* 4:58–62

Natural Convection from Circular Cylinders

Boetcher, S.

2014, X, 48 p. 4 illus., Softcover

ISBN: 978-3-319-08131-1