

# Relevance of Deep-Subsurface Microbiology for Underground Gas Storage and Geothermal Energy Production

**Claudia Gniese, Petra Bombach, Jana Rakoczy, Nils Hoth, Michael Schlömann, Hans-Hermann Richnow and Martin Krüger**

**Abstract** This chapter gives the reader an introduction into the microbiology of deep geological systems with a special focus on potential geobiotechnological applications and respective risk assessments. It has been known for decades that microbial activity is responsible for the degradation or conversion of hydrocarbons in oil, gas, and coal reservoirs. These processes occur in the absence of oxygen, a typical characteristic of such deep ecosystems. The understanding of the responsible microbial processes and their environmental regulation is not only of great scientific interest. It also has substantial economic and social relevance, inasmuch as these processes directly or indirectly affect the quantity and quality of the stored

---

C. Gniese · M. Schlömann

TU Bergakademie Freiberg, Institute of Biosciences, Leipziger Str. 29,  
09599 Freiberg, Germany

e-mail: claudia.gniese@ioez.tu-freiberg.de

M. Schlömann

e-mail: michael.schloemann@ioez.tu-freiberg.de

P. Bombach · H.-H. Richnow

Department of Isotope Biogeochemistry,  
Helmholtz Centre for Environmental Research-UFZ,  
Permoserstr. 15, 04318 Leipzig, Germany

e-mail: petra.bombach@ufz.de

H.-H. Richnow

e-mail: hans.richnow@ufz.de

J. Rakoczy · M. Krüger (✉)

Federal Institute for Geosciences and Natural Resources-BGR, Stilleweg 2,  
30655 Hannover, Germany

e-mail: martin.krueger@bgr.de

N. Hoth

TU Bergakademie Freiberg, Institute of Mining, Gustav-Zeuner-Str. 1A,  
09599 Freiberg, Germany

e-mail: nils.hoth@tu-freiberg.de

oil or gas. As outlined in the following chapter, in addition to the conventional hydrocarbons, new interest in such deep subsurface systems is rising for different technological developments. These are introduced together with related geomicrobiological topics. The capture and long-term storage of large amounts of carbon dioxide, carbon capture and storage (CCS), for example, in depleted oil and gas reservoirs, is considered to be an important option to mitigate greenhouse gas emissions and global warming. On the other hand, the increasing contribution of energy from natural and renewable sources, such as wind, solar, geothermal energy, or biogas production leads to an increasing interest in underground storage of renewable energies. Energy carriers, that is, biogas, methane, or hydrogen, are often produced in a nonconstant manner and renewable energy may be produced at some distance from the place where it is needed. Therefore, storing the energy after its conversion to methane or hydrogen in porous reservoirs or salt caverns is extensively discussed. All these developments create new research fields and challenges for microbiologists and geobiotechnologists. As a basis for respective future work, we introduce the three major topics, that is, CCS, underground storage of gases from renewable energy production, and the production of geothermal energy, and summarize the current state of knowledge about related geomicrobiological and geobiotechnological aspects in this chapter. Finally, recommendations are made for future research.

**Keywords** CCS • Deep biosphere • Geothermal energy • Hydrocarbon reservoir • Renewable energy • Underground gas storage

## Abbreviations

16S rRNA	Ribosomal RNA of a sedimentation rate of 16 Svedberg
AOM	Anaerobic oxidation of methane
bbl	Barrel (oil)
CARD-FISH	Catalyzed reporter deposition-Fluorescence in situ hybridisation
CCS	Carbon capture and storage
cDNA	Complementary DNA
CLEAN	CO <sub>2</sub> large-scale enhanced gas recovery in the Altmark Natural Gas Field
CO <sub>2</sub> CRC	Cooperative Research Centre for Greenhouse Gas Technologies
COE	Cost of electricity
CO <sub>2</sub> -EGR	EGR using CO <sub>2</sub>
CO <sub>2</sub> -EOR	EOR using CO <sub>2</sub>
CO <sub>2</sub> MAN	CO <sub>2</sub> -reservoir management
CO <sub>2</sub> SINK	CO <sub>2</sub> Storage by injection into a saline aquifer at Ketzin
DAPI	4',6-Diamidin-2-phenylindol
DGGE	Denaturing gradient gel electrophoresis
DNA	Deoxyribonucleic acid
DOC	Dissolved organic carbon
<i>dsrAB</i>	Dissimilatory (bi)sulfite reductase gene

EDTA	Ethylenediaminetetraacetic acid
ECBM	Enhanced coal bed mining
EGR	Enhanced gas recovery
EOR	Enhanced oil recovery
EPS	Extracellular polymeric substances
FISH	Fluorescence in situ hybridization
HFC	Hydrofluorocarbons
IEAGHG	International Energy Agency Greenhouse Gas
<i>mcr</i>	Methyl coenzyme M reductase gene
MEOR	Microbial enhanced oil recovery
MIC	Microbially influenced corrosion
MPN	Most probable number
mRNA	Messenger RNA
OIP	Oil in place
<i>P</i>	Pressure
PAH	Polycyclic aromatic hydrocarbons
PFC	Perfluorocarbons
PCR	Polymerase chain reaction
PDS	Bottom-hole positive displacement sampler
PLFA	Phospholipid-derived fatty acids
qPCR	Quantitative polymerase chain reaction
RECOBIO	Recycling of sequestered CO <sub>2</sub> by deep subsurface microbial-biogeochemical transformation, RECOBIO-1 and RECOBIO-2 are two successive projects
RNA	Ribonucleic acid
RT-qPCR	Reverse transcription-quantitative PCR
SAC	Surface active compound
SC-CO <sub>2</sub>	Supercritical carbon dioxide
SIP	Stable isotope probing
SSCP	Single-strand conformation polymorphism
TOC	Total organic carbon
T-RFLP	Terminal restriction fragment length polymorphism
UGS	Underground gas storage
<i>V</i>	Volume

## Contents

1	Carbon Capture and Storage (CCS) .....	98
1.1	Introduction to Carbon Capture and Storage.....	98
1.2	Geochemical Effects and Risks of CO <sub>2</sub> in Storage Sites .....	100
1.3	Microbial Populations in Potential CO <sub>2</sub> Storage Sites.....	102
1.4	Conclusion and Perspectives .....	107

2	Underground Gas Storage (Methane, Hydrogen) for Energy Generation.....	108
2.1	Introduction to Underground Gas Storage.....	108
2.2	Microbiology of Gas Storage Sites.....	109
2.3	Implications and Future Perspectives .....	112
3	Geothermal Energy Production.....	112
3.1	Geothermal Energy .....	112
3.2	Geothermal Energy and its Effects on Subsurface Microbiology .....	113
3.3	Further Research.....	116
	References.....	116

## 1 Carbon Capture and Storage (CCS)

### 1.1 Introduction to Carbon Capture and Storage

Mitigation of greenhouse gas emissions without interference with economic growth is the main concern of climate-change initiatives to prevent global warming. Unfortunately, observations of a 100-year period between 1906 and 2005 already show an increase of the global temperature of  $0.74 \pm 0.18$  °C. Changes in climate are noticeable and include extreme weather such as droughts, heavy precipitation, heat waves, and intensity of tropical cyclones [45].

CO<sub>2</sub> is the principal component of the greenhouse gases in addition to CH<sub>4</sub>, N<sub>2</sub>O, hydrofluorocarbons (HFC), perfluorocarbons (PFC), and SF<sub>6</sub> (Kyoto Protocol, 1998). Power generation using fossil fuels or biomass, cement production, and other CO<sub>2</sub>-emitting industries are the main sources of CO<sub>2</sub>. This gas accounts for 64 % of the enhanced “greenhouse effect” [15, 44]. Therefore, removing CO<sub>2</sub> from flue gases would help to maintain the global temperature rise to a maximum of 2 °C.

In this respect, carbon capture and storage (CCS) can be a promising and fast approach to reduce CO<sub>2</sub> emission to the atmosphere. But this approach is limited by availability and capacity of CO<sub>2</sub> storage sites. Despite this limitation, CCS can be a bridging technology that provides a gain in time until an energy supply with renewable energies is secured. Moreover, storage of CO<sub>2</sub> in deep geological formations probably results in natural gas restoration in geological timescales provided that CO<sub>2</sub> is transformed microbiologically to CH<sub>4</sub>.

In the special report of the Intergovernmental Panel on Climate Change on carbon dioxide capture and storage [44], CCS is defined as “[...] a process consisting of the separation of CO<sub>2</sub> from industrial and energy-related sources, transport to a storage location and long-term isolation from the atmosphere.” A detailed description of the CCS technology is given in this special report. In brief, there are three main strategies to capture CO<sub>2</sub> from flue gases: (i) postcombustion, (ii) precombustion, and (iii) oxy-fuel combustion [44]. In the postcombustion process, chemical sorbents are used to recover up to 95 % CO<sub>2</sub> from the flue gas, which contains mainly N<sub>2</sub> and 3–15 vol % CO<sub>2</sub>. In the precombustion process, the fuel is first burned with oxygen,

air, and/or steam to generate CO and H<sub>2</sub>. Then CO is converted to CO<sub>2</sub> by the addition of steam and finally CO<sub>2</sub> is captured using absorption–desorption methods. In the oxy–fuel combustion process, the combustion of the fuel is carried out by using oxygen, either pure or mixed with a CO<sub>2</sub>-rich recycled flue gas, and results in flue gas of up to 98 % CO<sub>2</sub>. After CO<sub>2</sub> is enriched from the original flue gas by using one of these capturing strategies, the gas is pressurized for the transport to CO<sub>2</sub> storage sites via pipelines or trucks. The CO<sub>2</sub> capture process accounts for an increase of 20–90 % cost of electricity (COE) depending on the type of power plant [44]. Further technological developments may reduce the extra costs in the future. The sequestration of the original flue gas would cause much higher costs.

There are research and industrial projects worldwide that investigate CCS on laboratory and field scales (pilot/demonstration plants) and perform EGR (enhanced gas recovery), EOR (enhanced oil recovery), or ECBM (enhanced coal bed mining) connected to CO<sub>2</sub> storage. The IEAGHG [43] operates a database that lists all research, development, and demonstration (RD&D) projects concerning CCS. Among them, there are projects that store CO<sub>2</sub> in saline aquifers, for example, the Frio Brine Pilot Test (USA) and CO<sub>2</sub>SINK (Ketzin, Germany) projects, which store CO<sub>2</sub> in gas fields, for example, the In Salah Gas project (Algeria) and CO<sub>2</sub>CRC Otway Basin project (Australia), and EOR projects, for example, Weyburn CO<sub>2</sub>-EOR (Canada). In addition, a CO<sub>2</sub>-EGR approach was planned for the gas field Altmark (CLEAN project, Germany). The almost depleted gas field Altmark is the second-largest onshore gas field in Europe and would be of great importance for CO<sub>2</sub> storage if CCS is accepted by the German government and society. In addition to research and development in CCS technology, industry and scientists have to include good public relations in their field of duty. In particular in populated regions where CCS in deep geological formations is possible, residents must regularly be informed about the process, the safety, and the risk management of the CO<sub>2</sub> storage site.


Disposal of CO<sub>2</sub> in the ocean and usage of CO<sub>2</sub> for chemical processes are also approaches to reduce emissions of CO<sub>2</sub>. But the most promising approach is the injection of supercritical CO<sub>2</sub> (SC-CO<sub>2</sub>) into deep geological formations, that is, depleted oil and gas reservoirs, saline aquifers, or into unminable coal beds. In general, geological formations have to fulfill two main requirements to be suitable for long-term CO<sub>2</sub> storage. First, the storage reservoir has to consist of a porous and permeable rock, often sandstone, into which the CO<sub>2</sub> can be injected. Second, there has to be an impermeable cap rock and a succession of further seals up to the surface (multibarrier system). Typical cap rocks and seals consist of mudstone, siltstone, or salts (e.g., anhydrite). In particular, natural gas reservoirs have been demonstrated to be gas tight at least concerning CH<sub>4</sub> for geological timescales. Therefore, CO<sub>2</sub> storage in depleted gas fields is favored. These storage sites can be operated up to a site-specific pressure level, which should remain below the initial pressure level of the reservoir.

The worldwide storage potential has been estimated to be at least 200 Gt CO<sub>2</sub>, and might even reach 2,000 Gt CO<sub>2</sub> in sedimentary basins (e.g., oil and gas reservoirs) [44]. For Germany, a summary of the distribution and the storage

potential of sedimentary basins has been provided by May et al. [63]. There are three main geological structures, which represent potential CO<sub>2</sub> storage reservoirs in Germany. These reservoirs comprise sandstones rich in (i) feldspar, carbonate, and clay; (ii) iron minerals; or (iii) organic material. The formation waters are often highly saline (up to 300 g/l) and consist of high ammonia content (up to 3,000 ppm). With depth, the brines are increasingly reductive, their content of dissolved metal ions (e.g., iron) increases, whereas the content of sulfate decreases. Aside from these chemical conditions, the deep biosphere, which is likely to be present in such geological formations, has to be adapted to high temperatures, high pressure, and a low supply of electron acceptors, electron donors, or other nutrients.


## 1.2 Geochemical Effects and Risks of CO<sub>2</sub> in Storage Sites

The CO<sub>2</sub> gas designated for storage can be accompanied by impurities such as SO<sub>x</sub>, NO<sub>x</sub>, CO, H<sub>2</sub>S, NH<sub>3</sub>, O<sub>2</sub>, condensable water, and hydrocarbons [87]. Therefore, the potential impact of the impurities on the storage site and storage process has to be considered. According to Knauss et al. [51], co-contaminant H<sub>2</sub>S showed only minor effects on water–rock interaction, but SO<sub>2</sub> leads to a drastic drop of pH, which will lower the formation of carbonates. However, sequestration of CO<sub>2</sub>–SO<sub>2</sub> mixtures into storage sites that contain hematite (Fe<sub>2</sub>O<sub>3</sub>, red beds) has been reported to result in dissolution of hematite and the release of ferrous iron induced by SO<sub>2</sub> [77]. This iron release will promote the formation of siderite (FeCO<sub>3</sub>), which can cause an increase in the storage capacity of the reservoir, but can also provoke a negative effect on the storage unit by lowering its permeability:



Once CO<sub>2</sub> is injected into the storage reservoir, the gas can be trapped by four mechanisms [38, 77, 78]:

- (i) Hydrodynamic trapping: SC–CO<sub>2</sub> is trapped below a cap rock of a depleted gas or oil field. This can be connected to enhanced gas or oil recovery (EGR, EOR), respectively.
- (ii) Residual trapping: CO<sub>2</sub> is trapped by capillary forces in the pores of the reservoir rocks.
- (iii) Solubility trapping/solution trapping: CO<sub>2</sub> is dissolved in formation water as H<sub>2</sub>CO<sub>3</sub>, HCO<sub>3</sub><sup>−</sup>, and other aqueous species.
- (iv) Mineral trapping: CO<sub>2</sub> is trapped as carbonate mineral (calcite, magnesite, siderite, and dawsonite) in deep saline formations. In this respect, silicate minerals are essential because their alteration enhances these mineral trapping processes due to the supply of cations.

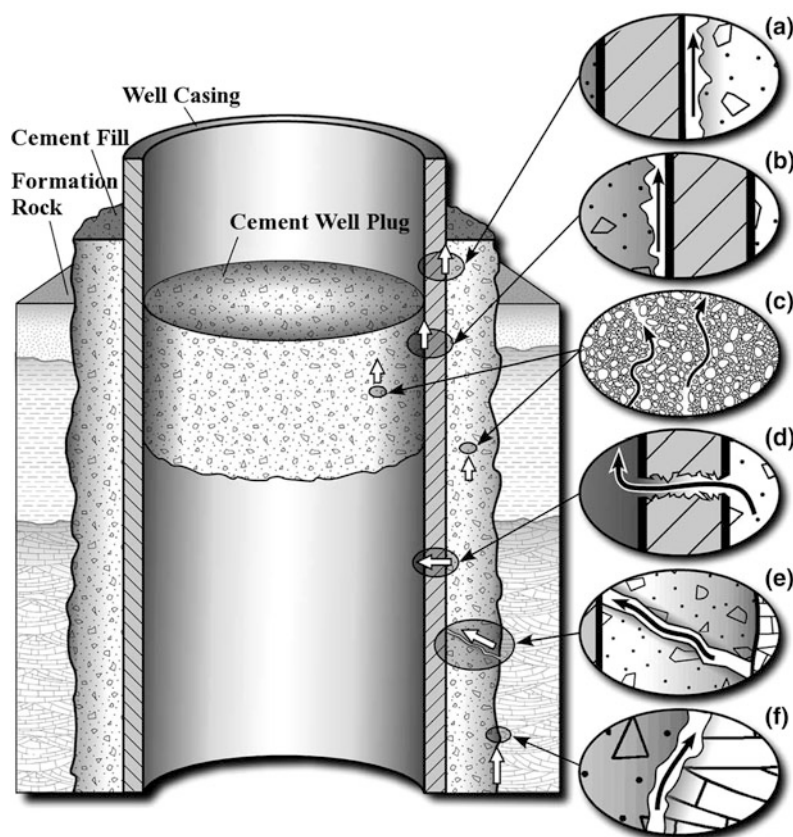

**Fig. 1** Schematic illustration of possible leakage pathways through an abandoned well. **a** Between casing and cement; **b** between cement plug and casing; **c** through the cement porespace as a result of cement degradation; **d** through casing as a result of corrosion; **e** through fractures in cement; and **f** between cement and rock (from [33], with kind permission from Springer Science and Business Media: [33], Fig. 1, Copyright Springer-Verlag 2004)

Another trapping mechanism can be the absorption of  $\text{CO}_2$  by coal, which could lead to a release of methane and is used in enhanced coal bed methane recovery.

It has to be considered that  $\text{CO}_2$  differs from other gases with respect to its solubility, penetration, and reaction behavior. The permeability and penetration behavior of the cap rock is also a crucial aspect for the safety and integrity of the  $\text{CO}_2$  storage site. One possible risk could be leakage of  $\text{CO}_2$  via undetected fractures and faults and via abandoned wells or failure during the injection process [44]. However,  $\text{CO}_2$  exhibits a very good solubility (in contrast to  $\text{CH}_4$  and especially to  $\text{H}_2$ ) and will be trapped in any overlying formation water if it leaks

vertically through one sealing unit. Leakage through anthropogenic artificial barriers (cement, casing) may occur because of fatigue or alteration of the well bore material due to chemical attack of highly corrosive SC-CO<sub>2</sub> or high pressure (Fig. 1 [33]).

Another risk, especially for CO<sub>2</sub> storage in saline aquifers, could be contamination of overlying groundwater with brines. The saline formation water could be displaced upward due to a spacious pressure build-up. In this case, the pressure of the storage formation would drop, could be detected with monitoring equipment, and an emergency plan could be applied. In general, monitoring strategies have to be operated before, during, and after CO<sub>2</sub> sequestration to assess the baseline conditions, to follow the storage process and detect process failure, and to control long-term reactions and failure, respectively. The migration of CO<sub>2</sub> in the storage formation and the composition of the overlying groundwater and surface soils of the storage site have to be controlled. In addition to geochemical reactions, also biogeochemical reactions, that is, mineral–brine–CO<sub>2</sub>–microbe interactions have to be considered.

### ***1.3 Microbial Populations in Potential CO<sub>2</sub> Storage Sites***

Geological formations known to be suitable for CCS comprise a deep subsurface biosphere, which is dominated by sulfate-reducing, iron-reducing, acetogenic, and methanogenic microorganisms [60]. Microbial corrosion of tubing and cement of well bores and souring of gas due to H<sub>2</sub>S production by sulfate reducers are well-known problems of gas and oil industry [21, 34, 50]. In addition, clogging of well bores and porespace of the geological formation can arise when H<sub>2</sub>S precipitates in the presence of ferrous iron first to FeS and then to FeS<sub>2</sub>. These technological problems clarify the need to consider biogeochemical reactions in addition to geochemical reactions, although microbiologically mediated processes in the deep subsurface are rather slow compared to microbial activities at the surface [17, 60].

Microbial reactions can have favorable and unfavorable effects on the capacity, integrity, and safety of CO<sub>2</sub> storage sites. Therefore, baseline monitoring of each CCS operation should include the detection of the initial microbial community to deduce possible microbial reactions in advance. In particular, a microbial assemblage as biofilm on mineral surfaces can either inhibit or enhance mineral dissolution [64]. Dissolution of minerals can decrease the storage capacity of the reservoir and could additionally lead to exposure of fractures, which possibly form connections to higher layers of the formation and affect the storage integrity. But dissolution of minerals can also provide microorganisms with, for example, electron acceptors. Biofilms can serve as protective coating of minerals decreasing mineral dissolution and presenting nucleation sites to catalyze carbonate precipitation [23]. On the surface of silica-based minerals, for example, the formation of amorphous silica gels, whose crosslinking is facilitated in the presence of biomolecules, can lead to a self-sealing effect of microfissures and porespace of



disturbed claystone and cements [36, 49]. Hence, self-sealing and enhanced carbonate formation may contribute significantly to integrity and safety of the storage site and additionally stabilize the injected  $\text{CO}_2$  into solid carbonates [64]. Another indirect way to favor carbonation can be the adjustment of physicochemical conditions (e.g., increase of pH) due to metabolic activity in the deep subsurface.

The injection of  $\text{CO}_2$  into potential storage formations causes changes in reservoir temperature and pressure, and also leads to considerably higher  $\text{CO}_2$  concentrations. All variations in the physicochemical conditions will stress the indigenous biosphere of the storage formation. Beyond that, a sterilization can take place at the center of the  $\text{CO}_2$  injection well. However, Mitchell et al. [66, 67] have demonstrated that the resilience of biofilms to SC- $\text{CO}_2$  is higher than that of planktonic microorganisms.

Microbial monitoring before and during  $\text{CO}_2$  injection into a saline aquifer near Ketzin (Germany) has revealed that the microorganisms adapted within five months to higher  $\text{CO}_2$  concentrations and were even more metabolically active [70]. Furthermore, during the propagation of  $\text{CO}_2$  in the storage reservoir,  $\text{CO}_2$  will form a plume that develops a gradient of  $\text{CO}_2$  concentrations. Thus, regions with lower  $\text{CO}_2$  content can directly provide autotrophic microorganisms with their carbon source and an electron acceptor. Heterotrophic microorganisms probably metabolize organic compounds (e.g., organic acids, methylalkanes) that were mobilized by SC- $\text{CO}_2$  from the sandstone of the storage formation [85]. Hence, CCS can even stimulate microbial growth.

The consumption of  $\text{CO}_2$  due to microbial activity has reproducibly been shown to be connected to a considerable increase in the formation of TOC (total organic carbon) in experiments with a bioreactor and a sterile control reactor under elevated  $\text{H}_2$  and  $\text{CO}_2$  partial pressure [26]. The experiments have been performed with milled material of a drilling core, which originated from the gas field Schneeren-Husum (Germany), and formation water collected at well heads of well bores of this gasfield. Therefore, microbial transformation of  $\text{CO}_2$  into biomass and organic compounds can additionally contribute to the storage capacity of a reservoir.

One problem that may result from the stimulation of, in particular, sulfate-reducing microorganisms is the increase in  $\text{H}_2\text{S}$  production, which in turn can affect the integrity of well bores and storage equipment via biocorrosion.

Methanogenic microorganisms form another microbial group to be considered, which would transform injected  $\text{CO}_2$  either directly (autotrophically) or indirectly (acetoclastically) to  $\text{CH}_4$ . Although  $\text{CH}_4$  represents a far more potent greenhouse gas than  $\text{CO}_2$  if it would leak from the reservoir,  $\text{CH}_4$  can possibly be used as an energy source in geological timescales.

So far, the extent of the microbial impact on CCS on short-term and long-term scales remains to be clarified. Even if no viable microorganism survives the  $\text{CO}_2$  injection, there would be biological residues such as endospores, organic clusters, enzymes, or lysed cells that can have an influence on the  $\text{CO}_2$  storage performance [62, 64]. There are many biogeochemical processes in the deep subsurface that are not yet understood or have even been subjected to investigation. In this respect,

one challenge is to obtain reliable samples of the deep subsurface biosphere. Then, other challenging aspects are the very low doubling times of these microorganisms and the creation of their physicochemical requirements for cultivation. Despite these aspects, only a small number of CCS projects to date consider biogeochemical processes [17].

In some projects, which store CO<sub>2</sub> in hydrocarbon reservoirs, microbial monitoring of surface soil (total cell counts, In Salah Gas project; Algeria [47]) or microbial mats above the storage reservoir (microbial community composition and total cell counts, Sleipner project (Norway [98]) has been performed to survey possible CO<sub>2</sub> leakage. In contrast, formation waters of the Paaratte formation have been sampled in situ at 1,400 m depth (60 °C, 13.8 MPa) for 16S rRNA gene analyses in the framework of the CO<sub>2</sub>CRC Otway Basin project (Australia). Bacterial sequences of the reservoir community have been related to the genera *Thermicola*, *Acinetobacter*, *Sphingobium*, and *Dechloromonas* [72]. Microorganisms, stained with the DNA-specific dye DAPI, have been reported to be microscopically visible mainly as filamentous cells of 5–45 µm length. The injection of a gas mixture of 75.4 mol % CO<sub>2</sub> and 20.5 mol % CH<sub>4</sub> to the Paaratte formation started in 2008 [13].

Detailed microbial analyses have been performed for formation fluids of the almost depleted natural gas reservoir Altmark (Permian—Upper Rotliegend, Germany). This gas reservoir comprises extreme environmental conditions, for example, in situ temperatures of 110 °C up to 130 °C and high salinity brines of >300 g salts per liter.

The hydraulic isolated subfield block “Altensalzwedel” has been considered for EGR and storage of 100,000 t CO<sub>2</sub> in 3,000 m depth (Fig. 2). Although injection of CO<sub>2</sub> in the Altmark gasfield was not possible due to political obstacles and public opposition, a comprehensive reservoir monitoring, which includes 16S rRNA gene analyses and cell quantification of the deep subsurface biosphere, has been performed during the CLEAN project [56].

Formation fluids of three different well bores of the subfield block “Altensalzwedel” (S10, S13, S17) have been sampled in situ using a double-ball lining sampler. Analyses of bacterial 16S rRNA genes of these fluids have revealed that the microorganisms at the site are related to hydrogenotrophic bacteria of *Hydrogenophaga* sp., *Acidovorax* sp., *Ralstonia* sp., and *Pseudomonas* sp. and to representatives from saline, hot, anoxic, and deep environments [69]. In addition, relatives of *Diaphorobacter* sp., a thiosulfate-oxidizing bacterium, were present in the formation fluid of one well bore (S17), and an uncultured biocorrosive thermophilic bacterium has been detected in fluids of two well bores (S13, S17). The formation fluids of one well bore (S10) have also been sampled with a bottom-hole positive displacement sampler (PDS). This sampling device can be inserted sterile and closed into the well bore, can be opened in the depth to collect the formation water in situ, and closed again to be moved out. In contrast, the double-ball lining is a more open system for in situ sampling. However, the two different sampling procedures have principally revealed the same microbial community structure in the formation water of well bore S10. In addition to the microorganisms, which



**Fig. 2** Subfield blocks of the Altmark gasfield as indicated by grey shades (modified after [31]). \*Three subfield blocks, which have been the focus of the RECOBIO-2 project. \*\*One subfield block, which has been the focus of the CLEAN project

have also been found in the formation water sampled with the double-ball lining sampler, additional 16S rRNA gene sequences similar to dissimilatory metal-reducing bacteria (*Pantoea* sp. described by Francis et al. [32]), aromatic-degrading and metal-corroding bacteria of deep-sediment origin (*Sphingomonas* sp. [3, 99]), and extremophilic Fe(III)- and Mn(IV)-reducing bacteria (*Bacillus* sp. [12]) have been found in formation water sampled with the PDS [56]. Cell quantification using cell counting of SYBR Green-stained cells (mainly particle-associated cells) and quantitative PCR analyses have shown only very low cell numbers [69].

In the RECOBIO-2 project, the deep biosphere of three subfield blocks of the Altmark natural gasfield, surrounding the “Altensalzwedel” subfield block, has been investigated (Fig. 2) [42]. The formation waters of CLEAN and RECOBIO-2 sampling sites mainly differed in their concentration of sulfate, which was between 400–1,800 mg/l and almost no detectable sulfate, respectively.

Microscopic analyses using CARD-FISH and DAPI-stained cells also showed rather low cell numbers of at most  $10^5$  cells/ml in the formation water samples. There were only minor differences in the bacterial community composition in the formation water, which had been sampled at the well head (produced) and in situ (double-ball lining) of a well bore of the “Heidberg-Mellin” subfield block [35, 41]. The 16S rRNA gene sequences were similar to representatives of sulfate-reducing *Desulfotomaculum* sp., thiosulfate-reducing *Thermoanaerobacterium* sp.,

elemental sulfur-reducing and fermenting *Petrotoga* sp., and to uncultured bacteria found in, for example, geothermal water or petroleum reservoirs. A first 16S rRNA gene sequence analysis of the archaeal community of the formation water sample, which had been collected in situ, indicated the occurrence of members of hydrogenotrophic *Methanomicrobiales*.

The in situ-sampled formation water of a well bore of the “Salzwedel-Peckensen” subfield block was more diverse and comprised 16S rRNA gene sequences, which were assigned predominantly to uncultured bacteria detected in, for example, volcanic deposits, petroleum reservoirs, geothermal water, or hydrothermal vents. In addition, sequences have been affiliated with *Desulfotomaculum* sp., *Thermoanaerobacterium* sp., *Petrotoga* sp., and to *Delftia* sp. found in PAH-contaminated soils. Interestingly, *Desulfotomaculum* sp. has also been detected in the 16S rRNA sequence analysis of the living bacterial community of the same formation water sample [41].

Projects storing CO<sub>2</sub> in deep saline aquifers are, for example, Frio Brine Pilot Test (USA), CO<sub>2</sub>SINK and CO<sub>2</sub>MAN (Ketzin, Germany), Sleipner (Norway), and Nagaoka project (Japan). However, the deep subsurface biosphere has been considered only in CO<sub>2</sub>SINK and CO<sub>2</sub>MAN, two projects on the small-scale pilot CCS test site in Ketzin, Germany.

Since 2008, CO<sub>2</sub> has been injected (~60,000 t of mainly food-grade CO<sub>2</sub>) into a saline aquifer, which is located in the “Roskow-Ketzin” double anticline, at a depth of 630–650 m below surface [53]. The CO<sub>2</sub> plume reached the first of the two observation wells two weeks after the start of CO<sub>2</sub> injection. The drill mud was removed from the injection well and the two observation wells using a N<sub>2</sub> lift at each well.

For microbial analyses, formation water of the first observation well has been collected in situ using either a flow-through sampler or a double-ball lining before and after CO<sub>2</sub> injection and at the well head during the N<sub>2</sub> lift. The microbial community has been analyzed using 16S rRNA gene fingerprinting methods (PCR-SSCP, DGGE) and cell counting with FISH and DAPI staining [70, 71]. Predominant microorganisms could be detected independently of the sampling procedure, which indicates negligible contamination effects during sampling. The microbial community was dominated by anaerobic halophilic fermentative bacteria (*Halanaerobium* sp., *Halobacteroidaceae*) and sulfate-reducing bacteria (*Desulfohalobium* sp., *Desulfotomaculum* sp.). Other members of the bacterial community were affiliated with phenanthrene-degrading *Comamonas* sp., to *Empedobacter* sp. from petroleum-oil contaminated soil and to oil-degrading bacteria of *Bacteroidetes*. After CO<sub>2</sub> arrival at the observation well, chemolithotrophic microorganisms temporarily outcompeted chemoorganotrophic microorganisms.

Microscopic analyses revealed total cell numbers of  $2\text{--}6 \times 10^6$  and  $2\text{--}4 \times 10^6$  cells/ml of living microorganisms before N<sub>2</sub> lift and CO<sub>2</sub> injection in formation water of the first observation well [70]. After N<sub>2</sub> lift, there were hardly any microorganisms detectable, but after CO<sub>2</sub> injection, total cell numbers were again determined to be  $10^5$  cells/ml. Moreover, after five months of CO<sub>2</sub> injection, total cell numbers again reached  $2 \times 10^6$  cells/ml and comprised almost

exclusively living microorganisms. Representatives of *Alpha*-, *Beta*- and *Gammaproteobacteria*, sulfate-reducing bacteria (*Desulfovibrionales*, *Desulfotomaculum* cluster I, and other *Firmicutes*, *Desulfobacteraceae*), and methanogenic archaea were detected using specific probes via FISH analyses.

Sulfate-reducing bacteria were detected in formation water of the injection well and were shown to be responsible for a decrease in the sulfate concentration and an increase in iron sulfide formation, which caused a decrease in permeability of the injection well and could be removed by a N<sub>2</sub> lift [102].

In addition, samples of drilling cores were investigated in long-term laboratory experiments with synthetic brine (172.8 g/l NaCl, 0.62 g/l KCl, 8.0 g/l MgCl<sub>2</sub> \* 6H<sub>2</sub>O, 4.9 g/l CaCl<sub>2</sub> \* 2H<sub>2</sub>O) under in situ conditions (5.5 MPa and 40 °C) and high CO<sub>2</sub> partial pressure to detect indigenous microorganisms and to quantify microbial activity [97]. The microbial community of the sandstone has been affiliated with members of *Alphaproteobacteria* (*Rhizobium* sp., *Agrobacterium* sp.), *Betaproteobacteria* (*Burkholderia* sp., *Hydrogenophaga* sp.), and *Actinobacteria* (*Propionibacterium* sp.). Except for *Agrobacterium* sp. and *Hydrogenophaga* sp., all other bacteria survived the exposure to CO<sub>2</sub>. Sulfate-reducing bacteria and archaea were not detected in sandstone material. Mineral dissolution due to CO<sub>2</sub> exposure caused an increase in porosities during long-term experiments [96]. However, after 24 months, porosities again decreased due to precipitation [30].

## 1.4 Conclusion and Perspectives

Carbon capture and storage can be a fast-acting approach to mitigate CO<sub>2</sub> emissions and can provide a gain in time for the development of energy-efficient renewables. Hence, if all safety precautions were considered and a reasonable handling secured, CCS could contribute considerably to prevent climate change.

Enhanced gas and oil recovery using CO<sub>2</sub> or storage of natural gas are known, long-performed, and CCS-analogue approaches. Therefore, findings from these approaches can help to deduce geochemical and biogeochemical reactions in a CCS operation. Nevertheless, research on CCS depends on pilot and demonstration tests to gain detailed process knowledge.

An interdisciplinary approach combining geophysical, geochemical, and biogeochemical monitoring of the whole CCS operation (baseline, injection, long-term storage) will be required to understand complex processes in the storage site and to be able to react properly if any problems in operation occur. In this respect, determination of the baseline conditions, the original microbial community composition, and knowledge of process behavior are essential to predict and then prevent any failure in advance. For example, a decrease of injectivity has occurred as an immediate consequence of microbial activity and has been recovered with a N<sub>2</sub> lift at the CCS pilot plant near Ketzin (Germany). During the Frio Brine Pilot Test (USA), dissolved organic carbon (DOC) has increased by a factor of 100 from 1–5 to 500–600 mg/l after 20 days of CO<sub>2</sub> injection [48]. The organic carbon,

mainly formate, acetate, and toluene, can probably be extracted by SC-CO<sub>2</sub> from the rock of the geological formation, but can also be a result of microbiological metabolism generating biomass and organic compounds.

During the RECOBIO-1 project 2005–2008, Ehinger et al. [26] already showed that microbial activity can have an impact on the performance of CCS in depleted natural gas fields. However, only four CCS pilot plant projects considered the deep subsurface biosphere in their monitoring concept to date. These are CO<sub>2</sub>CRC Otway Basin project (Australia), CLEAN project (Altmark, Germany), and CO<sub>2</sub>SINK and CO<sub>2</sub>MAN projects (Ketzin, Germany). In the CO<sub>2</sub>SINK project, recovery of microbial cell numbers and microbial activity was shown after CO<sub>2</sub> injection into the subsurface saline aquifer near Ketzin.

In addition to the CLEAN project, the deep subsurface biosphere in formation waters of well bores around the subfield block, which was formerly considered for CO<sub>2</sub> injection in the natural gasfield Altmark, was investigated in the RECOBIO-2 project 2008–2011.

In general, besides sulfate-reducing, metal-reducing, fermenting, and biocorrosive bacteria, many uncultured microorganisms have been detected by molecular genetic analyses. Cultivation of microorganisms of the deep subsurface is challenging due to low cell numbers, low microbial activity after sampling and extreme physicochemical requirements. However, cultivation approaches are required, because successful enrichment, isolation, and description of so far unknown microorganisms will further improve knowledge of biogeochemical processes.

Carbon capture and storage provides not only a possible measure to promote climate protection, but also valuable insights into subsurface environments.

## **2 Underground Gas Storage (Methane, Hydrogen) for Energy Generation**

### ***2.1 Introduction to Underground Gas Storage***

The underground storage of natural gas has its origin in the beginning of the twentieth century when gas companies searched for a solution to balance out the seasonal fluctuation in the demand for gas used for space heating of buildings [16]. Currently, around 630 underground gas storage (UGS) facilities are in operation worldwide [29]. New interest in large-scale underground storage of energy has been sparked by the expanding renewable energy production worldwide. The increasing utilization of solar or wind sources [91, 92] leads to a high fluctuation in energy production, which can be adapted to the actual demand by using the electrical energy to form hydrogen or methane and subsequent storage of the gases. Large volumes of storage capacities are required for this issue, which most likely can be solved by underground storage [94].


Although underground gas storage has been standard for engineering for decades, the impact of microbial processes on underground gas storage has hardly been explored. An early example of the impact of microbial processes on underground gas storage is provided by an underground town-gas reservoir near Lobodice, Czech Republic, where conspicuous changes in the gas volume and composition have been observed during a seven-month period of gas storage in the 1980's. The gas volume decreased by 10–20 % in conjunction with an approximately 1.5-fold increase in the methane content and significant losses of hydrogen, carbon dioxide, and carbon monoxide. Cultivation of microbial communities present in the reservoir water and rocks revealed methanogenic archaea as drivers of the changes in stored town gas. Changes in the carbon-isotope signature of methane in the stored town gas supported the result [88]. As exemplified in this study, microorganisms living in the deep subsurface can have profound effects on underground gas storage with respect to gas loss and alteration of gas composition. The consequences of this gas alteration are discussed below in more detail.

## 2.2 Microbiology of Gas Storage Sites

Underground gas storage is performed in depleted gas or oil reservoirs, aquifers, and salt caverns. These reservoirs are characterized by temperatures above 35 °C with a temperature increase of ~3 °C per 100 m depth, high pressure (>7 MPa) [29], absence of oxygen, and high salinity. Microbial life is widespread in the crust of the earth and numerous mechanisms to deal with different environmental factors have evolved [79, 82]. Microorganisms have been isolated that withstand hydrostatic pressure of 100 MPa [90], salt concentrations of up to 300 g/l [76], or temperatures of 113 °C [10]. Therefore, UGS facilities cannot be considered simply as a geological formation with unique physicochemical characteristics, but need to be seen also as a microorganism habitat. Indeed, between  $10^3$ – $10^6$  microorganisms per ml reservoir water have been recorded in porous rock reservoirs [29, 46, 88] and microbial life has also been proven in salt formations [95]. Here the questions arise how microorganisms live in such habitats, which factors control the microbial activities, and how the microbial processes affect the underground gas storage.

Free water is vital for microbial life so that the residual reservoir water serves as habitat for microorganisms. Microbial life in deep geological storage systems, such as oil and gas reservoirs, is controlled by the reservoir temperature, salinity, abundance of essential inorganic nutrients, and appropriate energy resources [60]. The temperature is generally seen as the limiting factor for the presence of living microorganisms, while the other factors control the size and activity of the microbial populations [40, 61]. Despite the documented growth at 113 °C of the Archaeon *Pyrolobus fumarii* [10], in situ observations indicate that microbial activity in oligotrophic reservoirs is restricted to temperatures below 80–90 °C [100]. Microorganisms gain their energy from complex electron transfer processes involving the oxidation of organic and inorganic compounds and subsequent reduction of a



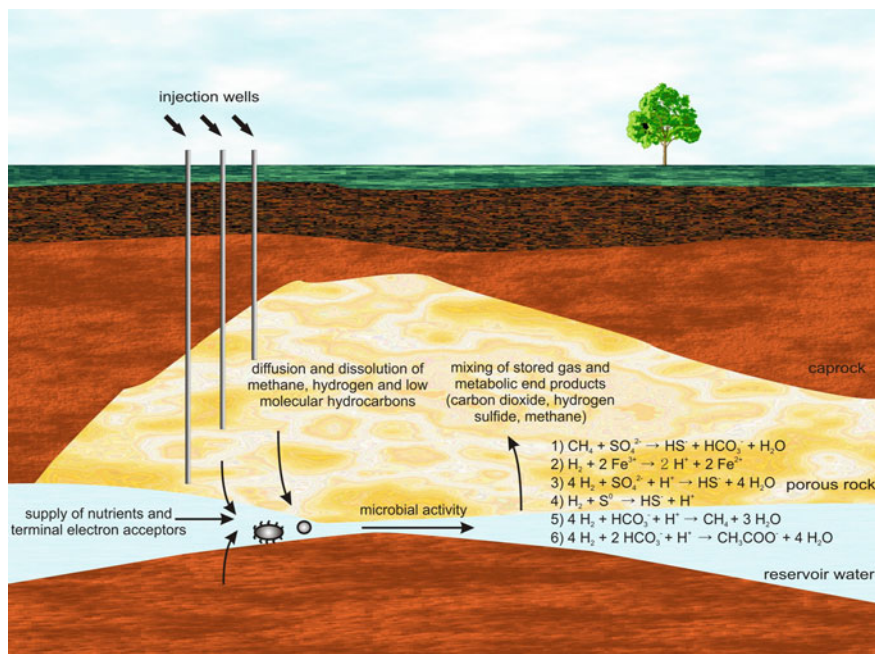

**Fig. 3** Scheme of possible microbially mediated processes in underground gas reservoirs. Stored gas diffuses in the reservoir and dissolves in residual water, where gas components such as methane and hydrogen can be consumed by microorganisms. Microorganisms derive nutrients such as phosphorous and nitrogen from mineral dissolution reactions, hydrolysis of dead cells, or from the nitrogen gas stored. Terminal electron acceptors are provided from marine evaporites, the mineral matrix, coal and shale layers, or also, in the case of carbon dioxide, from the stored gas itself. Volatile metabolic end products of microbial processes mix with the stored gas resulting in a change of the gas

terminal electron acceptor. The energy obtained is used for maintenance of microbial metabolism and growth [60]. Currently, methane and hydrogen are both considered as high-performance carriers of renewable energy, either directly produced in biogas plants or from the conversion of solar or wind energy. Both carriers will increasingly replace natural gas, which is a hydrocarbon mixture consisting primarily of methane and to a small extent of other low molecular hydrocarbons, carbon dioxide, nitrogen, and hydrogen sulfide [74] in both pipeline and storage systems. Hydrogen and methane as well as other low molecular hydrocarbons can serve as electron donors for microorganisms [40], so that the gas stored in a respective deep geological storage system provides sufficient energy sources for microbial activity (Fig. 3). Therefore, the depletion in essential inorganic nutrients, mainly phosphorous and nitrogen, and the availability of electron acceptors are considered as regulating factors for microbial activity. Suitable electron acceptors are ferric iron, manganese, sulfate, elemental sulfur, and carbon dioxide. Nitrate and nitrite are generally only present in low amounts [46, 60]. The electron acceptors are



provided from the embedded or overlying marine evaporates, the mineral matrix (e.g., ferric iron containing siderite), coal, and shale layers or in case of carbon dioxide also from the stored gas itself. Nitrogen is present as ammonium ions in the water, which can be transported by reservoir water movements or diffusion or it can be assimilated from the nitrogen gas by nitrogen-assimilating microorganisms. Phosphor is considered as the much more likely limiting nutrient [40], which is present organically or inorganically bound and is mobilized by hydrolysis of dead cells or microbial-induced weathering of minerals such as phosphate-containing silicates [8, 83].

Methane, and with regard to future storage concepts, also hydrogen can be regarded as the dominant energy sources for microorganisms affecting the long-term fate of these stored gases. Although the solubility of both gases in water decreases with increasing temperatures and salinity [20, 101], the elevated pressure has a far greater impact on the solubility resulting in high dissolved gas concentrations in the water phase [5]. At elevated gas partial pressure, an increase in microbial activities has been recorded, which is attributable to the high availability of gaseous substrates in the water phase [22, 24, 55, 75]. In principle, anaerobic oxidation of methane (AOM) can proceed with sulfate as the terminal electron acceptor. The process is believed to be mediated by a syntrophic consortium of methanotrophic archaea and sulfate-reducing bacteria ([52] and references therein) or by methanotrophic archaea alone [65]. Furthermore, there are indications that methane oxidation is coupled with the reduction of manganese and ferric iron [6]. Thus far there is no single study addressing the role of AOM in gas reservoirs so that we can only speculate about its role.

Hydrogen plays a central role as an energy source in subsurface anoxic environments and can be utilized by a wide range of bacteria and archaea ([68, 89] and references therein). Hydrogen oxidation in such environments can be coupled to the reduction of ferric iron, sulfate, elemental sulfur, or carbon dioxide [19, 89]. Ferric iron reduction results in iron mobilization because the highly water-insoluble Fe(III) is reduced to the much more soluble Fe(II) [59]. Reduction of sulfate or elemental sulfur is highly undesirable in UGS because the formed hydrogen sulfide creates a serious problem for the industry due to its toxicity to humans [81], deterioration in quality, odor, souring, and corrosion of steel material of the well-tubing [7, 73, 93]. Moreover, hydrogen sulfide reacts with ferrous iron to form iron sulfide, which precipitates and can cause clogging of the operation equipment. Microbial mediated formation of hydrogen sulfide has been found repeatedly in gas and oil reservoirs [34, 80] pointing to the impact of sulfate reduction in UGS facilities. When all other electron acceptors are depleted methanogenesis and/or homoacetogenesis will appear, which are less favorable processes from a thermodynamic point of view [18]. In the course of methanogenesis, hydrogen oxidation is coupled to the reduction of carbon dioxide under formation of methane, a process which is exclusively mediated by archaea. Alternatively, homoacetogenic bacteria catabolize hydrogen and carbon dioxide to acetate. Both processes are widespread in the deep subsurface [54] and have been observed in gas reservoirs [46, 88]. In addition to the particular importance of methane and

hydrogen as energy sources, microbial growth might also be stimulated by drilling fluids providing additional energy sources and nutrients as modeled by Baker [4]. This involves the risk of clogging of technical equipment by microbial biofilms or damage by microbial corrosion [11].

## ***2.3 Implications and Future Perspectives***

Overall, microbial activities lead to a loss of the stored gas, especially of hydrogen. Little is currently known about the extent. For example, in the course of methanogenesis, 4 mol hydrogen and 1 mol carbon dioxide are required to produce 1 mol methane and 3 mol water, which, for the operator of a UGS facility, means a substantial loss in the stored gas. Although the heating value of methane is with 35.9 MJ/m<sup>3</sup> higher than that of hydrogen (10.7 MJ/m<sup>3</sup>), methanogenesis also means a loss in calorific power.

One may speculate that the highest microbial activity occurs near the gas–water contact where a plentiful supply of electron donors is given, but high microbial activity also occurs at the mineral–water contact. From shallow aquifers, it is known that sessile bacteria contribute over 90 % of the total bacterial community and only less than 10 % exist in the planktonic lifestyle [2, 37, 39]. The first cultivation experiments with samples from an underground town gas reservoir showed a much higher activity of methanogenic archaea using water and rocks from the reservoir compared to the sole use of water [88].

To summarize, the major microbial-induced risks associated with underground gas storage are (i) loss of the gas and thereby calorific loss; (ii) damage of technical equipment by biocorrosion and clogging through precipitates and biomass; and (iii) risk to operational safety and deterioration in quality by hydrogen sulfide formation. Therefore, the understanding of microbial activities in the deep underground is crucial for an economically successful operation of UGS. Microbiological studies are required to shed light on the identity of indigenous bacteria, their metabolism and activity, and factors controlling the type of microbial processes. This should be done in close cooperation with UGS operators, hydrogeologists, geologists, and chemists ensuring a comprehensive understanding of the complex processes in the deep subsurface.

## **3 Geothermal Energy Production**

### ***3.1 Geothermal Energy***

Geothermal energy is the heat generated in the Earth. In geothermal plants, this energy is used as a source for heat supply ( $T > 60\text{ }^{\circ}\text{C}$ ) or to drive geothermal power plants ( $T > 120\text{ }^{\circ}\text{C}$ ).

The use of geothermal energy is generally subdivided into the operation in shallow depth (down to 400 m) and the operation in great depth (2,000–4,000 m). Shallow geothermal energy can be exploited principally worldwide and is often installed in private households for autonomous heat supply. Deep geothermal energy, on the other hand, is most efficient in regions where large temperature reservoirs exist ( $T > 100\text{ }^{\circ}\text{C}$ ), which are sufficient for electricity production. Worldwide, five countries use geothermal energy to produce around 20 % of their electricity (Costa Rica, El Salvador, Iceland, Kenya, and the Philippines) [9]. However, those are not the countries with the highest geothermal capacities. Even higher capacities are found in the United States of America (Table 1).

The productivity of a geothermal plant depends on a variety of factors, including the chemical composition of the thermal water, the water temperature, and the water production rate. Another important, yet rarely considered factor is the microbiology. In the subsurface, the majority of the microorganisms live attached to the rocks. However, microorganisms can also become detached and carried off with the produced thermal water and thus enter geothermal power plants. Therefore, the interaction of microbiological processes with geothermal plants should be considered from both sides. First, how do microorganisms influence the use of geothermal energy and second, how does the use of geothermal energy influence the subsurface microbiology (Fig. 4).

## ***3.2 Geothermal Energy and its Effects on Subsurface Microbiology***

### **3.2.1 Shallow Geothermal Energy**


For the extraction of shallow geothermal energy, closed loop systems are installed (Fig. 4). The fluid inside the system extracts heat from the underground, which is used in different ways depending on the season: in winter, heat is extracted from the underground and used for heat supply of buildings; in summer, when the ambient temperature is higher than the underground temperature, the cold fluid is used to cool buildings. Subsequently, the warmed water is re-injected into the underground. As a consequence, the aquifer temperature range (of 10–12 °C) decreases and increases, respectively, and microorganisms will have to manage temperature fluctuations of  $\pm 6\text{ }^{\circ}\text{C}$  [14, 86].

Changes in temperature not only affect the metabolic activity of microorganisms, but also the composition of the overall microbial community. In summer, locally increased temperatures (e.g., at injections sites) can promote growth of mesophilic bacteria whereas heat extraction in winter promotes microbial species that grow at lower temperatures (psychrophilic microorganisms). Temperature fluctuations also affect the chemical composition of the groundwater as it changes the solubility of solids, liquids, and gases, including potential organic and

**Table 1** Top 15 countries using geothermal energy

<b>Geothermal Electricity Production</b>		<b>Geothermal Direct Use</b>	
Country	GWh/yr	Country	GWh/yr
USA	16,603	China	20,932
Philippines	10,311	USA	15,710
Indonesia	9,600	Sweden	12,585
Mexico	7,047	Turkey	10,247
Italy	5,520	Japan	7,139
Iceland	4,597	Norway	7,000
New Zealand	4,055	Iceland	6,768
Japan	3,064	France	3,592
Kenya	1,430	Germany	3,546
El Salvador	1,422	Netherlands	2,972
Costa Rica	1,131	Italy	2,762
Turkey	490	Hungary	2,713
Papua New Guinea	450	New Zealand	2,654
Russia	441	Canada	2,465
Nicaragua	310	Finland	2,325

Source [www.iea.org](http://www.iea.org)

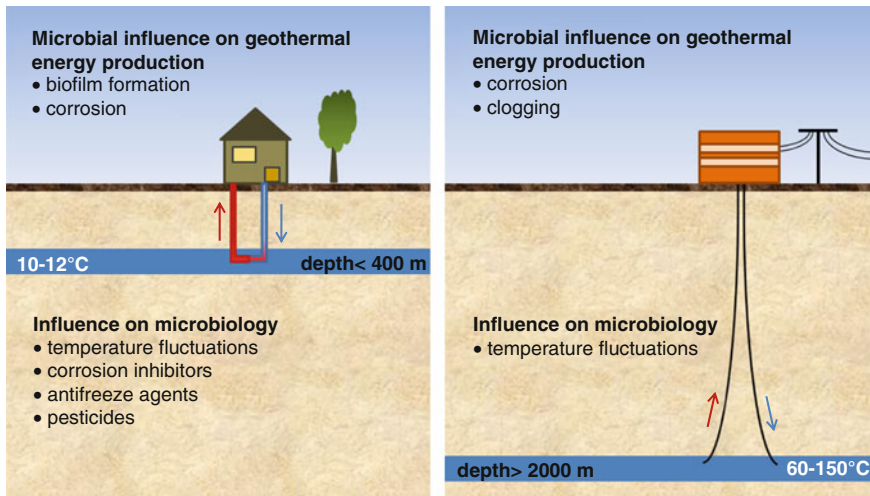

**Fig. 4** Mutual influence of microbiology and geothermal energy in both shallow (*close loop*, left) and great (*open loop*, right) depth, exemplified for heat extraction from shallow and deep aquifers

inorganic substrates. Therefore, different substrate spectra will become available. For example, increased temperature will lower the solubility of oxygen (and other gases) and lead to a limitation of oxygen-dependent metabolic pathways.

### 3.2.2 Deep Geothermal Energy

Deep geothermal energy plants operate as open loop systems (Fig. 4) where hot water is extracted from the deep subsurface and is re-injected after passing the heat exchanger. The microbial community in greater depths considerably differs from that in shallow depth [57]. Despite the extreme conditions encountered in deep habitats (high temperatures and pressures, high salinity), deep aquifers have been shown to harbor a live and active biosphere [84]. Such ecosystems are often dominated by thermotolerant and thermophilic bacteria and archaea with mainly anaerobic metabolisms (e.g., fermenting, methanogenic, sulphate-reducing microorganisms) [1, 27, 71]. The deep subsurface also harbors populations of spore-forming bacteria, which are able to survive adverse conditions (e.g., heat, drought, substrate limitation) by formation of endospores. Metabolically, spores are largely inactive, but might germinate when temperature and nutrient supply conditions change and thereby influence the quality of geothermal water.

The operation of geothermal plants faces problems that mainly arise from the activity of sulfate-reducing bacteria. Sulfate reducers are capable of oxidizing iron ferrous metals, which results in corrosion of tubings and pipes [25, 28]. Also,

formation of sulfidic precipitates (e.g., FeS) can lead to clogging and therefore to reduced water production rates [58]. Both corrosion and clogging can cause serious economic problems based on reduced performance of the geothermal plant.

### 3.3 Further Research

Temperature is an important factor that influences both microbial viability and metabolic activity. Therefore, research should focus on the effects of geothermal-induced temperature fluctuations on the chemical groundwater composition, nutrient supply, and the microbial community in both shallow and great depths.

Concerning the exploitation of shallow geothermal energy, potential leakage of fluid additives into groundwater raises questions concerning degradability and toxicity of the released substances, and the associated effects on microbial community composition. Also, the preservation of high groundwater quality is important because shallow groundwater is a source of drinking water (in Germany, 75 % is produced from it).

In the deep subsurface, most concerns arise from clogging and corrosion mediated by sulfate-reducing microorganisms. Sulfate reduction rates should be determined in order to estimate the extent of economic damage caused by these processes. Concerning spore-forming microbial populations, investigations are needed that address the effect of temperature fluctuations and/or changes in nutrient supply conditions on both the formation and germination of endospores.

## References

1. Alawi M, Lerm S, Vetter A, Wolfgramm M, Seibt A, Würdemann H (2013) Diversity of sulfate-reducing bacteria in a plant using deep geothermal energy. *Grundwasser* 16(2):105–112
2. Alfreider A, Krössbacher M, Psenner R (1997) Groundwater samples do not reflect bacterial densities and activity in subsurface systems. *Water Res* 31(4):832–840
3. Arens P, Tuschewitzki GJ, Wollmann M, Follner H, Jacobi H (1995) Indicators for microbiologically induced corrosion of copper pipes in a cold-water plumbing system. *Zentralbl Hyg Umweltmed* 196(5):444–454
4. Baker SJ, West JM, Metcalfe R, Noy DJ, Yoshida H, Aoki K (1998) A biogeochemical assessment of the Tono site, Japan. *J Contam Hydrol* 35(1–3):331–340
5. Baranenko VI, Kirov VS (1989) Solubility of hydrogen in water in a broad temperature and pressure range. *Sov Atom Energy* 66(1):30–34
6. Beal EJ, House CH, Orphan VJ (2009) Manganese- and iron-dependent marine methane oxidation. *Science* 325(5937):184–187
7. Beech IB, Sunner J (2004) Biocorrosion: towards understanding interactions between biofilms and metals. *Curr Opin Biotechnol* 15(3):181–186
8. Bennett PC, Rogers JR, Choi WJ, Hiebert FK (2001) Silicates, silicate weathering, and microbial ecology. *Geomicrobiol J* 18(1):3–19

9. Bertani R (2007) World geothermal power generation in 2007. Presented at the European Geothermal Congress, Unterhaching, Germany, 30 May to 1 June 2007
10. Blöchl E, Rachel R, Burggraf S, Hafenbradl D, Jannasch HW, Stetter KO (1997) *Pyrolobus fumarii*, gen. and sp. nov., represents a novel group of archaea, extending the upper temperature limit for life to 113°C. *Extremophiles* 1(1):14–21
11. Bock M, Bosecker K, Kämpfer P, Dott W (1994) Isolation and characterization of heterotrophic, aerobic bacteria from oil storage caverns in northern Germany. *Appl Microbiol Biotechnol* 42(2–3):463–468
12. Boone DR, Liu Y, Zhao Z-J, Balkwill DL, Drake GR, Stevens TO, Aldrich HC (1995) *Bacillus infernus* sp. nov., an Fe(III)- and Mn(IV)-reducing anaerobe from the deep terrestrial subsurface. *Int J Syst Bacteriol* 45(3):441–448
13. Boreham C, Underschultz J, Stalker L, Kirste D, Freifeld B, Jenkins C, Ennis-King J (2011) Monitoring of CO<sub>2</sub> storage in a depleted natural gas reservoir: gas geochemistry from the CO<sub>2</sub>CRC Otway Project, Australia. *Int J Greenh Gas Con* 5(4):1039–1054
14. Brielmann H, Lueders T, Schreglmann K, Ferraro F, Avramov M, Hammerl V, Blum P, Bayer P, Griebler C (2011) Oberflächennahe Geothermie und ihre potenziellen Auswirkungen auf Grundwasserökosysteme. *Grundwasser* 16(2):77–91
15. Bryant E (1997) Climate process and change. Cambridge University Press, Cambridge
16. Buschbach TC, Bond DC (1974) Underground storage of natural gas in Illinois, 1973. Department of Registration and Education, Illinois State Geological Survey, Urbana
17. Colwell FS, D'Hondt S (2013) Nature and extent of the deep biosphere. *Rev Mineral Geochem* 75:547–574
18. Conrad R (1999) Contribution of hydrogen to methane production and control of hydrogen concentrations in methanogenic soils and sediments. *FEMS Microbiol Ecol* 28(3):193–202
19. Cord-Ruwisch R, Seitz H-J, Conrad R (1988) The capacity of hydrogenotrophic anaerobic bacteria to compete for traces of hydrogen depends on the redox potential of the terminal electron acceptor. *Arch Microbiol* 149(4):350–357
20. Crozier TE, Yamamoto S (1974) Solubility of hydrogen in water, sea water, and sodium chloride solutions. *J Chem Eng Data* 19(3):242–244
21. Davis JB, Updegraff DM (1954) Microbiology in the petroleum industry. *Bacteriol Rev* 18(4):215
22. de Angelis MA, Baross JA, Lilley MD (1991) Enhanced microbial methane oxidation in water from a deep-sea hydrothermal vent field at simulated in situ hydrostatic pressures. *Limnol Oceanogr* 36(3):565–570
23. Decho AW (2010) Overview of biopolymer-induced mineralization: what goes on in biofilms? *Ecol Eng* 36(2):137–144
24. Deusner C, Meyer V, Ferdelman TG (2010) High-pressure systems for gas-phase free continuous incubation of enriched marine microbial communities performing anaerobic oxidation of methane. *Biotechnol Bioeng* 105(3):524–533
25. Dinh HT, Kuever J, Muszmann M, Hassel AW, Stratmann M, Widdel F (2004) Iron corrosion by novel anaerobic microorganisms. *Nature* 427(6977):829–832
26. Ehinger S (2011) Microbial communities and microbial processes in a German gas reservoir and their relevance for CO<sub>2</sub> storage. Dissertation, TU Bergakademie Freiberg, Freiberg
27. Ehinger S, Seifert J, Kassahun A, Schmalz L, Hoth N, Schlömann M (2009) Predominance of *Methanobolus* spp. and *Methanoculleus* spp. in the archaeal communities of saline gas field formation fluids. *Geomicrobiol J* 26(5):326–338
28. Enning D, Venzlaff H, Garrelfs J, Dinh HT, Meyer V, Mayrhofer K, Hassel AW, Stratmann M, Widdel F (2012) Marine sulfate-reducing bacteria cause serious corrosion of iron under electroconductive biogenic mineral crust. *Environ Microbiol* 14(7):1772–1787
29. Evans DJ (2008) An appraisal of underground gas storage technologies and incidents, for the development of risk assessment methodology. Report by the British Geological Survey to the Health & Safety Executive (HSE), HSE Research Report Series, Number RR605

30. Fischer S, Zemke K, Liebscher A, Wandrey M (2011) Petrophysical and petrochemical effects of long-term CO<sub>2</sub>-exposure experiments on brine-saturated reservoir sandstone. *Energy Procedia* 4:4487–4494
31. Florette M, Rückheim J, Voigtländer G, Wendel H (2007) Gaz de France's current and future involvement in CCS projects—a commitment to sustainable development. *Geotechnologies Sci Rep* 9:73–81
32. Francis CA, Obratsova AY, Tebo BM (2000) Dissimilatory metal reduction by the facultative anaerobe *Pantoea agglomerans* SP1. *Appl Environ Microbiol* 66(2):543–548
33. Gasda S, Bachu S, Celia M (2004) Spatial characterization of the location of potentially leaky wells penetrating a deep saline aquifer in a mature sedimentary basin. *Environ Geol* 46(6–7):707–720
34. Gieg LM, Jack TR, Foght JM (2011) Biological souring and mitigation in oil reservoirs. *Appl Microbiol Biotechnol* 92(2):263–282
35. Gniese C, Frerichs J, Krüger M, Hoth N, Kassahun A, Schlömann M (2011) The bacterial community in the natural gas reservoir Altmark (Germany) and the assessment of indigenous microorganisms. In: *Biospektrum Sonderausgabe: Tagungsband zur VAAM-Jahrestagung 2011, Karlsruhe, Germany, 03–06 April 2011*. Spektrum Akademischer Verlag, p 117
36. Graupner T, Kassahun A, Rammlmair D, Meima JA, Kock D, Furche M, Fiege A, Schippers A, Melcher F (2007) Formation of sequences of cemented layers and hardpans within sulfide-bearing mine tailings (mine district Freiberg, Germany). *Appl Geochem* 22(11):2486–2508
37. Griebler C, Mindl B, Slezak D, Geiger-Kaiser M (2002) Distribution patterns of attached and suspended bacteria in pristine and contaminated shallow aquifers studied with an in situ sediment exposure microcosm. *Aquat Microb Ecol* 28(2):117–129
38. Gunter WD, Perkins EH, McCann TJ (1993) Aquifer disposal of CO<sub>2</sub>-rich gases: reaction design for added capacity. *Energy Convers Manage* 34(9–11):941–948
39. Hazen T, Jiménez L, López de Victoria G, Fliermans C (1991) Comparison of bacteria from deep subsurface sediment and adjacent groundwater. *Microb Ecol* 22(1):293–304
40. Head IM, Jones DM, Larter SR (2003) Biological activity in the deep subsurface and the origin of heavy oil. *Nature* 426(6964):344–352
41. Hoth N, Kassahun A, Krüger M, Gniese C, Frerichs J, Muschalle T, Reich M, Schlömann M (2011) Gesamtabschlussbericht des Forschungsprojekts: Untersuchung der biogeochemischen Transformation von im tiefen Untergrund gespeichertem CO<sub>2</sub>, RECOBIO-2. Freiberg, Germany
42. Hoth N, Kassahun A, Seifert J, Krüger M, Bretschneider H, Gniese C, Frerichs J, Simon A, Simon E, Muschalle T (2009) Investigation of CO<sub>2</sub> induced biogeochemical reactions and active microorganisms of two German gas fields. Presented at the EGU General Assembly Conference, Wien, Austria, 19–24 April 2009
43. International Energy Agency Greenhouse Gas (IEAGHG) (2013) <http://www.ieaghg.org/>. Accessed 07 June 2013
44. IPCC (2005) IPCC special report on carbon dioxide capture and storage. In: Metz B, Davidson O, de Coninck HC, Loos M, Meyer LA (eds) Prepared by working group III of the intergovernmental panel on climate change. Cambridge University Press, Cambridge
45. IPCC (2007) Climate change 2007: the physical science basis. In: Solomon S, Qin D, Manning M, Chen Z, Marquis M, Averyt KB, Tignor M, Miller HL (eds) Contribution of working group I to the fourth assessment report of the intergovernmental panel on climate change. Cambridge University Press, Cambridge
46. Ivanova AE, Borzenkov IA, Tarasov AL, Milekhina EI, Belyaev SS (2007) A microbiological study of an underground gas storage in the process of gas injection. *Microbiology* 76(4):453–460
47. Jones DG, Lister TR, Smith DJ, West JM, Coombs P, Gadalia A, Brach M, Annunziatellis A, Lombardi S (2011) In Salah gas CO<sub>2</sub> storage JIP: surface gas and biological monitoring. *Energy Procedia* 4:3566–3573



48. Kharaka YK, Thordsen JJ, Hovorka SD, Seay Nance H, Cole DR, Phelps TJ, Knauss KG (2009) Potential environmental issues of CO<sub>2</sub> storage in deep saline aquifers: geochemical results from the Frio-I Brine Pilot test, Texas, USA. *Appl Geochem* 24(6):1106–1112
49. Kinrade SD, Del Nin JW, Schach AS, Sloan TA, Wilson KL, Knight CTG (1999) Stable five- and six-coordinated silicate anions in aqueous solution. *Science* 285(5433):1542–1545
50. Kleinitz W, Boehling E (2005) Underground gas storage in porous media-operating experience with bacteria on gas quality. Presented at the SPE Europec/EAGE Annual Conference, Madrid, Spain, 13–16 June 2005
51. Knauss KG, Johnson JW, Steefel CI (2005) Evaluation of the impact of CO<sub>2</sub>, co-contaminant gas, aqueous fluid and reservoir rock interactions on the geologic sequestration of CO<sub>2</sub>. *Chem Geol* 217(3–4):339–350
52. Knittel K, Boetius A (2009) Anaerobic oxidation of methane: progress with an unknown process. *Annu Rev Microbiol* 63(1):311–334
53. Köhler S, Zemke J, Becker W, Wiebach J, Liebscher A, Möller F, Bannach A (2013) Operational reservoir monitoring at the CO<sub>2</sub> pilot storage site Ketzin, Germany. In: Hou MZ, Xie H, Were P (eds) *Clean energy systems in the subsurface: production, storage and conversion*. Springer Series in Geomechanics and geoengineering. Springer, Berlin-Heidelberg, pp 53–63
54. Kotelnikova S (2002) Microbial production and oxidation of methane in deep subsurface. *Earth-Sci Rev* 58(3–4):367–395
55. Krüger M, Treude T, Wolters H, Nauhaus K, Boetius A (2005) Microbial methane turnover in different marine habitats. *Palaeogeogr Palaeoclimatol Palaeoecol* 227(1–3):6–17
56. Kühn M, Barth J, Baumann G, Becker V, Bock M, Buske S, Fritschen R, Giese R, Groß C, Henningses J, Haupt L, Kock D, Krüger M, Morozova D, Myrntinen A, Würdemann H (2013) Reservoir and cap rock monitoring. In: Kühn M, Münch U (eds) *Clean. Advanced Technologies in Earth Sciences*. Springer, Berlin-Heidelberg, pp 99–130
57. Lerm S, Alawi M, Miethling-Graff R, Seibt A, Wolfgramm M, Rauppach K, Würdemann H (2011) Mikrobiologisches Monitoring in zwei geothermisch genutzten Aquiferen des Norddeutschen Beckens. *Z geol Wiss* 39:195–212
58. Lerm S, Westphal A, Miethling-Graff R, Alawi M, Seibt A, Wolfgramm M, Würdemann H (2013) Thermal effects on microbial composition and microbiologically induced corrosion and mineral precipitation affecting operation of a geothermal plant in a deep saline aquifer. *Extremophiles* 17(2):311–327
59. Lovley DR (1991) Dissimilatory Fe(III) and Mn(IV) reduction. *Microbiol Rev* 55(2):259–287
60. Lovley DR, Chapelle FH (1995) Deep subsurface microbial processes. *Rev Geophys* 33(3):365–381
61. Magot M, Ollivier B, Patel BC (2000) Microbiology of petroleum reservoirs. *Antonie Leeuwenhoek* 77(2):103–116
62. Mahinpey N, Asghari K, Mirjafari P (2011) Biological sequestration of carbon dioxide in geological formations. *Chem Eng Res Des* 89(9):1873–1878
63. May F, Brune S, Gerling P, Krull P (2003) Möglichkeiten zur untertägigen Speicherung von CO<sub>2</sub> in Deutschland-eine Bestandsaufnahme. *Geotechnik* 26(3):162–172
64. Ménez B, Dupraz S, Gérard E, Guyot F, Rommevaux Jestin C, Libert M, Jullien M, Michel C, Delorme F, Battaglia-Brunet F (2007) Impact of the deep biosphere on CO<sub>2</sub> storage performance. *Geotechnologies Sci Rep* 9:150–163
65. Milucka J, Ferdelman TG, Polerecky L, Franzke D, Wegener G, Schmid M, Lieberwirth I, Wagner M, Widdel F, Kuypers MMM (2012) Zero-valent sulphur is a key intermediate in marine methane oxidation. *Nature* 491(7425):541–546
66. Mitchell AC, Phillips AJ, Hamilton MA, Gerlach R, Hollis WK, Kaszuba JP, Cunningham AB (2008) Resilience of planktonic and biofilm cultures to supercritical CO<sub>2</sub>. *J Supercrit Fluids* 47(2):318–325

67. Mitchell AC, Phillips AJ, Hiebert R, Gerlach R, Spangler LH, Cunningham AB (2009) Biofilm enhanced geologic sequestration of supercritical CO<sub>2</sub>. *Int J Green Gas Con* 3(1):90–99
68. Morita RY (1999) Is H<sub>2</sub> the universal energy source for long-term survival? *Microb Ecol* 38(4):307–320
69. Morozova D, Alawi M, Shaheed M, Krüger M, Kock D, Würdemann H (2011) The influence of microbial activity on rock fluid interaction: baseline characterization of deep biosphere for enhanced gas recovery in the Altmark natural gas reservoir. *Energy Procedia* 4:4633–4640
70. Morozova D, Wandrey M, Alawi M, Zimmer M, Vieth A, Zettlitz M, Würdemann H (2010) Monitoring of the microbial community composition in saline aquifers during CO<sub>2</sub> storage by fluorescence in situ hybridisation. *Int J Greenh Gas Con* 4(6):981–989
71. Morozova D, Zettlitz M, Let D, Würdemann H (2011) Monitoring of the microbial community composition in deep subsurface saline aquifers during CO<sub>2</sub> storage in Ketzin, Germany. *Energy Procedia* 4:4362–4370
72. Mu A, Billman-Jacobe H, Boreham C, Schacht U, Moreau JW (2011) How do deep saline aquifer microbial communities respond to supercritical CO<sub>2</sub> injection? Presented at the AGU Fall Meeting, San Francisco, California, 5–9 December 2011
73. Muyzer G, Stams AJM (2008) The ecology and biotechnology of sulphate-reducing bacteria. *Nat Rev Micro* 6(6):441–454
74. Natural Gas (2013) [www.naturalgas.org](http://www.naturalgas.org). Accessed 07 June 2013
75. Nauhaus K, Boetius A, Krüger M, Widdel F (2002) In vitro demonstration of anaerobic oxidation of methane coupled to sulphate reduction in sediment from a marine gas hydrate area. *Environ Microbiol* 4(5):296–305
76. Oren A (2002) Diversity of halophilic microorganisms: environments, phylogeny, physiology, and applications. *J Ind Microbiol Biotechnol* 28(1):56–63
77. Palandri JL, Kharaka YK (2005) Ferric iron-bearing sediments as a mineral trap for CO<sub>2</sub> sequestration: iron reduction using sulfur-bearing waste gas. *Chem Geol* 217(3–4):351–364
78. Palandri JL, Rosenbauer RJ, Kharaka YK (2005) Ferric iron in sediments as a novel CO<sub>2</sub> mineral trap: CO<sub>2</sub>–SO<sub>2</sub> reaction with hematite. *Appl Geochem* 20(11):2038–2048
79. Pikuta EV, Hoover RB, Tang J (2007) Microbial extremophiles at the limits of life. *Crit Rev Microbiol* 33(3):183–209
80. Raczkowski J, Turkiewicz A, Kapusta P (2004) Elimination of biogenic hydrogen sulfide in underground gas storage: a case study. Presented at the SPE Annual Technical Conference and Exhibition Houston, Texas, 26–29 September 2004
81. Reiffenstein RJ, Hulbert WC, Roth SH (1992) Toxicology of hydrogen sulfide. *Annu Rev Pharmacol Toxicol* 32(1):109–134
82. Reith F (2011) Life in the deep subsurface. *Geology* 39(3):287–288
83. Rogers JR, Bennett PC (2004) Mineral stimulation of subsurface microorganisms: release of limiting nutrients from silicates. *Chem Geol* 203(1–2):91–108
84. Sand W (2003) Microbial life in geothermal waters. *Geothermics* 32(4–6):655–667
85. Scherf A-K, Zetzl C, Smirnova I, Zettlitz M, Vieth-Hillebrand A (2011) Mobilisation of organic compounds from reservoir rocks through the injection of CO<sub>2</sub>—comparison of baseline characterization and laboratory experiments. *Energy Procedia* 4:4524–4531
86. Schippers A, Reichling J (2006) Laboruntersuchungen zum Einfluss von Temperaturveränderungen auf die Mikrobiologie des Untergrundes. *Grundwasser* 11(1):40–45
87. Scholes CA, Kentish SE, Stevens GW (2009) Effects of minor components in carbon dioxide capture using polymeric gas separation membranes. *Sepa Purif Rev* 38(1):1–44
88. Šmígán P, Greksák M, Kozánková J, Buzek F, Onderka V, Wolf I (1990) Methanogenic bacteria as a key factor involved in changes of town gas stored in an underground reservoir. *FEMS Microbiol Lett* 73(3):221–224
89. Stevens T (1997) Lithoautotrophy in the subsurface. *FEMS Microbiol Rev* 20(3–4):327–337

90. Takami H, Inoue A, Fuji F, Horikoshi K (1997) Microbial flora in the deepest sea mud of the Mariana Trench. *FEMS Microbiol Lett* 152(2):279–285
91. The European Wind Energy Association (EWEA) (2013) Wind in power. 2012 European statistics
92. The World Wind Engery Association (WWEA) (2012) 2012—Half-year report
93. Videla HA, Herrera LK (2005) Microbiologically influenced corrosion: looking to the future. *Int Microbiol* 8(3):169–180
94. von Bremen L (2009) Storage and transport capacities in Europe for a full renewable power supply system. Presented at the European Wind Energy Conference, Marseille, France, 16–19 March 2009
95. Vreeland RH, Piselli AF Jr, McDonnough S, Meyers SS (1998) Distribution and diversity of halophilic bacteria in a subsurface salt formation. *Extremophiles* 2(3):321–331
96. Wandrey M, Fischer S, Zemke K, Liebscher A, Scherf A-K, Vieth-Hillebrand A, Zettlitzer M, Würdemann H (2010) Monitoring petrophysical, mineralogical, geochemical and microbiological effects of CO<sub>2</sub> exposure—Results of long-term experiments under in situ conditions. *Energy Procedia* 4:3644–3650
97. Wandrey M, Pellizari L, Zettlitzer M, Würdemann H (2011) Microbial community and inorganic fluid analysis during CO<sub>2</sub> storage within the frame of CO<sub>2</sub>SINK—Long-term experiments under in situ conditions. *Energy Procedia* 4:3651–3657
98. Wenzhöfer F, Asendorf V, Grünke S, Hagemann J, Hoge U, Hovland M, Lehmenhecker S, Shurn K, Weiz E, Wulff T (2012) Impact of potential CO<sub>2</sub> leakage on marine ecosystems—RV Heincke cruise report HE 377, 16–24 April, Bremerhaven, Germany
99. White DC, Sutton SD, Ringelberg DB (1996) The genus *Shingomonas*: physiology and ecology. *Curr Opin Biotechnol* 7(3):301–306
100. Wilhelms A, Larter SR, Head I, Farrimond P, di-Primio R, Zwach C (2001) Biodegradation of oil in uplifted basins prevented by deep-burial sterilization. *Nature* 411(6841):1034–1037
101. Yamamoto S, Alcauskas JB, Crozier TE (1976) Solubility of methane in distilled water and seawater. *J Chem Eng Data* 21(1):78–80
102. Zettlitzer M, Moeller F, Morozova D, Lokay P, Würdemann H (2010) Re-establishment of the proper injectivity of the CO<sub>2</sub>-injection well Ktzi 201 in Ketzin, Germany. *Int J Greenh Gas Con* 4(6):952–959

Geobiotechnology II

Energy Resources, Subsurface Technologies, Organic  
Pollutants and Mining Legal Principles

Schippers, A.; Glombitza, F.; Sand, W. (Eds.)

2014, VII, 200 p. 32 illus., 8 illus. in color., Hardcover

ISBN: 978-3-662-44473-3