

Generalization of 3D IFC Building Models

Andreas Geiger, Joachim Benner and Karl Heinz Haefele

Abstract Today, Building Information Modeling (BIM) is mainly used in architecture. Typically, a BIM model contains detailed geometric and semantic information for design evaluation, simulation, and construction of the building. If, as on the regional and city levels, more than one building is considered, the information content of detailed BIM models might be too high. For applications like noise simulation or emergency management, representing buildings as block models, reduced outer-shell models or simplified indoor models are more suitable. Such models are typically found in Geospatial Information System (GIS) applications. This paper describes a process for BIM building models to extract different generalized representations for buildings and building elements. As an example, the definitions for such representations are based on the LoD concept of CityGML.

1 Introduction

Architectural building models are typically considered to be highly detailed. However, this is not the case at all stages of the design and construction process. In order to define and illustrate the characteristics of building models in different project phases, Levels of Development have been proposed by American Institute of Architects (AIA [2013](#)).

These Levels of Development do not necessarily support the needs of building models in other areas of application and at other scales like, for example, in the case

A. Geiger (✉) · J. Benner · K.H. Haefele
Institute for Applied Computer Science, Karlsruhe Institute of Technology,
Karlsruhe, Germany
e-mail: andreas.geiger@kit.edu

J. Benner
e-mail: joachim.benner@kit.edu

K.H. Haefele
e-mail: karl-heinz.haefele@kit.edu

of geospatial data on the regional or city levels. Such applications often require domain-specific generalizations of 3D building data. One example of such a building model is the Building Module of the City Geography Markup Language (CityGML). It allows the representation of buildings at five dedicated Levels of Detail (LoD). With higher LoD, the geometric representation is refined and the semantic richness potentially increases.

CityGML buildings can be generated automatically, semi-automatically or manually, depending on the envisaged Level of Detail:

- LoD1—the building is geometrically represented as block model, where the footprint may be taken from cadastral maps and the height from laser scanning data or from cadastral data too.
- LoD2—based on a combination of 2D cadastral data and airborne laser scanning or photogrammetric data, the building's exterior shell is represented in a geometrically generalized way. Different parts of the exterior shell are semantically classified as e.g., wall or roof surfaces.
- LoD3—the exterior shell is represented in a geometrically detailed way. In addition to LoD2, doors and windows are identified in the exterior shell and represented as separate objects with surface geometry. This data may be extracted from terrestrial laser scanning data.
- LoD4—extension of the LoD3 model by an interior model. At the moment, this can only be done manually.

For existing buildings, automatic processes for generating LoD1 and LoD2 models are available. LoD3 and LoD4 models as well as any 3D model of a newly planned building have to be generated manually. In these cases, 3D BIM models are frequently available, but cannot be directly used for GIS applications. The central objective of this paper is to describe a generalization process transforming 3D BIM models into adequate GIS structures. The process is described on the basis of the CityGML standard, focusing on Levels of Detail 1–3, where only the building's exterior shell is represented. The transformation process starts using the Industry Foundation Classes (IFC) data format (Liebich 2007).

2 State of the Art of Generalizing 3D Building Models

The concept of generalization was originally introduced in 2D cartography. The International Cartographic Association (ICA) defines generalization as “the selection and simplified representation of detail appropriate to the scale and/or purpose of a map” (ICA 1973). Typical techniques are selection of the most important map features by simultaneously removing unnecessary details, simplifying or smoothing complex map features, and combination of small features. Many of these techniques are also relevant for the generalization of 3D building models.

For simplifying arbitrary (triangle) meshes, a number of general approaches exist. Many of them are based on special metrics for comparing different meshes

(Luebke et al. 2003). Other approaches for mesh simplification, being more suited to preserve the characteristic structures of buildings, are based on the extraction of geometrically defined features. During the simplification process, extracted features are evaluated and removed as necessary. Reviews of these approaches can be found in Babic et al. (2008) and Thakura et al. (2009).

Besides general mesh simplification, there also exist a number of specific approaches to generalizing 3D building models. Kada (2002) identifies characteristic building structures (e.g. coplanar, vertical or parallel parts) in a surface model, which are preserved in a merging process of surface parts. Thiemann and Sester (2004) segment a 3D building model, classify and process extracted segments and generate a generalized model by removing selected segments. In the approach by Kada (2006), a building model is transformed into a new representation based on half-spaces. The new representation supports a non-iterative process for eliminating “small” building parts. More approaches to generalizing 3D building models can be found in the review articles by Meng and Forberg (2006) and Sester (2007).

The techniques mentioned in the last paragraph are based on a purely geometric 3D building model. If data are available in a semantic data format like CityGML or IFC, additional information is available which can be used for the generalization process. Many such contributions use CityGML data of higher LoD (3 or 4) as starting point and try to transform them into LoD1 or LoD2 representations (Fan and Meng 2012; Baig and Rahmann 2013). Other authors discuss transformation and generalization processes based on IFC, which is also the central topic of this paper.

A first approach concerning a transformation from IFC building models into CityGML LoD1 was described by Nagel (2006) and Nagel and Häfele (2007). The CityGML concept according to LoD1 is characterized and strategies for the geometric transformation process are described. These methods are part of the generalization process presented here.

A solution for an IFC to CityGML LoD3 transformation in a three-stages generalization process is presented by Donkers (2013). Starting with a semantic filtering, relevant building elements are extracted. The second stage is the geometric transformation using Boolean and morphological operations like dilation and erosion to generate a volumetric representation of the complete building. The third stage called refinement is used to guarantee the compliance with ISO 19107 (ISO 19107:2003). The process is focused on LoD3 with an outlook to LoD4. LoD1 and LoD2 are not considered.

A mapping framework for transforming BIM to GIS in different LoD is presented by Cheng et al. (2013). To cover the semantic information, a new CityGML Application Domain Extension (ADE) called Semantic City Model was developed. The real geometric transformation seems not to be realized at the moment.

In Berlo (2011), the focus is set on the extension of CityGML with semantic IFC data. The GeoBIM-ADE uses IFC as source for GIS data.

An investigation is presented by El-Mekawy et al. (2012) concerning how much information of an IFC model can be transformed into a CityGML model. The disquisition is focused on the semantic information. It comes to the conclusion that a conversion implies data loss and thus a unified building model is proposed.

3 Building Models

The described generalization process is based on the open BIM standard IFC (Eastman 1999). If possible, all results are stored in the IFC data model as additional representations. In a second process, the results can be converted into the target format CityGML.

The Industry Foundation Classes (ISO 16739:2013) are an open standard for BIM, developed by buildingSMART (bsi 2014). It is based on STEP (ISO 10303) and the standardized data modelling language for product modelling EXPRESS (ISO 10303-11:2004), representing an entity-relationship model. Since version IFC4 it is an official international standard ISO 16739 (ISO 16739:2013). IFC defines two different encodings for the model data: The STEP Physical File (SPF) defined by ISO 10303-21 (ISO 10303-21:2002) and the STEP-XML defined by ISO 10303-28 (ISO 10303-28:2007). The most frequently used format is the SPF, having the advantage of compact size and being a human readable ASCII file format. The XML-based version is mostly used for exchanging partial models. Due to the large file size of the models, it is only used if interoperability with XML tools is required.

The version IFC2 × 3 contains 653 entities covering all phases of a building's life cycle. For Architecture, Engineering and Construction (AEC) modelling aspects, the default geometric representation of physical building elements is volumetric. This can be a parametric representation (e.g. extrusion of a parametric profile), a Constructive Solid Geometry (CSG) or a boundary representation (B-rep). IFC uses local Cartesian coordinates. For the site object, optionally a global geographic location can be specified. One or more buildings and building complexes can be represented with their complete building structure. The physical building elements are represented as objects with relations. Such relations can be used, e.g., for material information, properties or connections between building elements.

In IFC, a building element can have multiple geometric representations, which are differentiated by an identifier. There are pre-defined identifiers like, e.g., 'Body', 'Axis' or 'Footprint'. This concept is not comparable to the LoD concept of CityGML, because it mainly reflects modelling aspects of the corresponding AEC tools.

The City Geography Markup Language (CityGML) (Gröger et al. 2012) is an Open Geospatial Consortium (OGC) encoding standard for virtual 3D city models. CityGML is an application schema of the extensible Geography Markup Language (GML 3.1.1) (Cox et al. 2004). In contrast to 3D graphic formats, CityGML

describes 3D object by their semantic meaning, their properties and their relations to other features. In order to cover major themes of a city, the standard is organized in 13 thematic modules (Gröger et al. 2012).

The most frequently used module of CityGML is the *Building* module, supporting five dedicated Levels of Details for representing buildings (see Sect. 1). A building can be structured into building parts. Exterior components like balconies or chimneys, which have a major impact on the outer characteristics of the building, are modelled as building installations. In LoD4, CityGML uses rooms as a spatial structure for the interior.

Buildings, building parts, rooms, and building installations can be represented by surfaces or solids. All these features can be semantically structured by, e.g., wall, roof or ground surfaces. Volumetric building elements like walls, roofs or slabs are not supported by CityGML.

IFC as well as the *Building* module of CityGML describe buildings as semantic objects with properties and relations and therefore can be considered as Building Information Models. Due to the intended application areas, used modelling techniques, and the history of the two organizations promoting the standards, significant differences between the models exist.

The most relevant difference between IFC and CityGML regarding data conversion is the modelling of buildings and building elements like walls, slabs or roofs. IFC usually uses *IfcBuilding* as pure container for building elements. Building elements are objects with properties, relations, and usually volumetric geometry representations. In contrast, CityGML allows *Building* to have an explicit solid or surface geometry. Building elements are not modeled as objects but as boundary surfaces for buildings or rooms without any further property or relations to other boundary surfaces.

This means that the volumetric representation of building elements in IFC has to be converted into boundary surfaces of the CityGML building or room. Figure 1 shows a simple example without considering the slabs of each storey and the different wall connections (butt joint, meter joint).

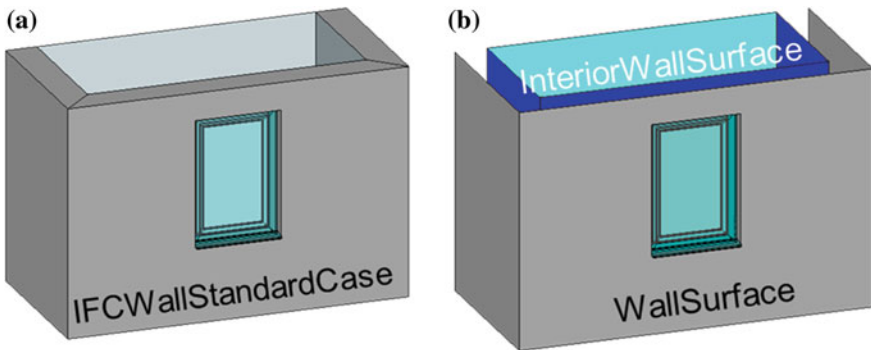


Fig. 1 **a** IFC solid representation, and **b** CityGML surface representation

Another difference is the way building models are geo-referenced. While IFC is using local Cartesian coordination systems and with geographic coordinates on the site and the north direction, CityGML is using directly global coordinates regarding the given reference coordinate system. The conversion between the different geo-referencing methods can be done by well-known coordinate transformations.

4 Generalization Process

The goal of generalization is to reduce the geometric and semantic complexity of a building model without losing relevant information. As a first step, an intermediate data model, which is called *ExtrusionBaseModel*, is generated. Based on this model, LoD1 and LoD2 representations can be derived. LoD3 and (in the future) LoD4 are generated consecutively on the basis of the LoD2 model (see Fig. 2).

A suitable IFC model is prerequisite for a successful generalization. This means that the building model needs to have a closed exterior shell and is generally designed with walls, slabs, and roofs. The upper boundary of the building has to be modelled with slabs or roof elements. Additionally, horizontal slabs represent more or less the horizontal structure of the building with or without an explicitly defined storey structure. If the storey's structure is not defined in the data, it will be derived by interpreting slab elements.

4.1 Intermediate Data Model

As a first step of the generalization process, an intermediate data model is generated (see Fig. 3) taking into account only relevant building elements (see Fig. 4). Currently, these building elements are:

- Walls (*IfcWall*, *IfcWallStandardCase*)
- Slabs (*IfcSlab* with *PredefinedType* undefined or set to *FLOOR* or *BASESLAB*)
- Roofs (*IfcRoof*, *IfcSlab* with *PredefinedType* set to *ROOF*)

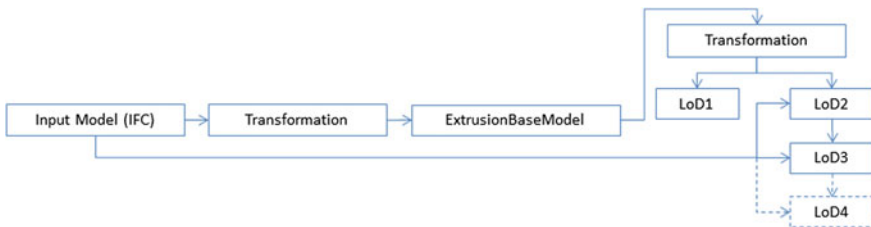


Fig. 2 Schematic overview of the generalization process

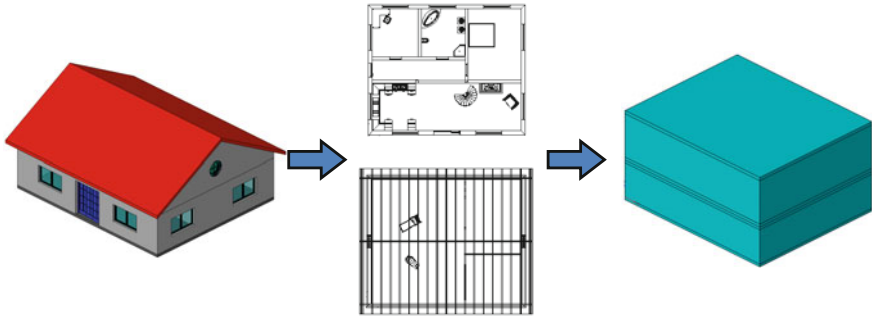


Fig. 3 Transformation from IFC to the `ExtrusionBaseModel`

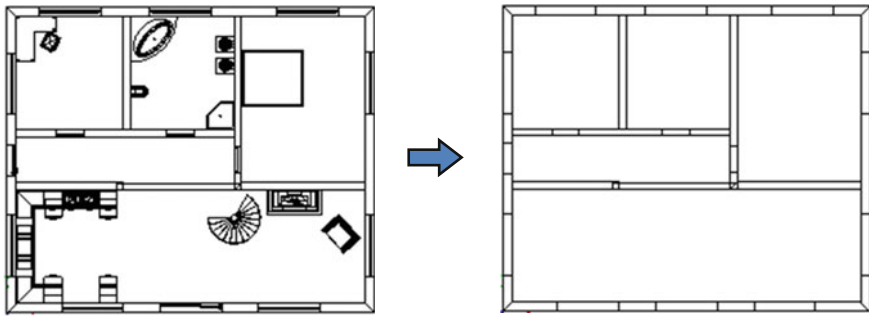


Fig. 4 Semantic filtering of IFC data (*left* original model; *right* only IFCSLAB, IFCWALL, IFCBEAM)

- Facades (`IfcCurtainWall`)
- Beams and columns (`IfcBeam`, `IfcColumn`), optionally taken into account.

In IFC, different representation types are allowed and have to be considered for the transformation process. To get a uniform geometry base for the whole process, each considered building element is additionally represented by its footprint geometry. This is derived by a vertical projection of the original geometry into the x - y plane of the model coordinate system $(x, y, z) \rightarrow (x, y, 0)$.

Based on these footprints, extrusion containers are calculated. Each container aggregates information connected with a specific building element type taking into account the building structure, if possible. An extrusion container includes relations to the original IFC building elements, minimum and maximum z coordinates, the footprint geometry of the aggregated building elements, and further relevant information for post-processing the data.

Additionally, extrusion containers for building storeys are generated. If possible, they are derived from the building structure and combined with information from horizontal slab elements.

After completing the container generation, a collection of different extrusion containers is prepared for further processes. At first, heuristic methods are used to identify building components like, e.g., balconies, dormers or inner courtyards. For the further generalization process, these structures may be eliminated or kept.

During a last refinement step, the collected extrusion containers are validated. Identified overlaps are eliminated and, depending on constraints, containers can be split or merged.

The final `ExtrusionBaseModel` is the basis for all further steps. Its geometry is stored with the relating `IfcBuilding` and `IfcBuildingStorey` instances of the IFC model as an extra geometric representation.

4.2 Generation of the LoD1 Model

Following the definition of CityGML (Gröger et al. 2012; Benner et al. 2013a), a LoD1 model is a rough approximation of the original building model represented in one vertical extrusion. In many cases, this is not sufficient to represent the exterior shell of a building. Especially for landmarks, the shape should represent the characteristics of such buildings.

Based on the `ExtrusionBaseModel`, different strategies are implemented for the LoD1 generalization process. Depending on the strategy, building footprints, wall footprints or slab footprints are used to determine one or more vertical extrusions for the final LoD1 model (see also Sect. 5.2).

The first strategy calculates one extrusion for the whole building. Thereby, all footprints of the relevant building elements are used. The second variant focuses on walls. In this case, footprints of walls on same levels and same heights are combined and extruded. In the third case, footprints of horizontal slabs are used to create the extrusion geometries.

Because the geometric representation of the `ExtrusionBaseModel` is very close to the requirements of a LoD1 model (see Fig. 5), the main task of this transformation step is to adjust the vertical extrusions for the requested generation strategy. Optionally, it is also possible to create the resulting LoD1 geometries by an explicit storey structure. This means that for each storey, an extra extrusion is generated even if the footprints of the storeys are identical.

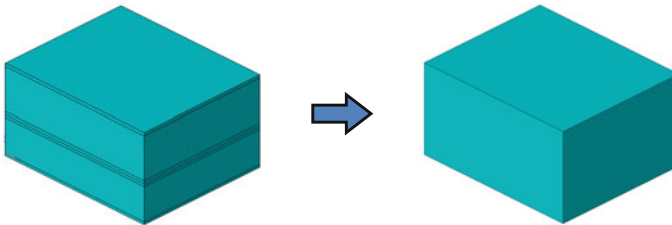


Fig. 5 Transformation `ExtrusionBaseModel` into a LoD1 model

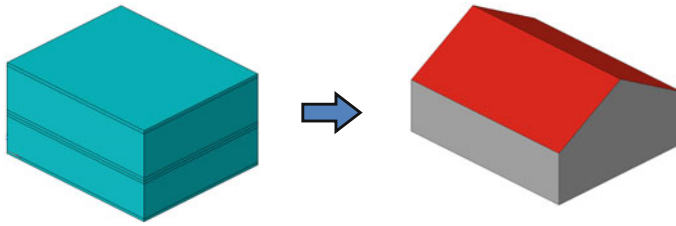


Fig. 6 Transformation `ExtrusionBaseModel` into a LoD2 model

4.3 Generation of the LoD2 Model

Compared to LoD1, the generation process for LoD2 is completely different. The basis is also the `ExtrusionBaseModel` but the generated outer contour of the building is much more detailed with a correct roof shape and a detailed classification of the outer boundary surfaces (see Fig. 6).

The first step is to assign the roof shape. An algorithm was developed to generate clipping planes for the extrusion containers of `ExtrusionBaseModel`, based on the original geometry of the IFC building elements `IfcRoof` and `IfcSlab` with `PredefinedType` set to `ROOF`. Supported geometry types in this process are extrusion and B-rep.

For B-rep geometries, all face normals are analyzed in order to identify upwards pointing faces. The outer polygons of these faces are transformed into bounded clipping planes.

For extrusion geometries, the procedure is different. Starting with the extrusion placement, the extrusion direction and its magnitude, the top plane of the extruded geometry can be calculated by a simple matrix operation. The boundary is derived from the extrusion profile, which is transformed into the plane.

In the second step, building elements are used for a semantic classification of the clipped extrusion geometries. For this, corresponding surfaces of IFC building elements and `ExtrusionBaseModel` objects are identified. In the classification mechanism, the following CityGML features are generated:

- `WallSurface`
- `OuterFloorSurface`
- `RoofSurface`
- `GroundSurface`
- `ClosureSurface`
- `BuildingInstallation`

While classifying the surfaces, an algorithm compares the distance of surfaces from IFC building elements to the generated surfaces of the `ExtrusionBaseModel`. The accuracy parameter `epsilon` for this distance test is adjustable, the default value it is set to is 50 mm. If the distance is smaller than `epsilon`, the corresponding surface is collected for further verifications. During this process,




Fig. 7 **a** IFC solid geometry, **b** CityGML roof surface, **c** subtraction of the roof surface with the top face of the IFC solid geometry, and **d** resulting geometry for roof overhangs

several faces of one building element, but also faces of different building elements can be found. All collected faces are compared in a second pass. In this pass, net area and the quantity of overlapping area, with corresponding surfaces of the *ExtrusionBaseMode* are checked to assign the correct type.

As an optional calculation step, the generation of roof overhangs can be initiated. The relevant geometry will be derived by a geometrical comparison of IFC roof elements with the created CityGML *RoofSurface*. By a projection of the CityGML *RoofSurface* on the IFC roof geometries, the overlapping parts are identified and separated by a geometric subtraction. For the CityGML model, these geometries are currently classified as *BuildingInstallation*. Figure 7 shows the steps for extracting roof overhangs.

4.4 Generation of the LoD3 Model

The transformation process from a LoD2 model to a LoD3 model mainly differs in applying voids for doors, windows, and openings and creating the appropriate elements (see Fig. 8). In this step, the *ExtrusionBaseModel* is no longer used.

This process is realized by interpreting the relations of IFC. Cutouts are not explicitly given in the IFC geometry representations, but defined as relations between building elements, voiding elements, and a door or window elements. The first relation (*IfcRelVoidsElement*) describes a Boolean subtraction between, e.g., a wall and an opening element. Without handling this relation, the wall is given by their gross volume. The second relation (*IfcRelFillsElement*) is to place a door or window element within the hole of the subtracted opening element.

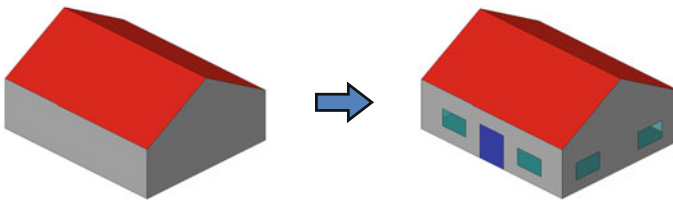


Fig. 8 Transformation of a LoD2 into a LoD3 model

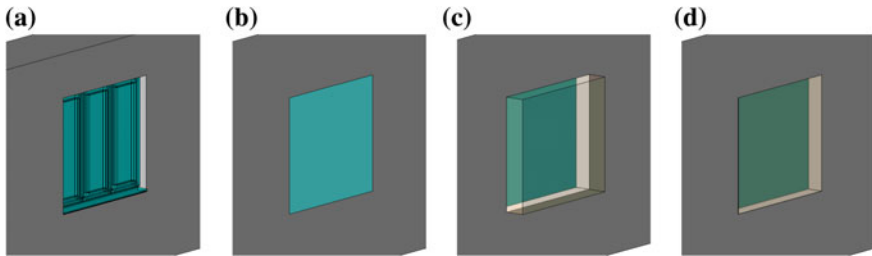


Fig. 9 **a** IFC wall with window element, **b** CityGML `WallSurface` with window element in wall plane, **c** CityGML `WallSurface` with window element at correct position and IFC opening element (transparent), and **d** Embrasure realized by clipping opening element at wall and window plane

Doors and windows in IFC can be represented geometrically in different ways. Either by an explicit geometric representation, or by parameters describing operation type, lining, and panel. For non-rectangular elements, additionally a 2D profile should be given to describe the outer contour of the door or window. If only the parameters are given, the resulting geometry has to be calculated. Within the generalization process, the best solution to control the geometric complexity of these elements is to interpret the parameters, if available. Otherwise the geometry will be approximated by a projection of the opening element on the corresponding surface of the building element.

Unlike IFC, the opening elements in CityGML do not represent an additional element, but are already subtracted from the corresponding boundary surface. The door and window elements are defined as sub elements of the boundary surface and are geometrically located within the boundary surface. Openings without a door or window have to be represented as a `ClosureSurface` and cannot be related to any boundary surface.

For doors and windows, it is sufficient to reduce their geometry by a surface. This is different for embrasures. For representing a detailed façade, it is important to have the detailed depth and contour of the embrasures. Similar to roof overhangs, it is possible to activate the embrasure generation optionally. This step is currently under development. Basis is the `IfcOpeningElement` and the simplified door or window elements, created in the previous step. Clipping planes are derived from the door or window elements and from the boundary surface, e.g., `WallSurface`. Performing clipping operations with the geometry of the `IfcOpeningElement` results in a solid (negative mold of the embrasure), filling the recess between door or window surface and top edge of the boundary surface. Hence, the planes' normals are known, unneeded faces can be identified, and the remaining faces have to be inverted. The whole process is shown in Fig. 9. Finally, the surfaces of the embrasure have to be defined by the type of the boundary surface.

5 Testing and Evaluation

The methodology described above is implemented as an early prototype in the software platform IFCEXplorer, which is developed at the Institute for Applied Computer Science at Karlsruhe Institute of Technology. The IFCEXplorer is a tool for visualization, analysis, transformation, and integration of spatial data from different applications by open standardized data formats (e.g. IFC, cityGML, gbXML). Different data models and application areas are supported and can be opened either based on files or via standardized OGC web services (e.g. Web Feature Service, Web Map Service). For analyzing the different data models, a wide range of checking functionalities is available. The implemented functionality ranges from semantic validation, checking correctness of attributes, to geometrical and mathematical checks. This is the basis for realization of the here described generalization process (Benner et al. 2013b).

In order to prove the concept, single-family houses were used and transformed. The generated LoD models are internally represented as CityGML models and can be exported as CityGML 2.0 instance documents.

Each model is presented by an image of the IFC model and three images of the transformed LoD1, LoD2, and LoD3 model. Furthermore, for each model, a table shows all elements with a geometric representation, the types of the geometric representations, and the total amount of faces used for rendering.

5.1 Building Example 1

Example 1 is a simple free-standing building consisting of basement, ground floor, and roof floor. The LoD1 is represented in one vertical extrusion and for LoD2 and LoD3 the `WallSurface` is combined on all floors (Fig. 10; Table 1).

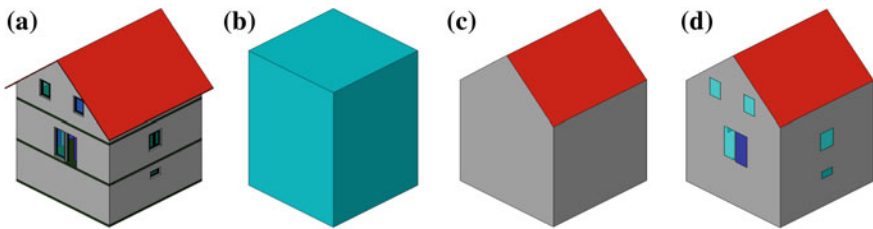


Fig. 10 Example 1: **a** IFC Model, **b** CityGML LoD1, **c** CityGML LoD2, and **d** CityGML LoD3

Table 1 Transformation results for building example 1

IFC			CityGML	LoD1	LoD2	LoD3
Entities/Features	IfcDoor	8	→	1	2	2
	IfcOpeningElement	23			4	4
	IfcRailing	1			1	1
	IfcSlab[Floor]	3			OuterFloorSurface	2
	IfcSlab[Roof]	2				12
	IfcSpace	10			Door	
	IfcStair	2				
	IfcWallStdCase	19			Windows	
	IfcWindow	12				
Geometry	B-rep	261		1	7	21
	Extrusion	78				
	SurfaceModel	13				
	Face	4,849		6	7	21

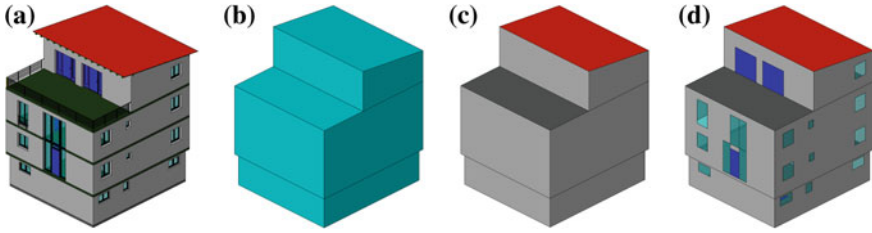


Fig. 11 “Anwenderhandbuch”: **a** IFC Model, **b** CityGML LoD1, **c** CityGML LoD2, **d** CityGML LoD3

5.2 Building Example 2

The second building example is an official building model from the German “Anwenderhandbuch” which is a guide to the interoperability of CAD data from buildingSMART. For the LoD1 generation, the characteristics of the building are preserved by using the wall footprint strategy described in the LoD1 transformation step. The final geometry is represented in three vertical extrusions. LoD2 and LoD3 are generated with the same options, for this reason the `WallSurface` on ground floor and first floor are combined.

Due to an error in the internal Boolean operations, two of the window elements in the LoD3 model are missing in the front façade. The window elements are identified and created in the CityGML instance document but the geometric representation is missing (Fig. 11; Table 2).

6 Summary and Outlook

In order to use architectural building models like IFC in other application domains like geospatial environments or energy calculation, a method for semantical and geometrical generalization of IFC models is introduced. As a first example of this process, the transformation from IFC to CityGML (LoD1–3) is explained and first results are shown.

The method is implemented as an early prototype in the software IFCEXplorer. The process is performed interactively and needs no further input. The results are immediately shown in the same document as the IFC model, which allows a direct comparison between the models. Tests have been carried out with simple single-family houses.

Next steps are implementing a prototype which can handle more complex buildings than single-family houses. This prototype will also include the consideration of overhanging parts of the building and the building’s interior.

Table 2 Transformation results for building example 2

Entities/Features	IFC		CityGML	LoD1	LoD2	LoD3
	IfcBeam	17	→	1	1	1
	IfcDoor	21				
	IfcOpeningElement	60				
	IfcRailing	8				
	IfcSlab[Baseslab]	1				
	IfcSlab[Floor]	3				
	IfcSlab[Roof]	2				
	IfcSpace	21				
	IfcStair	6				
	IfcWallStdCase	38				
	IfcWindow	36				
	B-rep Extrusion	1,089 126				
	Face	17,426				
Geometry			MultiSurface	1	16	56
			Face	16	16	56

With these experiences, the generalization process will be extended regarding other requirements for energy performance simulation. In this case, single-zone or multi-zones models will be created and exported to gbXML (2014).

References

- AIA (2013) Level of development specification version: 2013. Available at <http://bimforum.org/wp-content/uploads/2013/08/2013-LOD-Specification.pdf>. Accessed 2 July 2014
- Babic B, Nesic N, Miljkovic Z (2008) A review of automated feature recognition with rule-based pattern recognition. *Comput Ind* 59(4):321–337
- Baig SU, Rahmann AA (2013) A unified approach for 3D generalization of building models in CityGML. *Int Arch Photogrammetry, Remote Sens Spat Inf Sci* XL-4/W1:93–99
- Benner J, Geiger A, Gröger G, Häfele K-H, Löwner M-O (2013a) Enhanced LoD concepts for virtual 3D city models. In: 8th 3D geoinfo conference, Istanbul
- Benner J, Geiger A, Häfele K-H, Knüppel H (2013b) IFCExplorer—Ein Werkzeug für die Integration unterschiedlicher raumbezogener semantischer Daten. *Geoinformatik, Heidelberg*
- bSI (2014) Available at <http://www.buildingsmart.org/>. Accessed 25 June 2014
- van Berlo L (2011) Integration of BIM and GIS: the development of the CityGML GeoBIM extension. *Advances in 3D Geo-Information Sciences*. Springer, Berlin
- Cheng J, Deng Y, Du Q (2013) Mapping between BIM models and 3D GIS city models of different levels of detail. In: 13th international conference on construction applications of virtual reality, London, 30–31 Oct 2013
- Cox S, Daisey P, Lake R, Portele C, Whiteside A (2004) OpenGIS® geography markup language (GML) implementation specification, Version: 3.1.1, OGC 03-105r1. Open Geospatial Consortium
- Donkers, S. (2013) Automatic generation of CityGML LoD3 building models from IFC models. MSc thesis, Delft University of Technology
- El-Mekawy M, Östman A, Hijazi I (2012) An evaluation of IFC-CityGML unidirectional conversion. *Int J Adv Comput Sci Appl* 3(5):2012
- Eastman CM (1999) *Building product models: computer environments supporting design and construction*. CRC Press, Boca Raton
- Fan H, Meng L (2012) A three-step approach of simplifying 3D buildings modeled by CityGML. *Int J Geogr Inf Sci* 26(6):1091–1107
- gbXML (2014) Available at <http://www.gbxml.org/>. Accessed 25 June 2014
- Gröger G, Kolbe TH, Nagel C, Häfele K-H (2012) OGC city geography markup language (CityGML) encoding standard, Version 2.0, OGC doc no. 12-019. Open Geospatial Consortium
- ICA—International Cartographic Association (1973) *Multilingual dictionary of technical terms in cartography*. Franz Steiner Verlag, Stuttgart
- ISO 10303-11:2004 (2004) *Industrial automation systems and integration—product data representation and exchange—part 11: description methods: The EXPRESS language reference manual*
- ISO 10303-21:2002 (2002) *Industrial automation systems and integration—product data representation and exchange—part 21: implementation methods: clear text encoding of the exchange structure*
- ISO 10303-28:2007 (2007) *Industrial automation systems and integration—product data representation and exchange—part 28: implementation methods: XML representations of EXPRESS schemas and data, using XML schemas*
- ISO 16739:2013 (2013) *Industry foundation classes (IFC) for data sharing in the construction and facility management industries*

- ISO 19107:2003 (2003) Geographic information—spatial schema
- Kada M (2002) Automatic generalization of 3D building models. *Int Arch Photogrammetry, Remote Sens Spat Inf Sci (Part 4)* 34: 243–248
- Kada M (2006) 3D building generalization based on half-space modeling. In: *Proceedings of the ISPRS workshop on multiple representation and interoperability of spatial data*, Hannover
- Liebich T (2007) Industry foundation classes—IFC2×3 documentation
- Luebke D, Reddy M, Cohen JD, Varshney A, Watson B, Huebner R (2003) *Level of detail for 3D graphics*. Morgan Kaufmann, San Francisco
- Meng L, Forberg A (2006) 3D building generalization. In: Mackaness W, Ruas A, Sarjakoski T (eds) *Challenges in the portrayal of geographic information: issues of generalisation and multi scale representation*. Elsevier Ltd, Amsterdam, pp 211–232
- Nagel C (2006) *Ableitung verschiedener Detaillierungsstufen von IFC Gebäudemodellen*. MSc thesis, University of Applied Science Karlsruhe, Research Center Karlsruhe
- Nagel C, Häfele K-H (2007) *Generierung von 3D-Stadtmodellen auf basis des IFC-Gebäude-modells*. Entwicklerforum Geoinformatikstechnik 2007
- Sester M (2007) 3D visualization and generalization. In: *Proceedings of the 51st photogrammetric week*, Stuttgart, 3–7 Sept 2007, pp 285–295
- Thakura A, Banerjee AG, Gupta SK (2009) A survey of CAD model simplification techniques for physics-based simulation applications. *Comput Aided Des* 41(2):65–80
- Thiemann F, Sester M (2004) Segmentation of buildings for 3D-generalisation. In: *Proceedings of the 7th ICA workshop on generalisation and multiple representation*, Leicester, 20–21 Aug 2004 (on CD-ROM)

3D Geoinformation Science

The Selected Papers of the 3D GeoInfo 2014

Breunig, M.; Al-Doori, M.; Butwilowski, E.; Kuper, P.V.;

Benner, J.; Haefele, K.H. (Eds.)

2015, VI, 258 p. 138 illus., 113 illus. in color., Hardcover

ISBN: 978-3-319-12180-2