

Chapter 2

Investigating Long-Term Subsidence at Medicine Lake Volcano, CA, Using Multi Temporal InSAR

Abstract Long-term volcanic subsidence provides insight into inter-eruptive processes, which comprise the longest portion of the eruptive cycle. Ground based geodetic surveys of Medicine Lake Volcano (MLV), northern CA, document subsidence at rates of ~ -10 mm/yr between 1954 and 2004. The long observation period plus the duration and stable magnitude of this signal presents an ideal opportunity to study long-term volcanic deformation, but this first requires accurate knowledge of the geometry and magnitude of the source. Best-fitting analytical source models to past leveling and GPS datasets show conflicting source parameters - primarily the model depth. To overcome this, we combine multiple tracks of InSAR data, each with a different look angle, to improve upon the spatial resolution of ground based measurements. We compare the results from InSAR to those of past geodetic studies, extending the geodetic record to 2011 and demonstrating that subsidence at MLV continues at ~ -10 mm/yr. Using geophysical inversions, we obtain the best-fitting analytical source model - a sill located at 9–10 km depth beneath the caldera. This model geometry is similar to those of past studies, providing a good fit to the high spatial density of InSAR measurements, whilst accounting for the high ratio of vertical to horizontal deformation derived from InSAR and recorded by existing leveling and GPS datasets. We discuss possible causes of subsidence and show that this model supports the hypothesis that deformation at MLV is driven by tectonic extension, gravitational loading, plus a component of volume loss at depth, most likely due to cooling and crystallisation within the intrusive complex that underlies the edifice. Past InSAR surveys at MLV, and throughout the Cascades, are of variable success due to dense vegetation, snow cover and atmospheric artefacts. In this study, we demonstrate how InSAR may be successfully used in this setting by applying a suite of multi temporal analysis methods that account for atmospheric and orbital noise sources. These methods include: a stacking strategy based upon the noise characteristics of each dataset; pixel-wise rate-map formation (π -RATE); and persistent scatterer InSAR (StaMPS).

2.1 Introduction

Medicine Lake Volcano (MLV), northern California, is one of several Cascade volcanoes known to have exhibited ground deformation in recent years. The first leveling measurements at MLV were made in 1954 (Dzurisin et al. 1991, 2002) and, with the addition of campaign GPS surveys (Poland et al. 2006), comprise a geodetic record that spans 50 years. Few volcanoes have such long geodetic histories, but what is most unique about MLV is that deformation has been recorded at a constant rate of ~ -10 mm/yr since measurements began.

Past geodetic surveys provide an extensive history of ground deformation, with leveling measurements providing good constraints upon the vertical component of deformation, and GPS measurements best constraining horizontal displacements (Poland et al. 2006). However, the temporal and spatial resolution of measurements is limited (Fig. 2.1) and there are discrepancies between the best fitting analytical models to these past datasets. In this study we use measurements from Interferometric Synthetic Aperture Radar (InSAR), which are made at a much higher spatial density than ground based surveys. The side-looking nature of InSAR satellites means that measurements contain a component of both horizontal and vertical motion in the line of sight (LOS) of the satellite. By combining data acquired from multiple viewing geometries, InSAR measurements have the potential to better constrain both horizontal and vertical deformation fields at MLV (Wright et al. 2004b), in addition to providing measurements at a higher temporal and spatial resolution than past ground-based studies.

InSAR is a frequently used volcano monitoring tool, providing measurements of ground deformation in regions both with and without other geodetic equipment (e.g. Sparks et al. 2012; Pyle et al. 2013; Lu and Dzurisin 2014). For regions that contain numerous volcanoes, such as the Andes or Central America, InSAR may be used to carry out large-scale deformation surveys without the expense or risks associated with deploying equipment on the ground (Biggs et al. 2014). However, as is the case in many volcanic settings, the application of InSAR at MLV and throughout the Cascades has been limited by incoherence and noise.

In recent years, various multi temporal analysis methods have been developed to improve the use of InSAR in challenging conditions, and are now becoming widely used due to their accessibility online. This includes those that assume the signal remains constant over time such as: stacking (e.g. de Zeeuw-van Dalssen et al. 2012), rate-map formation (e.g. Poly-Interferogram Rate and Time-series Estimator: π -RATE; Biggs et al. 2007; Elliott et al. 2008; Wang et al. 2009, 2012), and persistent scatterer InSAR (Ferretti et al. 2001; Hooper et al. 2004, 2007); and those designed to investigate the temporal evolution of deformation, such as the small baseline subset algorithm (Berardino et al. 2002), and persistent scatterer InSAR time-series (Hooper et al. 2004, 2007). We test the application of multi temporal analysis methods in the Cascades using multiple sets of InSAR data acquired at MLV, where the apparent steady state of ground deformation and abundance of geodetic data presents

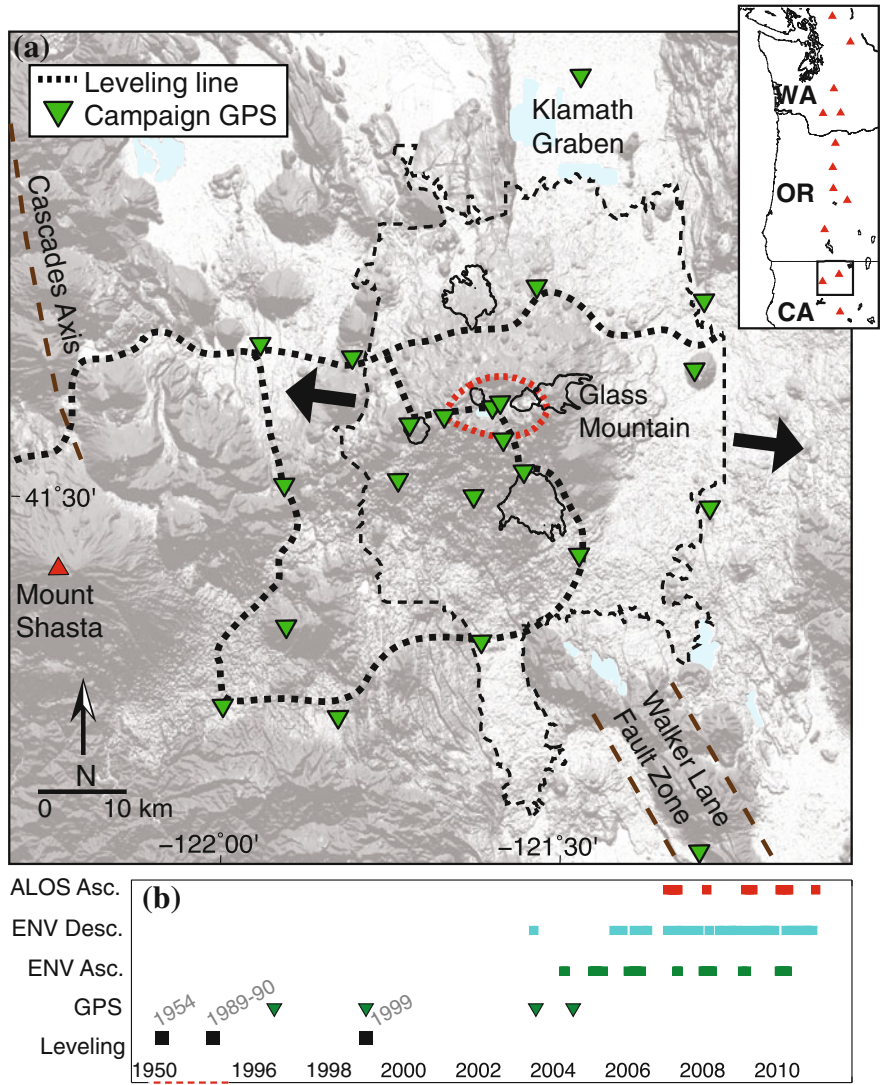


Fig. 2.1 **a** Map of Medicine Lake Volcano including main structural features and direction of tectonic extension after Donnelly-Nolan et al. (2008), plus U.S. Geological Survey geodetic networks. The extent of MLV lavas and major Holocene lava flows are shown by *dashed* and *solid black lines* respectively (Donnelly-Nolan 2010). The summit caldera is shown by the *dotted red line*. The site of the last eruption, 1 ka at Glass Mountain, is labelled. These features are overlain on a 30 m SRTM digital elevation model. *Inset* map shows the location of the main map in relation to the other Cascade volcanoes. **b** Timeline showing the temporal resolution of geodetic datasets at MLV. Note the discontinuous time axis. Leveling measurements are labelled with dates and are from Dzurisin et al. (2002). GPS measurements are from Poland et al. (2006) (color figure online)

an ideal opportunity to assess the application of techniques that assume a linear rate of deformation.

The results of multi temporal InSAR analysis provide improved constraints upon the deformation field at MLV. Comparing the results from InSAR to those of past geodetic studies, we extend the geodetic record to 2011 and determine whether subsidence at MLV continues at historical rates. The improved spatial resolution of InSAR measurements is then used to constrain analytical models of the source of deformation.

2.1.1 Tectonic and Geological Setting

Located east of the main Cascades axis on the Modoc Plateau, MLV is considered to be a rear-arc volcano at the southern end of the Cascades Volcanic Arc (Donnelly-Nolan et al. 2008) (Fig. 2.1a). This region marks the interaction between subduction along the Cascadia subduction zone and extension of the Basin and Range province (e.g. Hildreth 2007), both of which control the structure and behaviour of MLV. The edifice marks a kink in regional fault orientations (Blakely et al. 1997) and zones of crustal weakness including a lineament of vents that extend SW to Mount Shasta; the NW extension of the Walker Lane fault zone; and the southern extension of the Klamath Graben (Donnelly-Nolan et al. 2008) (Fig. 2.1a).

The total area covered by MLV lavas is $>2000\text{ km}^2$ - about 10 times the area of Mount St Helens (Donnelly-Nolan 1988) - and the total erupted volume is estimated to be $\sim 600\text{ km}^3$ (Heiken 1978) making MLV the largest volcano by volume in the Cascades (e.g. Donnelly-Nolan 1988; Hildreth 2007). Despite its large volume, MLV is a broad, inconspicuous, volcano with an E-W orientated, $7 \times 12\text{ km}$ summit caldera (Fig. 2.1a).

Volcanism at MLV began about half a million years ago (Donnelly-Nolan and Lanphere 2005) and the volcano has one of the highest Holocene eruption rates in the Cascades, with nine eruptions having occurred in the last 5.2 ka (Donnelly-Nolan et al. 2008). Magmatic products show signatures of both subduction and extension, with hydrous calcalkaline basalts and dry high-alumina olivine tholeiite erupted close together in space and time (Donnelly-Nolan 1988). The most recent eruption at MLV was $\sim 1\text{ ka}$ at Glass Mountain on the eastern edge of the caldera (Fig. 2.1a).

2.1.2 Previous Studies of Ground Deformation at Medicine Lake Volcano

The U.S. Geological Survey has made repeated measurements of two geodetic networks covering MLV and nearby Mount Shasta: a leveling line and a campaign GPS network (Fig. 2.1b). The first leveling survey of the MLV/Mount Shasta region took

place in 1954. Smaller scale surveys were carried out in 1988 in response to a small earthquake swarm, and in 1989–1990, the U.S. Geological Survey Volcano Hazards Program remeasured the MLV circuit (Dzurisin et al. 1991, 2002). These surveys revealed volcano wide subsidence and an additional survey of the summit region in 1999 confirmed subsidence at a rate of -8.6 ± 0.9 mm/yr (Dzurisin et al. 2002).

Campaign GPS surveys of the volcano took place in 1996, 1999, 2003 and 2004 (Fig. 2.1b). The horizontal measurements provided by these GPS campaigns have been essential in discriminating between possible source geometries, as they reveal that deformation at MLV is almost all vertical, with very small horizontal displacements (Poland et al. 2006).

Poland et al. (2006) present InSAR results in conjunction with their GPS study, summing three temporally consecutive ERS-1/2 interferograms to produce a stack spanning 1993–2000. However, Poland et al. (2006) found that ERS-1/2 data exhibit poor coherence in the caldera region, and offer limited additional information to GPS measurements.

2.2 InSAR Data and Interferogram Formation

To address the application of InSAR at MLV, we use the significant archive of InSAR data covering the volcano acquired between 1993 and 2011 by the European Space Agency C-band satellites ERS-1/2 and ENVISAT, plus L-band data from the JAXA satellite ALOS. In total we use: 26 acquisitions from ERS-1/2 descending track 342; 32 acquisitions from ENVISAT ascending track 163; 32 acquisitions from ENVISAT descending track 342; and 15 acquisitions from ALOS ascending track 220 (Fig. 2.1b). Both C-band satellites have a repeat interval of 35 days but offer variable coverage throughout their operation time. ALOS data span 2007–2011 with a repeat time of 46 days, providing useful constraint on deformation in more recent years.

Interferograms were processed using the JPL/Caltech ROI_PAC software (Rosen et al. 2004), filtered using a power spectrum filter (Goldstein and Werner 1998) and unwrapped using a branch cut algorithm (Goldstein and Werner 1988). Topography was removed using a 30 m SRTM DEM (Farr and Kobrick 2000). We guide interferogram formation using time versus perpendicular baseline plots to identify image pairs with short temporal and/or spatial baselines (Fig. 2.9 in the Appendix). To improve the coherence of C-band interferograms we made alterations to the processing sequence including additional filtering steps, unwrapping manually using bridges to connect isolated coherent patches and increasing the number of looks (coarsening resolution to approx. 300 m) (e.g. Goldstein and Werner 1988; Jónsson et al. 2002). The final set of C-band interferograms is produced by unwrapping the phase at 16 looks, allowing us to maximise coherence without over smoothing the signal.

2.2.1 Coherence

The use of InSAR across the Cascades has been limited by incoherence. Coherence is quantified in terms of interferometric correlation, γ , measured across a 3×3 pixel window. For stable pixels, $\gamma = 1$, and for pixels that have independent backscattering phases, $\gamma = 0$ (Seymour and Cumming 1994; Hanssen 2001). We use a threshold of $\gamma = 0.1$, as this produces a smooth phase field in unwrapping whilst maximising the number of coherent pixels.

At MLV, incoherence is mostly caused by snow, and dense vegetation, which cause the properties of scatterers to vary over time (temporal decorrelation). Geometrical decorrelation may also result from steep topography, such as the caldera walls. Throughout all datasets we observe good coherence in the arid region surrounding MLV. Pine trees across the flanks and caldera of the volcano significantly reduce the coherence of C-Band data (e.g. Fig. 2.10 in the Appendix), but are less detrimental to L-Band data, as the longer radar wavelength is better able to penetrate vegetation (Rosen et al. 1996; Massonnet et al. 1996; Ebmeier et al. 2013b; Lu and Dzurisin 2014). These regions of high elevations are also affected by snow cover between November and May, which impacts all datasets.

We quantitatively assess the coherence of each dataset by calculating the percentage of coherent pixels in a $0.2^\circ \times 0.1^\circ$ box surrounding the summit caldera. We then rank the interferograms by coherence and plot a trade-off curve of interferogram number versus coherence (Fig. 2.2b). L-Band ALOS data exhibits the most complete coherence (more than 90 % interferograms are $>30\%$ coherent at the summit), whereas ENVISAT data shows much poorer coherence, with fewer than 45 % of ascending track interferograms and 35 % of descending track interferograms exceeding 30 % coherence at the summit. As was the case for the study of Poland et al. (2006), we find that the coherence of ERS-1/2 data at MLV is extremely poor, with fewer than 30 % of interferograms exceeding 25 % coherence at the summit. In addition to the causes of geometrical and temporal decorrelation highlighted above, such poor coherence can also be attributed to instrument limitations (e.g. Zebker and Villasenor 1992; Hanssen 2001). As the operation time of ERS-1/2 is also covered by leveling and GPS surveys we chose to discard this dataset.

2.2.2 Sources of Noise

Interferometric phase is not just a product of ground deformation but also contains several noise terms that compromise accuracy. The LOS displacement (d_{LOS}) may be split into (a) the phase contribution from the difference in ground deformation between acquisitions t_1 and t_2 ($\Delta\phi_{def}$), (b) the difference in the orbital contribution between acquisitions t_1 and t_2 ($\Delta\phi_{orb}$) (see Sect. 2.2.2), (c) the difference in the atmospheric delay between acquisitions t_1 and t_2 ($\Delta\phi_{atm}$) (see Sect. 2.2.2), and (d) the phase contribution due to other noise (ϕ_{error}):

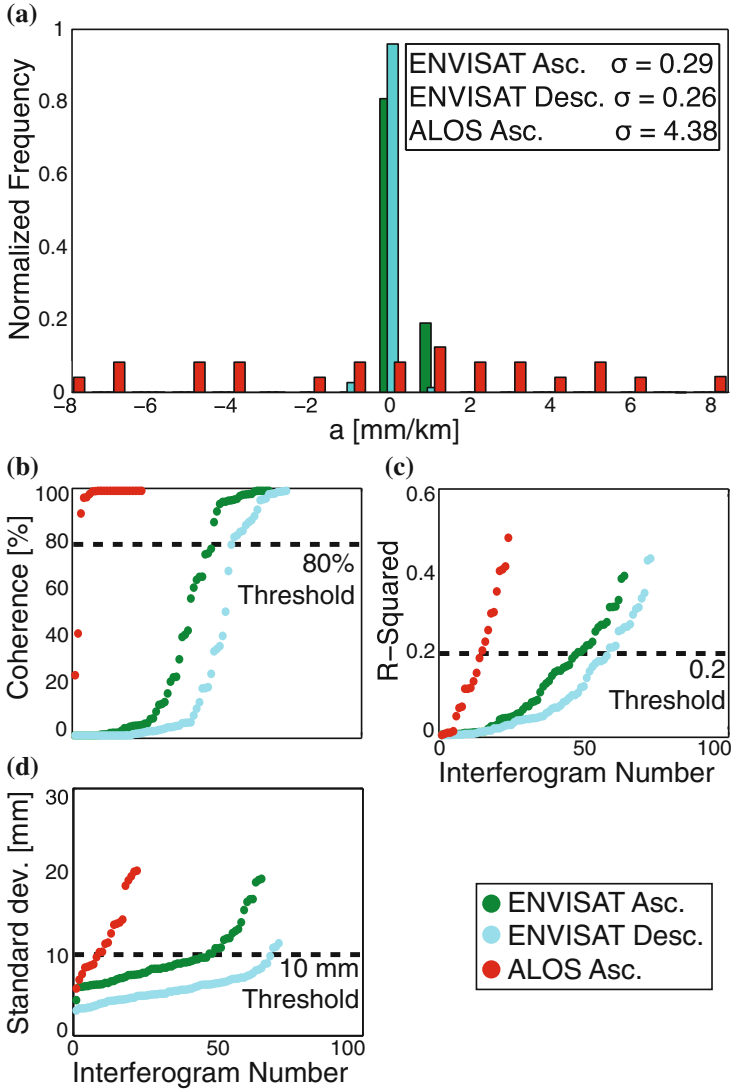


Fig. 2.2 Summary of the coherence and noise of datasets used. **a** Histogram showing the distribution of the orbital parameter a from Eq. 2.2 for each dataset. ALOS data has a wider distribution of orbital parameters than ENVISAT as seen by the larger standard deviation. **b–d** show trade-off curves summarising the coherence and atmospheric noise of each dataset. Marked thresholds are those used in noise based stacking described in Sect. 2.3.1. **b** Interferograms are ranked by the percentage of coherent pixels in a $0.2^\circ \times 0.1^\circ$ box surrounding the summit caldera. **c** Interferograms are ranked by the r^2 value found by plotting elevation versus phase of each interferogram pixel. **d** Interferograms are ranked by the value of standard deviation found using Eq. 2.3

Table 2.1 Datasets used in this study and associated noise properties described in Sect 2.2. *Top* individual interferograms. *Bottom* results of π -RATE

Dataset	No. of scenes	Repeat time	Coherence ^a (%)	Orbital parameters ^b			Covariance ^c		r^2 ^d
				a	b	c	$\tilde{\sigma}$	$\tilde{\alpha}$	
ENVISAT ascending	32	35 days	41	0.29	0.21	2.8×10^4	7.3	16	0.19
ENVISAT descending	32	35 days	30	0.26	0.24	2.3×10^4	5.8	8.3	0.055
ALOS ascending	15	46 days	90	4.38	1.88	2.5×10^5	10.8	11.2	0.058
ENVISAT ascending			100	0.0025	-0.0007	-0.97	2.96	2.25	2.5×10^{-4}
ENVISAT descending			62	0.0032	-0.0013	-0.81	3.0	6.46	160×10^{-4}
ALOS ascending			93	0.0003	0.0011	-1.23	6.8	1.65	4.7×10^{-4}

^aPercentage of coherent pixels within a $0.2^\circ \times 0.1^\circ$ box surrounding the summit caldera
^bStandard deviations of parameters a, b and c (Eq 2.2) describing orbital contribution to phase
^cMedian values of σ and α (Eq 2.3) describing spatial correlation of the data
^dMean r^2 value describing the correlation between pixel phase and elevation

$$d_{LOS} = -\frac{4\pi}{\lambda}(\Delta\phi_{def} + \Delta\phi_{orb} + \Delta\phi_{atm} + \phi_{error}). \quad (2.1)$$

In the following, we analyse the orbital and atmospheric contributions to each dataset, with parameters summarised in Table 2.1.

Orbital Errors

Each satellite acquisition is made from a different location above the ground due to forces that act upon the satellite trajectory. Precise orbits are used to determine the exact separation of the satellite orbits, but not all forces can be fully modelled. Our knowledge of the orbital parameters is therefore imperfect, resulting in a long wavelength orbital error that remains in the interferogram (Fig. 2.10 in the Appendix) (Zebker et al. 1994). As the unmodeled accelerations are small, the error changes slowly in the along track direction (Hanssen 2001) and most authors approximate the orbital contribution using a first or second order 2-D polynomial (Biggs et al. 2007; Gourmelen et al. 2010). Accordingly, we investigate the orbital phase contribution to each dataset by finding the perturbation to the orbital parameters which best matches the observed phase using a linear empirical approximation of the form:

$$z = ax + by + c, \quad (2.2)$$

where $[x, y]$ are the pixel coordinates, a and b are gradient parameters, and c is the intercept. We mask the edifice and solve for a , b and c for each interferogram using a linear least squares inversion. For all datasets we find that both x - and y -gradients have a roughly normal distribution centred on zero (Fig. 2.2a). Using the standard deviation of the orbital parameters we find that the orbital contributions are greater for ALOS data than for ENVISAT data (Fig. 2.2a). This is in agreement with the large perpendicular baselines observed between consecutive ALOS acquisitions when constructing time versus baseline plots (see Fig. 2.9 in the Appendix).

Atmospheric Errors

The atmospheric contribution to the phase results from changes in pressure, temperature and water vapour between acquisitions, as each of these factors controls the effective path length between the satellite and the ground. The most variable of these factors is tropospheric water vapour - vertically stratified water vapour causes a phase contribution that tends to correlate with topography, whereas turbulent water vapour causes 3D heterogeneities in refractivity that manifest as spatially correlated patterns in interferograms (Hanssen 2001). From visual inspection of interferograms at MLV, we find that the main source of atmospheric noise in this setting is turbulent water vapour across the Modoc Plateau, resulting in phase heterogeneities that do not correlate with topography (Fig. 2.10 in the Appendix).

We investigate the effects of water vapour stratification by looking at the relation between elevation and phase in each dataset. We begin by removing an orbital phase ramp (as described in Sect. 2.2.2), masking the edifice and identifying pixels that are coherent in all interferograms. We then use an SRTM 30 m DEM to plot the

elevation versus phase of each pixel in the interferogram. We then perform a linear regression to obtain the r^2 value, using this as a measure of the correlation between elevation and phase - interferograms with $r^2 > 0.2$ are deemed to be dominated by non-turbulent atmospheric noise. Using the values of r^2 , we rank the interferograms in each dataset and plot a trade-off curve of interferogram number versus r^2 . As MLV is of relatively low relief compared to the surrounding basin (~ 1300 m), we find that most interferograms do not show a strong relation between elevation and phase, and have $r^2 < 0.2$ (Fig. 2.2c).

In reality, interferograms are highly spatially correlated (Hanssen 2001; Jónsson et al. 2002; Lohman and Simons 2005), and to account for spatial correlation of the signal, we use an exponentially-decaying form of covariance function to approximate the overall atmospheric phase contribution to each interferogram (Hanssen 2001). We assume that the statistical properties of the atmosphere are radially symmetric (Hanssen 2001) and use a 1D covariance function of the form:

$$c_{jk} = \sigma^2 e^{(-d_{jk}\alpha)}, \quad (2.3)$$

where c_{jk} is the covariance between pixels j and k , σ^2 is the variance, d_{jk} is the distance between the pixels and α is the inverse of the e-folding wavelength - a measure of the spatial correlation of the signal.

We observe median values of $\sigma = 7.3$ mm and $\alpha = 16.0$ km for ENVISAT ascending data, $\sigma = 5.8$ mm and $\alpha = 8.3$ km for ENVISAT descending data (Fig. 2.3), and $\sigma = 10.8$ mm and $\alpha = 11.2$ km for ALOS ascending data, all of which are comparable to the studies of Biggs et al. (2007) in Alaska ($\tilde{\sigma} = 7.5$ mm and $\tilde{\alpha} = 12.3$ km) and Lyons and Sandwell (2003) in California ($\tilde{\sigma} = 8.13$ mm).

We use the values of σ^2 to rank the interferograms in each dataset by phase standard deviation (σ), plotting a trade-off curve of interferogram number versus standard deviation. We find that all datasets have a similar distribution of standard deviation: the majority of interferograms have values < 10 mm, with standard deviation increasing linearly until the kink in the trade-off curve, at which point we reach interferograms with much higher levels of noise (Fig. 2.2d).

Both water vapour stratification and turbulence are more significant in regions of significant topography (e.g. Chaussard et al. 2013). This is shown by Ebmeier et al. (2013b), who derive a relation between the relief of the edifice and RMS variation in range change across the summit, using examples from volcanoes in Central America. According to this relation, the relief of MLV compared to the surrounding plateau (~ 1300 m) would result in ~ 35 mm RMS range change variation. This is ~ 3.5 times larger than the amount of deformation we expect to observe each year at the rates obtained from leveling and GPS, emphasising the importance of using multi temporal methods in this setting.

Numerous studies have developed techniques for reducing the effects of atmospheric noise including: calibration of the signal with an external data source such as GPS (e.g. Li et al. 2006b); the use of weather models (e.g. Foster et al. 2006; Doin et al. 2009; Wadge et al. 2010; Chap. 3); and those based upon the statistical information contained within the interferograms themselves, such as the correlation

of phase with topography (e.g. Elliott et al. 2008). We take this statistical approach and use three multi temporal techniques each of which employs statistical information within the interferograms to reduce the effects of atmospheric noise.

2.3 InSAR Methods

Various analysis techniques have been developed to improve the coherence and signal-to-noise ratio of InSAR data in problematic settings. Past geodetic studies at MLV suggest that deformation is occurring at a constant rate (Dzurisin et al. 2002), and as such we test three techniques that each assume the deformation rate is linear: stacking, rate-map formation (π -RATE-Poly-Interferogram Rate and Time-Series Estimator: Biggs et al. 2007), and the Stanford Method for Persistent Scatterers (StaMPS: Hooper et al. 2007). Our choice of these techniques is also motivated by the accessibility of the software, as both π -RATE and StaMPS are available online with an element of user support. Each technique has a different approach to combining interferograms and minimising the effects of noise; by identifying common features between the results we are able to better determine the extent and magnitude of the deformation field.

2.3.1 *Stacking*

A common approach to increasing the signal-to-noise ratio of an InSAR dataset is combining multiple interferograms by stacking. This technique has been used elsewhere in the Cascades at Mount St. Helens, WA (Poland and Lu 2008), Three Sisters, OR (Riddick and Schmidt 2011) and previously at MLV (Poland et al. 2006). This simple method assumes that the signal within the interferograms accumulates at a constant rate whilst the noise is random. By adding together N interferograms of equal duration, the signal has a magnitude N times bigger than that of an individual interferogram, whereas the noise is only \sqrt{N} times larger (Biggs et al. 2007).

Stacking methods can often be further improved by stacking chains of interferograms (e.g. Johanson and Bürgmann 2005; Biggs et al. 2007), where the slave image of one interferogram is the master image of the next. In this approach, the noise contribution from the slave image of the first interferogram will be cancelled when it is used as the master image of the second interferogram, until the remaining noise contribution is due only to the first and last acquisitions within the chain. This is beneficial in cases when short duration interferograms are significantly more coherent than longer duration interferograms. This is not the case for the datasets used here, and we find that chain stacking introduces many small unwrapping errors that are of the same magnitude as the subsidence signal across the caldera or, in the case of ALOS, errors due to large perpendicular baselines between consecutive satellite acquisitions.

Noise Based Data Selection for Stacking

Due to the extent of incoherence and phase heterogeneities caused by atmospheric errors, we adopt a stacking strategy designed to optimise the trade-off between the number of interferograms in each stack and the levels of atmospheric noise. This approach is based upon the analysis of coherence and noise sources presented in Sect. 2.2.

The main limitation of stacking is that it is only applicable to pixels that are coherent in all interferograms. To combat this we remove any interferograms with $<80\%$ coherent pixels in a $0.2^\circ \times 0.1^\circ$ box surrounding the summit caldera. This coherence threshold is selected through a process of trial and error. We begin with a lower value, resulting in poorer coherence when we sum all remaining interferograms, and increase this value until we achieve a minimum of $\sim 30\%$ coherence when summing together all remaining interferograms. The result of this step is a smaller but more coherent dataset (Fig. 2.2b).

As the primary cause of atmospheric errors at MLV is atmospheric turbulence, the next step is to use phase variance analysis to remove interferograms that are dominated by large magnitude phase heterogeneities. When ranking the interferograms by phase standard deviation in Sect. 2.2.2, we identified a trade-off between the number of interferograms and the maximum standard deviation: including many interferograms increases the maximum standard deviation, whereas including few interferograms reduces the maximum standard deviation but also reduces the temporal coverage of the stack (Fig. 2.2d). We select a threshold standard deviation to optimise the stack using linear regression to identify the kink in the trade-off curve of each dataset. We perform separate linear regressions to the first and last 20% of data points in each dataset and use the intersection of these linear regressions to mark a standard deviation threshold. Applying this method to each dataset we find that a value of 10 mm provides a good fit to both ALOS and ENVISAT data (Fig. 2.2d).

The final stage of data selection is designed to minimise the dependence of phase upon topography caused by atmospheric stratification. As discussed previously, most interferograms do not exhibit a strong correlation between elevation and phase ($r^2 > 0.2$) (Fig. 2.2c). We therefore set a threshold of $r^2 = 0.2$, only removing a small set of interferograms with larger r^2 values.

The final stack for each dataset is produced by referencing interferograms to a far field region to account for different starting points used in phase unwrapping. We sum the phase at each pixel, divide by the total duration to calculate the rate at each pixel, and finally remove a linear phase ramp to account for the orbital phase contribution. For robustness we use a bootstrap approach to ensure that no single interferogram dominates the final stack. To do this we sequentially remove interferograms from the stack, checking that the maximum LOS displacement remains within 1.5σ of that for the final stack.

In addition to stacking pixels that are coherent in all interferograms, we also test stacks of pixels that are coherent in a certain percentage of interferograms. However, testing different thresholds, we find that this approach is not robust and

results in noisier pixel values that are sensitive to the inclusion or exclusion of single interferograms.

2.3.2 *Poly-Interferogram Rate and Time-Series Estimator (π -RATE)*

Whereas the stacking methods described above only retain information from pixels that are coherent in all interferograms, Poly-Interferogram Rate And Time-series Estimator (π -RATE) employs a pixel-wise approach to calculate deformation rates at pixels that are coherent in different numbers of interferograms. This ensures that useful information about the magnitude and spatial extent of the deformation field is not lost. This advanced stacking approach originates from the multi interferogram method proposed by Biggs et al. (2007), with further development by Elliott et al. (2008) and Wang et al. (2009). The technique has been very successful in measuring fault related processes in regions such as Tibet (e.g. Wang et al. 2009; Wang and Wright 2012; Garthwaite et al. 2013), but has not previously been applied to volcanic datasets.

Unlike the stacking strategy outlined above, π -RATE corrects for sources of noise using networked corrections rather than removing noisy interferograms. In this approach, constraints from many interferograms are used to calculate the noise contribution at each acquisition rather than at each interferogram (Biggs et al. 2007; Wang et al. 2009). Networked corrections are used to correct orbital errors and topographically-correlated atmospheric errors, which are assumed to vary linearly with height as a first-order approximation (Elliott et al. 2008).

π -RATE formally accounts for the error at each pixel using an appropriate variance-covariance matrix, Σ . This contains estimates of spatially correlated noise from the covariance function described in Eq. 2.3, whilst considering the temporal covariance between interferograms arising from common master or slave dates. The final stack is produced by solving for the best fitting LOS displacement rate at each pixel, r_{LOS} using a pixel-wise linear least squares inversion of the form:

$$\Sigma^{-1}T = \Sigma^{-1}r_{LOS}P, \quad (2.4)$$

where T is the duration of each interferogram coherent at that pixel and P is the phase of each interferogram. To improve computation time we downsample the interferograms, testing downsampling factors between 1 and 10. We choose a downsampling factor of 5, optimising the trade off between the spatial resolution and computation time. We then solve for all pixels that are coherent in at least 2 interferograms to maximise the coherence of the signal.

2.3.3 *Persistent Scatterer InSAR (PSInSAR)*

The final technique we use is persistent scatterer InSAR (PSInSAR). PSInSAR methods overcome incoherence by identifying persistent scatterer pixels using amplitude and phase stability characteristics (Ferretti et al. 2001). Within an interferogram, the phase of each pixel is dependent upon the phase returns from all scatterers in the corresponding element on the ground (Chap. 1). Some pixels contain stable scatterers whose phase return remains constant over time despite changes in surrounding scatterers. These persistent scatterers dominate the phase return of the pixel and act to reduce the amplitude and phase variance (Hooper et al. 2007).

We use the Stanford Method for Persistent Scatterers (StaMPS) developed by Hooper et al. (2007). This method has proven beneficial in other volcanic settings, such as Three Sisters, OR (Riddick et al. 2012), plus several volcanoes in Iceland (e.g. Hooper et al. 2009; Ofeigsson et al. 2011) and Mexico (Pinel et al. 2011), all of which suffer incoherence due to steep topography, snow cover and vegetation. Like π -RATE, this method includes a correction for atmospheric and orbital noise based upon spatial correlation characteristics of the signal (see Hooper et al. (2007) for details). We apply StaMPS to all available acquisitions from the ENVISAT ascending, ENVISAT descending and ALOS datasets. Using information from the California Department of Water Resources, we also investigate the effects of snow on PSInSAR by applying StaMPS to a subset of SAR scenes that were acquired during snow-free months. Although this greatly increases the number of PS pixels, the reduced number of SAR scenes compromises estimations of noise terms and we do not take this approach further.

2.4 Results of Multi Temporal InSAR Analysis Techniques

The results from all datasets and analysis methods suggest that ground deformation at MLV continues in the 21st century. All datasets show subsidence of a similar region centred on the summit caldera (Fig. 2.3), with maximum LOS displacements of ~ -13 mm/yr for ascending datasets and ~ -7 mm/yr for descending datasets. The methods are of variable degrees of success, with π -RATE offering significant improvements to coherence compared to the InSAR results from Poland et al. (2006). In this section we assess the results from each method in terms of the improvement in coherence and the reduction of noise sources. To investigate the magnitude and spatial extent of subsidence recorded by each dataset, we take displacement profiles that are coincident with the short and long axes of the caldera (N-S and E-W respectively) (Fig. 2.4). As was the case for rate-maps, these profiles demonstrate broad agreement in the spatial extent of subsidence. The profiles highlight some variability in the magnitude of deformation when using different InSAR analysis techniques, which we attribute to different interferograms being used by each method, but overall the magnitude of deformation is consistent between the three datasets.

2.4.1 *Stacking*

Within the stacking results for ENVISAT ascending data, the region SW of the volcano is largely incoherent (Fig. 2.3). Where there is coherence, displacement profiles show maximum LOS subsidence rates of ~ -13 mm/yr. For ALOS ascending data, which exhibit good coherence at MLV, stacking is more successful, and profiles show maximum deformation rates of ~ -9 mm/yr (Fig. 2.4). However, subsidence of ~ -5 mm/yr is also observed across the highland between MLV and Mount Shasta (Fig. 2.3), suggesting that there is a remaining contribution from atmospheric stratification. For profiles of both ENVISAT and ALOS data, we observe other phase signals outside of the caldera, but these are not consistent between datasets and are considered to be due to noise.

Stacks of ENVISAT descending data show significant variability. Using the bootstrap test described in Sect. 2.3.1, we find that individual interferograms change the LOS deformation rate by $>2\sigma$, as many interferograms exhibit extensive phase heterogeneities, although the overall variance of the dataset is similar to that for ascending data (Fig. 2.2d). The edifice is also surrounded by larger regions of incoherence, causing many unwrapping errors in almost all scenes. We therefore find that stacking is not a robust method for dealing with this dataset.

2.4.2 π -RATE

The results of π -RATE for ENVISAT ascending data show almost continuous coherence about the caldera, a significant improvement upon the results of stacking. The magnitude of the deformation signal is reduced by a factor of ~ 1.5 compared to stacking, which we attribute to a reduction in the effects of atmospheric stratification. However, we do observe anomalous phase signals to the NW of the caldera which do not correlate with the results of other datasets (Fig. 2.3). For ALOS ascending data, displacement profiles taken across the results of π -RATE are of comparable magnitude to those for stacking and show similar distributions of displacements (Fig. 2.4). π -RATE is a much more successful method for ENVISAT descending data than stacking, reducing the effects of atmospheric turbulence and removing unwrapping errors by summing round loops of interferograms and masking any residuals (Biggs et al. 2007). Although the results for ENVISAT descending data remain more incoherent and noisy than those for both ascending datasets, displacement profiles show a clear subsidence signal with maximum LOS displacements of ~ -7 mm/yr, which is in agreement with the results of ascending data (Fig. 2.4).

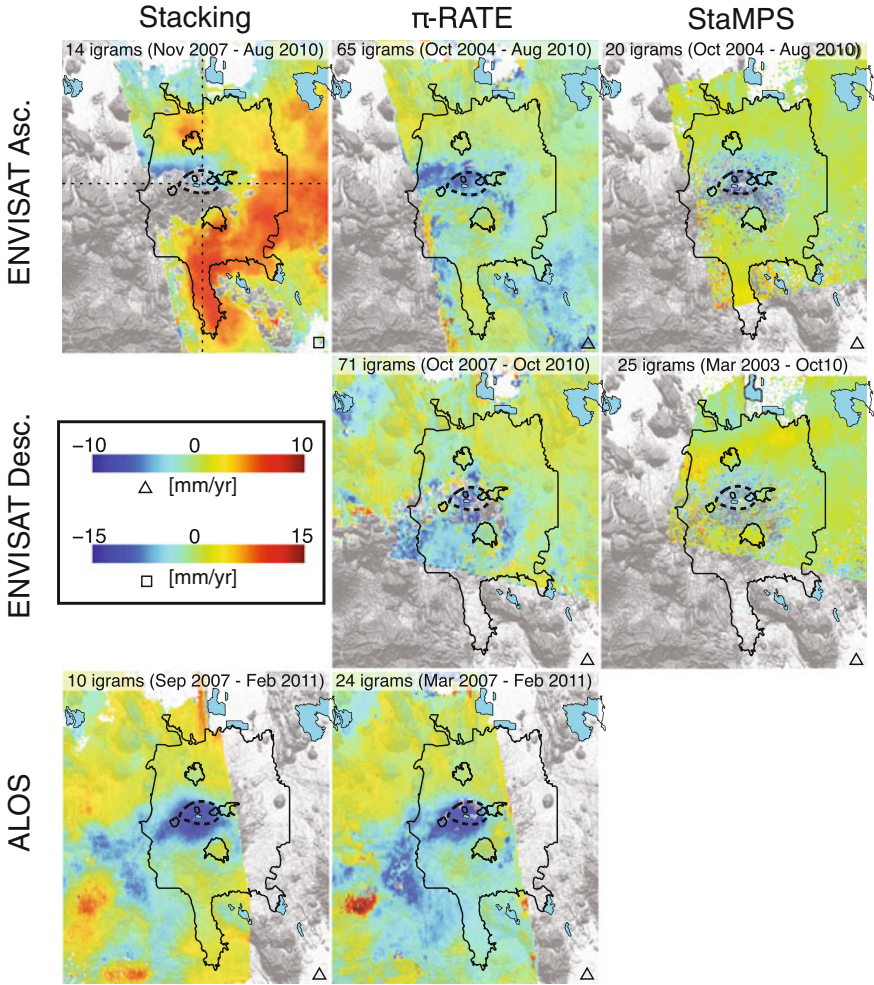


Fig. 2.3 Results of multi temporal InSAR analysis using ENVISAT ascending, ENVISAT descending and ALOS ascending datasets and three methods (noise-based stacking, π -RATE and StaMPS). Each result is labelled with number of interferograms used and dates spanned. Outlined in black are MLV lava flows (*solid lines*) and caldera (*dashed line*) as in Fig. 2.1. *Squares* and *triangles* indicate the colour scale used. *Dashed lines* on the results of ENVISAT ascending stacking shows the location of the profiles drawn in Fig. 2.4

2.4.3 PSInSAR

Applying StaMPS to ENVISAT data significantly improves coherence compared to the raw interferograms, although coherence is not as continuous as for the results of π -RATE. Most PS pixels in the vicinity of the caldera are coincident with large surficial lava flows (Fig. 2.3), which helps to constrain the extent of the deformation

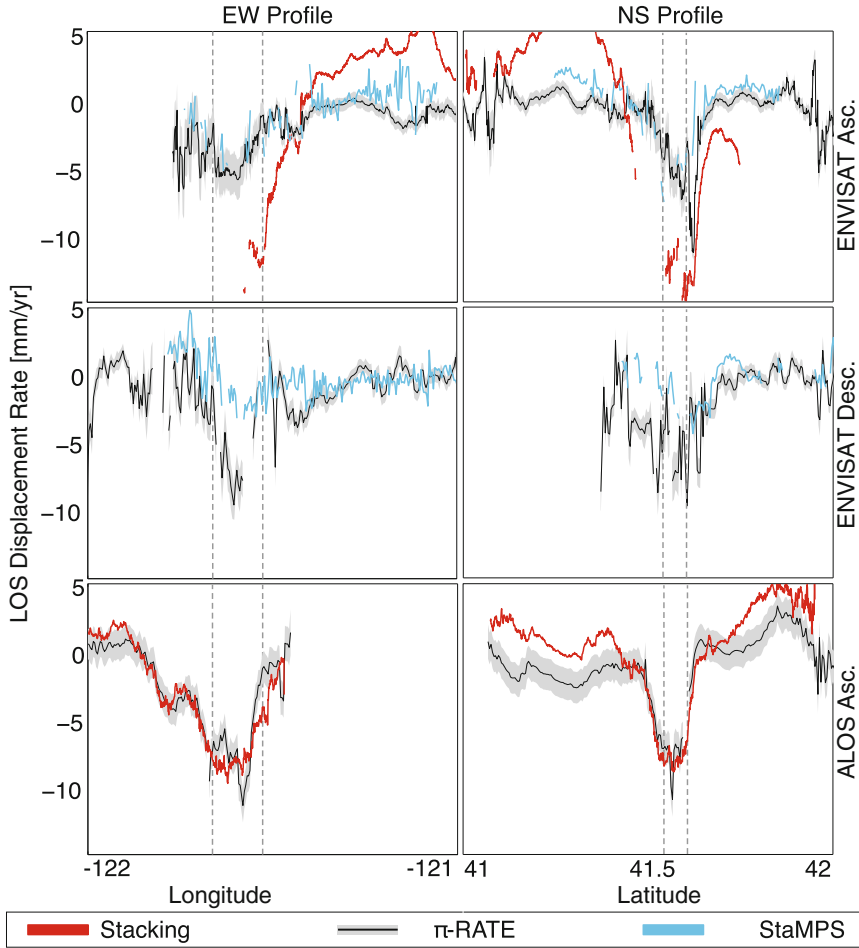


Fig. 2.4 Displacement profiles for multi temporal InSAR analysis taken across the long and short axes of the caldera (EW and NS directions respectively - see Fig. 2.3). The extent of the caldera is marked on all profiles with *dashed grey lines*. Error bounds on the results of π -RATE are calculated using the variance-covariance matrix in Eq. 2.4. There is good agreement in the spatial extent of the signal between different InSAR analysis techniques but for ENVISAT data we observe some variation in the magnitude of the signal due to different interferograms being used for each method

field. Lava flows with fewer PS pixels are sparsely vegetated. From reconnaissance field analysis we find that another possible control upon PS density at lava flows is modal block size - at Burnt Lava Flow directly south of the caldera we found that regions with fewer PS corresponded to a smaller modal block size (20–50 cm) compared to the average block size of the flow (50–100 cm). Other PS pixels are coincident with road intersections, smaller outcrops and clearings within the forest.

These findings are similar to those of Riddick et al. (2012) in their study of PS in central Oregon, although a possible relation between PS density and block size has not previously been noted.

The deformation field obtained with StaMPS for ENVISAT ascending data has a similar extent to that observed with stacking and π -RATE: deformation is focussed on the caldera between lava flows to the north, east, south and west, with maximum displacements of ~ -8 mm/yr at Medicine Lake Glass Flow in the NW of the caldera (Fig. 2.3). However, the anomalous phase signals observed NW of the caldera in the results of π -RATE have been reduced. Similar results are observed for ENVISAT descending data. Deformation is again constrained within a region bound by lava flows to the north, east, south and west of the caldera, however displacements are of smaller magnitude (up to ~ -5 mm/yr) and there is still some evidence of atmospheric turbulence north of the volcano (Fig. 2.3). Unlike ENVISAT data, ALOS ascending data is highly coherent at MLV and, due to the success of both stacking and π -RATE, we do not include the results of StaMPS analysis for this dataset.

2.4.4 Comparison to Past Geodetic Studies

Past geodetic studies at MLV show that the rate of subsidence remained constant (to within detection limits) between 1954 and 2004 (Dzurisin et al. 2002; Poland et al. 2006). To assess whether this observation can be extended to 2011, we compare the most coherent set of InSAR results (those produced using π -RATE) to the results of leveling from Dzurisin et al. (2002).

The section of the leveling line that covers MLV caldera extends northwards from Burnt Lava Flow south of the caldera, to the centre of the caldera, before continuing west across the long-axis of the caldera (see map in Fig. 2.5). We select pixels within 1500 m of each leveling station (ensuring that we use the values from >10 pixels) and calculate the average deformation rate before referencing to pixels coincident with the reference leveling station. We assume the deformation is vertical and, as InSAR measurements are made oblique to vertical, project the leveling measurements into the LOS using the satellite look vector as defined in Wright et al. (2004b). Error bars on InSAR measurements are then 1σ calculated by propagating the error values at each pixel, which are obtained using the formal error estimation of π -RATE (Eq. 2.4).

Both ENVISAT datasets are in agreement with the results of past leveling surveys, with maximum displacements coincident with the caldera (Fig. 2.5). ALOS ascending data are also in close agreement with ENVISAT on the S-N portion of the line. On the E-W portion of the line there is an increase in the magnitude of the signal recorded by ALOS, which we attribute to under correction of residual atmospheric artefacts across the highland between MLV and Mount Shasta (Fig. 2.5). Overall, we find no evidence of a decrease in the rate of subsidence since 1954, as the results of InSAR analysis fall within error of leveling measurements. This suggests that the constant rate of subsidence detected by Dzurisin et al. (2002) continued until at least the last ALOS acquisition in 2011. Deformation at MLV has therefore been sustained at a steady rate for over 60 years.

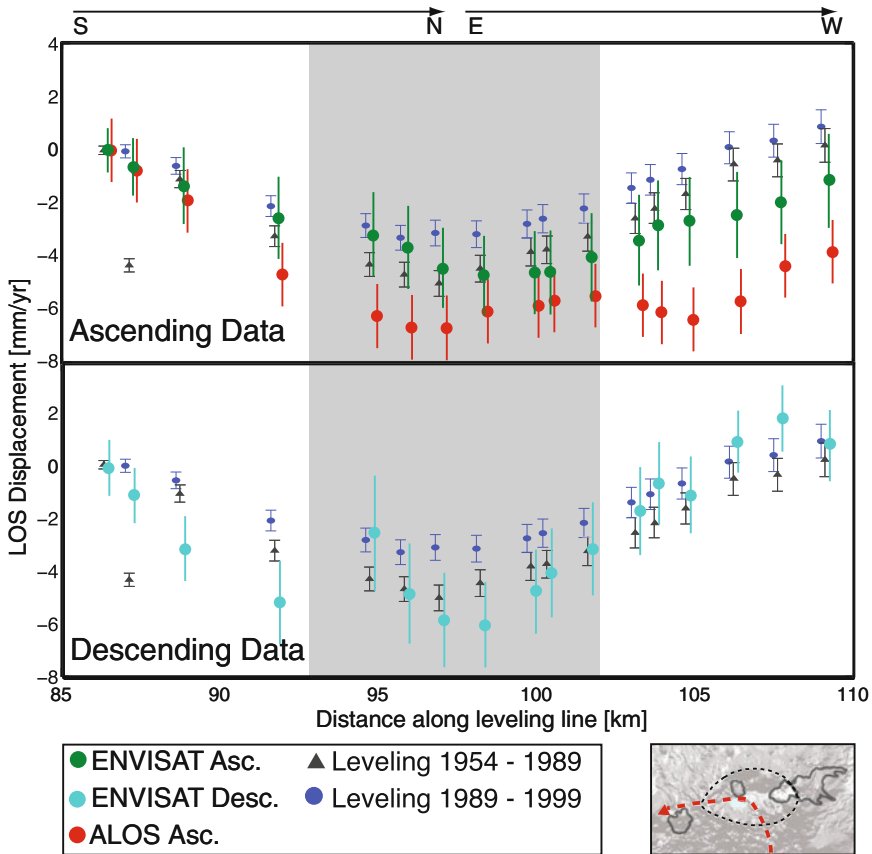


Fig. 2.5 Comparison between the results of leveling from Dzurisin et al. (2002) and InSAR. Profiles are offset to aid viewing. The section of the leveling line used is shown by the *red line* in the small map, where *black lines* show MLV caldera and lavas as in Fig. 2.1. The *shaded grey* region of the profiles corresponds to the extent of the caldera. We average pixels within 1500 m of each leveling station and reference to pixels at the reference leveling station. Errorbars on InSAR measurement are 1σ and are calculated by propagating the error on individual pixels from the variance-covariance matrix in Eq. 2.4 (color figure online)

2.4.5 Horizontal and Vertical Displacements

The side-looking nature of InSAR satellites means that measurements contain a component of both horizontal and vertical motion in the LOS of the satellite (for details see e.g. Rosen et al. 2000). We can therefore use multiple tracks of data, each of which has a different satellite look direction, to decompose the LOS motion into horizontal and vertical components (e.g. Wright et al. 2004b; Biggs et al. 2009b). This allows us to better constrain the 3D deformation field at MLV, in addition to

providing measurements at a higher temporal and spatial resolution than past geodetic campaigns.

Using the results for ENVISAT ascending and ENVISAT descending data, we solve for the EW and vertical components of motion only, $\mathbf{u} = (u_E, u_Z)^T$, as InSAR measurements are less sensitive to NS motion. We use the equation $\mathbf{R} = \mathbf{S}\mathbf{u}$, where \mathbf{R} is a vector of the LOS displacements for each dataset and \mathbf{S} is a 2×2 matrix containing the unit satellite look vectors for each dataset (Wright et al. 2004b). We solve for \mathbf{u} at each pixel, weighting the inversion using a covariance matrix for errors in the observed range change Σ_R (Wright et al. 2004b). Σ_R contains values based upon covariance analysis from Eq. 2.3, and is used to find the covariance matrix for the estimated vector components, Σ_u .

The relative magnitudes of the resulting horizontal and vertical displacement fields are in agreement with measurements from leveling and GPS (Fig. 2.6). GPS

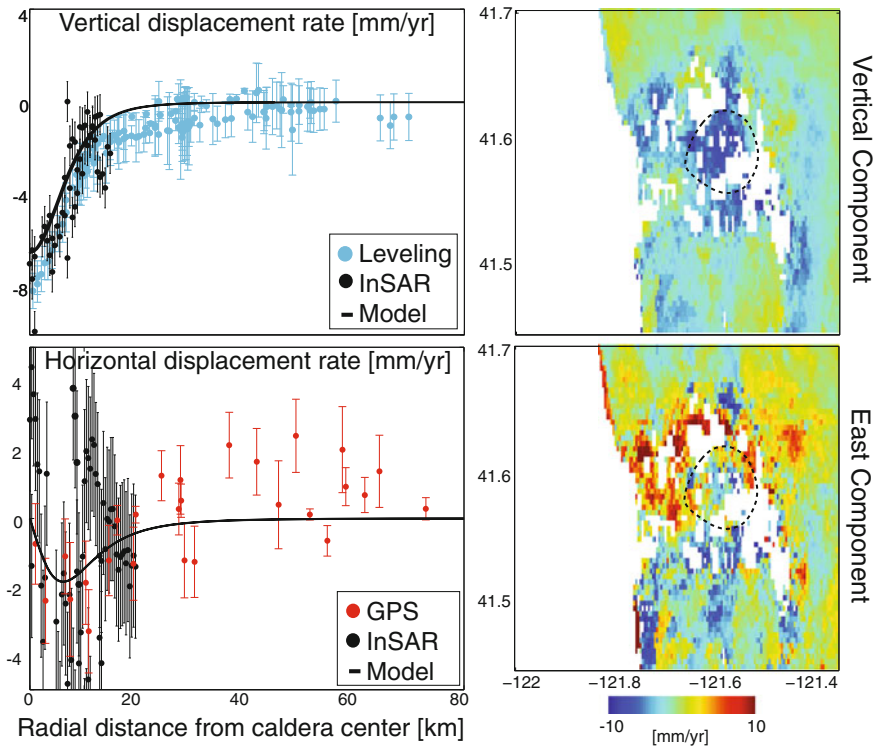


Fig. 2.6 Left comparison between vertical and horizontal components of motion derived from InSAR and from past geodetic studies. Leveling measurements are from Dzurisin et al. (2002) and GPS measurements are from Poland et al. (2006). Errorbars on InSAR data are found using the covariance matrix Σ_u described in Sect. 2.4.5. The solid black line shows model displacements for the best fitting analytical model to InSAR data described in Sect. 2.5.3 and Table 2.2. Right vertical and horizontal displacements found by inverting multiple tracks of InSAR data as described in Sect. 2.4.5. The caldera is marked by a dashed black line

surveys of MLV revealed the high ratio of vertical to horizontal displacements (Poland et al. 2006) and we find that this is confirmed by InSAR data, with InSAR derived horizontal displacements of ~ 3 mm/yr, compared to vertical displacements of up to ~ -8 mm/yr (Fig. 2.6). Both horizontal and vertical deformation fields are broadly symmetrical and centered on the caldera centre, with vertical deformation extending for ~ 20 km (Fig. 2.6).

2.5 Modelling: Estimates of Source Geometry and Volume Change

The past studies of Dzurisin et al. (2002) and Poland et al. (2006) consider possible sources of subsidence at MLV. Both authors acknowledge the tectonic contribution due to extension of the Basin and Range province, plus a component of surface loading due to the large volume of emplaced material. However, they also recognise that, to fully explain the deformation field, a component of volume loss at depth is required. The authors model this by first using idealised, elastic models - a well established and widely used approach to obtain information about source geometries from geodetic data (e.g. Dzurisin 2007; Segall 2010). As mentioned previously, there are discrepancies between the best fitting source models to each dataset, as leveling and GPS measurements are sensitive to different components of the deformation field. Both datasets favour a sill rather than a point source, but leveling data prefer a smaller ($10.3 \text{ km} \times 4.4 \text{ km}$), deeper (11 km) source that strikes NE-SW (221°) (Dzurisin et al. 2002), whereas GPS data prefer a larger ($18.2 \text{ km} \times 9.2 \text{ km}$), shallower (5 km) source that strikes E-W (267°) (Poland et al. 2006) (Table 2.2).

We address analytical models of the deformation source using the improved spatial resolution of all available InSAR measurements. As the problem is highly non-linear, we use a Monte Carlo type simulated annealing algorithm as an optimisation tool to minimise the misfit function (Amelung and Bell 2003). This combines the efficiency of a derivative based search algorithm whilst testing a wide range of source parameters to avoid local minima. We simultaneously solve for all datasets, reducing the number of data points by downsampling (e.g. Biggs et al. 2010; Hamling et al. 2014, and others). We downsample to a regular grid rather than by quadtree partitioning, as regions of high phase gradients are associated with atmospheric noise in addition to ground deformation. As source models of this nature are inherently non-unique, we investigate the trade-offs between model parameters and the bounds upon each model parameter using a Monte Carlo algorithm (e.g. Wright et al. 2004a; Biggs et al. 2009a). This is done by using the parameterised values of the covariance function (Eq. 2.3) to create 100 sets of synthetic atmospheric noise for each dataset, which are then added to the results selected in Sect. 2.5.1 before rerunning the same inversion procedure. The best fitting parameters and 1σ error bounds from Monte Carlo analysis are summarised in Table 2.2, and histograms showing the distribution of the model parameters are shown in Fig. 2.11 in the Appendix. Cayol and Cornet

Table 2.2 Summary of analytical source models from this study and past geodetic studies. Top: Best fitting point source model. Bottom: Best fitting rectangular sill model. Upper and lower bounds on source parameters to InSAR data are 1σ from Monte Carlo Error Analysis described in Sect. 2.5

Data	Long. [°W]	Lat. [°N]	Depth [km]	Length [km]	Width [km]	Strike [°]	Opening [m/yr]	Δ volume [km ³ /yr]	Misfit ^a
Leveling ¹	121.580	41.590	10	–	–	–	–	–0.0031	18.31
	121.590	41.580	6	–	–	–	–	–0.0010	1.24
GPS ²	121.562	41.573	5.8	–	–	–	–	–0.00095	5.33 mm
	121.569	41.576	6.2	–	–	–	–	–0.0013	–
Leveling ¹	121.410	41.566	11	10.3	4.4	221	–0.0446	–0.0020	18.33
	121.559	41.637	–	–	–	–	–	–	–
GPS ²	121.499	41.623	5	18.2	9.2	267	–0.0151	–0.0025	0.96
	121.718	41.616	–	–	–	–	–	–	–
InSAR	121.566	41.576	9.1	1.0 ^b	1.0 ^b	245	–1.10	–0.0011	5.31 mm
	121.572	41.580	9.8	–	–	255	–1.33	–0.0013	–

^aMisfit values are not comparable between studies but lower values indicates a better model fit

Misfit for this study is the total RMS error between the model and each dataset

^bParameter value is fixed in the inversion of InSAR data

Parameters and bounds are from the following references: ¹Dzurisin et al. (2002), ²Poland et al. (2006)

(1998) discuss the bias introduced in analytical modelling by steep topography, but we choose not to account for the effects of topography as MLV has low relief compared to the surrounding plateau and topographic slopes do not exceed $2\text{--}3^\circ$.

2.5.1 *Selection of InSAR Data for Use in Modelling*

We use all datasets to model the deformation at MLV, selecting the most successful multi temporal InSAR approach in each case. For ENVISAT ascending data we use the results of StaMPS, as this offers the best deformation signal, avoiding anomalous phase signals to the NW of the volcano that are not observed in other datasets (Fig. 2.3). For ENVISAT data, we select the results of π -RATE, as the improvement to coherence is greater than that with StaMPS, as is the reduction of atmospheric turbulence (Fig. 2.3). Both stacking and π -RATE offer comparable results for ALOS data, but the application of π -RATE has reduced the magnitude of topographically correlated atmospheric delays observed near Mount Shasta (Fig. 2.3), and we use this as the final input for modelling.

2.5.2 *Point Source*

We begin by solving for the simplest point source geometry parameterised in terms of: [x, y] location, depth and volume change (Mogi 1958; Dzurisin et al. 2002; Poland et al. 2006). We allow the location to vary over the extent of the caldera and depth to vary between 2 and 20 km. The best fitting source parameters are similar to those found by Dzurisin et al. (2002) for leveling data and Poland et al. (2006) for GPS data (Table 2.2), with a source depth of 6 km and rate of volume change of $-0.0012 \text{ km}^3/\text{yr}$. Using Monte Carlo error analysis we find that the location of the source is well constrained SE of the caldera centre (Fig. 2.7a). We also identify a strong trade-off between depth and source strength as smaller volume changes at shallow depths produce a similar magnitude of deformation as larger volume changes at greater depths (Fig. 2.7b). Although we do not expect a point source to be the most representative source geometry (Dzurisin et al. 2002; Poland et al. 2006), the results of this modelling provide good constraints upon the location of the deformation source at MLV.

2.5.3 *Sills*

We test more complicated source geometries that are representative of sill-like intrusions, using an approximation of a horizontal, rectangular dislocation (Okada 1985) (the preferred model for both leveling (Dzurisin et al. 2002) and GPS data (Poland

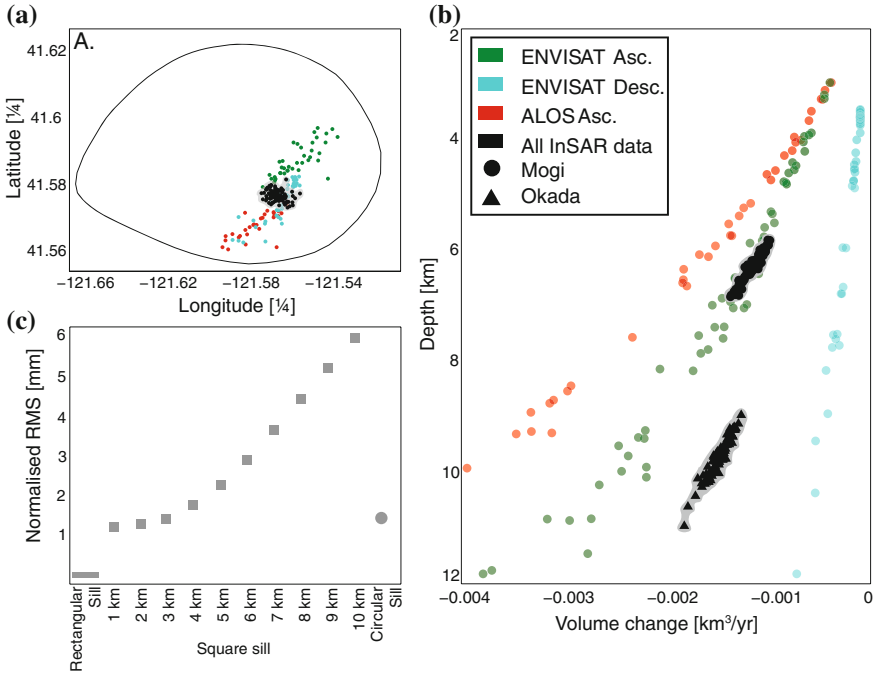


Fig. 2.7 **a** results of Monte Carlo error analysis for inversions of a point source to constrain the source location. *Coloured circles* represent inversions of individual datasets and *black circles* are for joint inversions of all InSAR data. *Black line* shows the extent of the summit caldera. **b** trade-off curves obtained from Monte Carlo analysis showing the trade-off between source strength and depth for different source geometries. **c** summary of the RMS misfit for different model geometries found by inverting all InSAR datasets. Square sills with width and length < 4 km fit the data to within 1% of the RMS misfit for the best fitting rectangular and circular sills (color figure online)

et al. 2006)). The source is parameterised in terms of: $[x, y]$ location, depth, length, width, strike, dip and opening. We assume a dip of 0° given the apparent symmetry of the deformation signal and the similarity between ascending and descending interferograms. The remaining model parameters are constrained between a set of bounds to reduce the size of the parameter space. We set bounds upon the location using the results of point source modelling described above. For the remaining free parameters (length, width and strike) we run a selected range of forward models, varying a single parameter in each case. We then calculate the RMS and plot a curve of RMS versus model parameter. Bounds are then set based upon regions of low RMS. In addition to geometrical parameters, we specify a Poisson's Ratio of 0.25. As was observed for a point source, solutions are non unique, and we identify a trade-off between the magnitude of the source and the depth (Fig. 2.7b).

From Monte Carlo analysis we find that rectangular sills tend towards lengths in excess of 20 km due to residual atmospheric stratification across the highland to the south west of the volcano, which elongates the subsidence signal (Figs. 2.1a and 2.4).

These lengths are unrealistic: a sill of this size does not fit with models of leveling or GPS data. To overcome this, we rerun the inversion procedure solving for a square sill (length-to-width ratio = 1). We find that square sills with length and width <4 km fit the data to within 1 % of the RMS for the best fitting rectangular sill (Fig. 2.7c).

The best fitting source geometry found by inverting all datasets is a square sill with length and width 1 km, located at 9.5 Km depth with maximum opening of -1.2 m/yr (Table 2.2 and Fig. 2.8). This model gives RMS values of 1.67, 1.16 and 2.48 mm for ENVISAT ascending, ENVISAT descending and ALOS datasets respectively. (Figure 2.8) We estimate the expected error (σ) of each InSAR result using covariance analysis (Eq. 2.3). As each InSAR result is produced using multiple interferograms, the expected error is reduced to σ/\sqrt{N} , where N is the number of observations and σ is assumed to be uncorrelated between observations (e.g. Parks et al. 2011). We obtain expected error values of 1.4, 1.1 and 2.5 mm for ENVISAT ascending, ENVISAT descending and ALOS datasets, which are of the same order as the RMS between the best fitting model and each dataset.

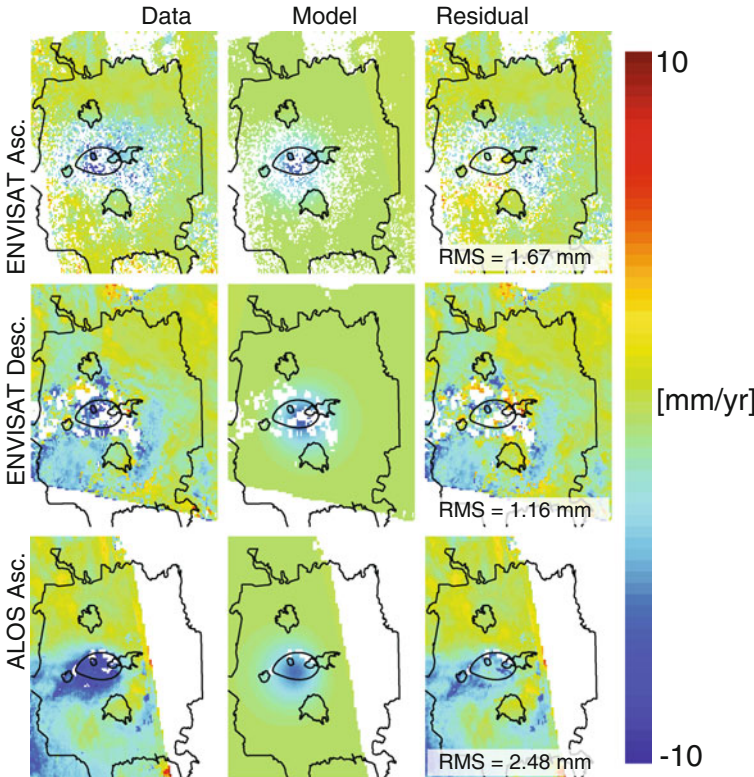


Fig. 2.8 Results of inverse modelling. Data are the InSAR analysis results defined in Sect. 2.5.1 and the best fitting model is a square sill with parameters specified in Table 2.2. Plots of residual are labelled with RMS values

The final step of the modelling procedure is to ensure that the model accounts for the high ratio of vertical to horizontal displacements recorded by InSAR. We compare profiles of horizontal and vertical model displacements to the components of motion derived from InSAR data, and also consider the magnitude of horizontal and vertical measurements from GPS and leveling (Fig. 2.6). The vertical displacements predicted by the model provide a good fit to the vertical measurements from InSAR (RMS 1.88 mm), with maximum displacements of ~ -7 mm/yr, and subsidence extending for ~ 20 km. Model displacements are also mostly within error of the vertical measurements from leveling, although maximum displacements are 1–2 mm/yr smaller than those recorded by leveling. The horizontal displacements from InSAR are more variable than the vertical measurements, and are of the same magnitude as the errors (Fig. 2.6). However, profiles do show that the horizontal model displacements are within the error bounds of the InSAR measurements. In accordance with GPS observations, the horizontal displacements predicted by the model are a factor of ~ 3 smaller than vertical displacements, and at radial distances < 20 km, the model displacements are within error of the GPS measurements.

Through modelling all available InSAR data, we confirm that the best fitting source geometry at MLV is sill-like. However, uniform opening of a rectangle is not a physically realistic model, and we test this solution against a uniform pressure solution - an axi-symmetric, horizontal, penny shaped crack parameterised in terms of: $[x, y]$ location, depth, radius and pressure change (Fialko et al. 2001a; Biggs et al. 2009a). This model has been used in other settings where large ratios of vertical to horizontal displacements have been observed (e.g. Campi Flegrei, Italy; Battaglia et al. 2006). We follow the same procedure described above to solve for the best fitting circular sill and investigate the bounds upon the source parameters. As for the rectangular sill, we find from Monte Carlo error analysis that the sill radius tends towards unrealistically large values, and we therefore opt to constrain the radius of the sill to 1 km, emulating the geometry of the best-fitting square sill. The best fitting circular sill is located within 1 km of the best fitting square sill, has the same source depth of 9.5 km and predicts displacements that vary by only up to 1 mm from those predicted by the square shaped sill. This suggests that the depth, location and overall nature of the source are well constrained, but we are unable to distinguish the exact shape of the source.

2.6 Discussion

Subsidence of MLV is unique in both duration and stable magnitude, with surveys of U.S. Geological Survey geodetic networks since 1954 providing a long and detailed geodetic history of the volcano. The focus of this work has been to use the significant archive of InSAR data acquired at MLV to build upon the long-term record of subsidence, extending the geodetic history to 2011 and investigating the spatial and temporal pattern of deformation at higher resolution. Although the application of these data in this region is problematic, by using a range of datasets from differ-

ent satellites and a suite of new analysis methods, we have been able to use InSAR data to demonstrate that deformation remains at historical rates of ~ -10 mm/yr. Of the methods used, we find that π -RATE provides the greatest improvement to coherence, with the coverage of ENVISAT datasets increased by 30 % compared to the raw interferograms (Table 2.1). Comparing the mean values of the orbital and covariance parameters (Eqs. 2.2 and 2.3) before and after application of π -RATE, we also find that this technique reduces the level of noise of each dataset (Table 2.1).

2.6.1 Causes of Subsidence

Past studies attribute subsidence at MLV to a combination of factors including tectonic extension and surface loading, due to the volume of the edifice and its location at the western edge of the Basin and Range extensional province (Dzurisin et al. 2002; Poland et al. 2006). However, GPS measurements show that there is no resolvable extensional strain across the region (Poland et al. 2006), and surface loading is at odds with drill hole data, which suggests that subsidence rates are anomalously high in the present day, as downwarping of the crust beneath the edifice would have occurred within only ~ 10 % of the lifespan of the volcano (Dzurisin et al. 2002). Poland et al. (2006) suggest that these larger scale processes would enhance subsidence, rather than be the primary cause, and infer an additional component to account for volume loss at depth. Poland et al. (2006) and Dzurisin et al. (2002) discuss the likelihood of various possible mechanisms: volume loss due to eruption; drainage to a deeper reservoir; hydrothermal fluid withdrawal; and cooling and crystallisation at depth. Of these possibilities, Poland et al. (2006) deem drainage or cooling and crystallisation to be most likely: the last eruption at MLV occurred 1 ka, and the steady nature of the deformation since the 1950s does not agree with a hydrothermal source, as hydrothermal systems generally exhibit cycles of deformation that occur over shorter timescales (e.g. Dzurisin et al. 1999). The hypothesis of cooling and crystallising magmatic material is also supported by elevated temperatures discovered by geothermal drilling, thought to be due to either the reservoir beneath Glass Mountain or basalt intruded at depth in late Holocene times (Donnelly-Nolan et al. 1990).

The depth of the modelled source is significant when considering cooling and crystallisation as a deformation mechanism at MLV. Rather than the presence of a central magma chamber, the results of geophysical and geological surveys suggest that MLV is underlain by an extensive intrusive complex of sills and dikes with varying compositions (e.g. Finn and Williams 1982; Zucca et al. 1986; Fuis et al. 1987; Evans and Zucca 1998; Lowenstern et al. 2003). Seismic tomography studies of the volcano reveal a small magma body located beneath Glass Mountain (the site of most recent eruption ~ 1 ka) at 3–7 km depth (Evans and Zucca 1998), but they also indicate that a subsolidus pluton could be present within the larger intrusive complex (Ritter and Evans 1997). A shallower source depth may therefore suggest deformation related to material imaged at Glass Mountain, whereas a greater source depth may be indicative of cooling within the underlying intrusive complex.

The best fitting analytical source model identified in this study fits with the source mechanisms presented by previous authors and accounts for the high ratio of vertical to horizontal displacements derived from InSAR data. The depth of the model (9.5 km) suggests that, if cooling and crystallisation is the cause of volume loss, the source is likely to be located within the intrusive complex beneath the volcano, rather than the body of melt imaged at 3–7 km depth. In their study, Dzurisin et al. (2002) state that an unrealistically large volume would be required to result in 50 years of subsidence due to cooling and crystallisation. However, simple thermoelastic calculations (e.g. Turcotte and Schubert 1982) do not account for the geotherm, which in this region is thought to be relatively high, or the underlying intrusive complex, which geodetic models suggest is the location of the deformation source. This intrusive complex is described by Poland et al. (2006) as a “relatively hot, roughly cylindrical volume”, and is likely to play a role in driving the active geothermal system. Elevated temperatures surrounding an intrusion would decrease the rate of cooling, as would the production of latent heat during the transition from a liquid to a solid phase. Thus, it is important not to disregard cooling and crystallisation as a possible cause of deformation.

2.7 Conclusions

This study demonstrates how InSAR data may be successfully applied in mountainous, vegetated regions by using multiple datasets, careful data selection and a suite of multi temporal analysis methods that account for atmospheric and orbital noise sources. Both StaMPS and π -RATE are freely accessible online and offer user support, which plays a fundamental role in helping the community use these methods to better apply InSAR data in challenging regions. The application of these advanced InSAR techniques will be key to the success of data analysis from the new generation of SAR satellites, with the limiting factor likely to be the acquisition rate of the satellite.

Using the results of multi temporal analysis at MLV, we show that the rate of subsidence constrained by InSAR data is comparable to that obtained from leveling studies throughout the 20th century, suggesting that current rates of deformation at the volcano have been continuous for over 60 years. We confirm that, as was observed with GPS measurements, the deformation field is characterised by high ratios of vertical to horizontal displacements, which is a key constraint upon source models of deformation. We use geophysical inversion methods and Monte Carlo error analysis to obtain the best fitting source geometry to InSAR data, which we find to be a horizontal sill located at 9.5 km depth beneath the caldera. This geometry accounts for the relative magnitudes of horizontal and vertical components of deformation as recorded by both InSAR and past ground based surveys. The model is similar to those constrained by past datasets, and fits the hypothesis that deformation at MLV is caused by a combination of tectonic mechanisms, plus a component of volume loss at depth. The most likely cause of volume loss is either drainage or cooling and crystallisation of magmatic material. If cooling and crystallisation is the cause of

present day deformation, the depth of the model suggests that it is related to material within the intrusive complex imaged beneath the volcano.

The next step of studies at MLV will be to use the high resolution of InSAR data and these first order estimates of source geometry to constrain models of magmatic and tectonic causes of deformation. This will provide further insight into magmatic conditions in northern California, but it is also an opportunity to test hypotheses related to long-term intrusive processes that occur during inter-eruptive periods (e.g. Caricchi et al. 2014).

Appendix

See Figs. 2.9, 2.10 and 2.11.

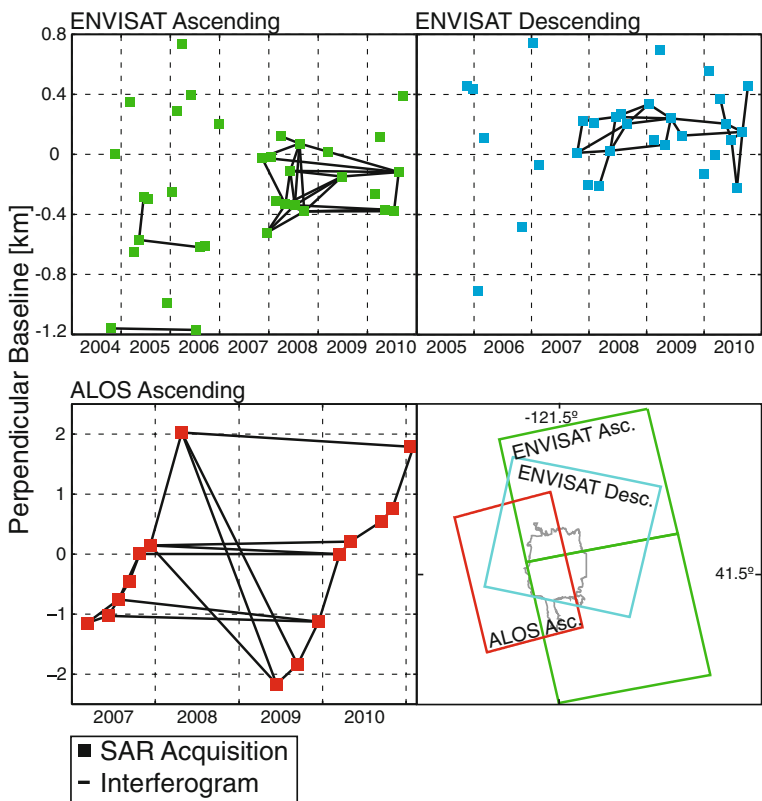


Fig. 2.9 Time versus perpendicular baseline plots for InSAR datasets at Medicine Lake Volcano. Interferograms are those with >30% coherence at the summit of the volcano. Map shows the coverage of each InSAR track with respect to the extent of Medicine Lake Volcano lavas


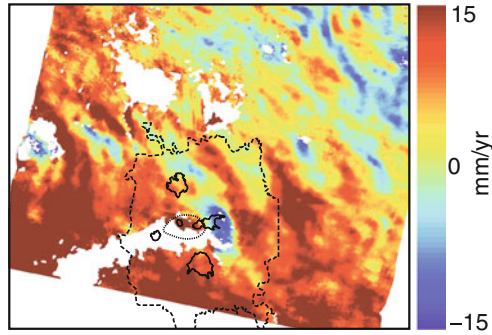


Fig. 2.10 Example of incoherence, orbital phase ramp and turbulent atmospheric noise commonly observed at Medicine Lake Volcano in ENVISAT descending data. The outline of the extent of Medicine Lake Volcano lavas is shown by *long-dashed line*. The caldera is shown by the *short-dashed line* and major surgical lava flows are shown by *solid black lines*

MOGI SOURCE

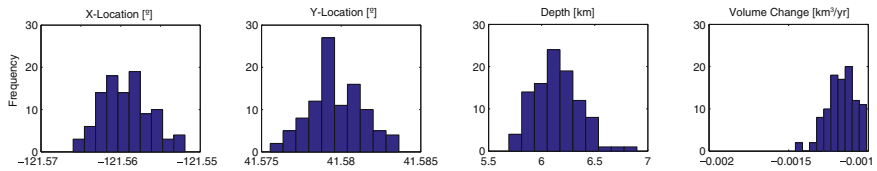

OKADA SOURCE

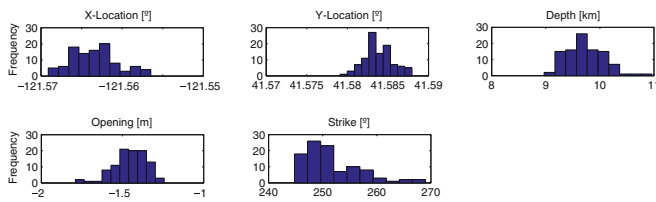


Fig. 2.11 Histograms for each model parameter from Monte Carlo error analysis. Histograms are used to calculate the 1σ error bounds on the source parameters

References

- Amelung, F., & Bell, J. (2003). Interferometric synthetic aperture radar observations of the 1994 Double Spring Flat, Nevada, earthquake (M5.9): Main shock accompanied by triggered slip on a conjugate fault. *Journal of Geophysical Research*, 108(B9), 2433.
- Battaglia, M., Troise, C., Obrizzo, F., Pingue, F., & De Natale, G. (2006). Evidence for fluid migration as the source of deformation at Campi Flegrei caldera, (Italy). *Geophysical Research Letters*, 33, L01307.
- Berardino, P., Fornaro, G., Lanari, R., & Sansosti, E. (2002). A new algorithm for surface deformation monitoring based on small baseline differential SAR interferograms. *IEEE Transactions on Geoscience and Remote Sensing*, 40, 2375–2383.

- Biggs, J., Wright, T., Lu, Z., & Parsons, P. (2007). Multi-interferogram method for measuring inter seismic deformation: Denali Fault, Alaska. *Geophysical Journal International*, 170, 1165–1179.
- Biggs, J., Anthony, E. Y., & Ebinger, C. J. (2009a). Multiple inflation and deflation events at Kenyan volcanoes. *East African Rift. Geology*, 37(11), 979–982.
- Biggs, J., Robinson, D. P., & Dixon, T. H. (2009b). The 2007 Pisco, Peru, earthquake (M8.0): seismology and geodesy. *Geophysical Journal International*, 176, 657–669.
- Biggs, J., Lu, Z., Fournier, T., & Freymueller, J. T. (2010). Magma flux at Okmok Volcano, Alaska, from a joint inversion of continuous GPS, campaign GPS and interferometric synthetic aperture radar. *Journal of Geophysical Research*, 115, B12401.
- Biggs, J., Ebmeier, S. K., Aspinall, W. P., Lu, Z., Pritchard, M. E., Sparks, R. S. J., et al. (2014). Global link between deformation and volcanic eruption quantified by satellite imagery. *Nature Communications*, 5, 3471.
- Blakely, R. J., Christiansen, R. L., Guffanti, M., Wells, R. E., Donnelly-Nolan, J. M., Muffler, L. J. P., et al. (1997). Gravity anomalies, Quaternary vents, and Quaternary faults in the southern Cascade Range, Oregon and California; implications for arc and backarc evolution. *Journal of Geophysical Research*, 102, 22513–22527.
- Caricchi, L., Biggs, J., Annen, C., & Ebmeier, S. (2014). The influence of cooling, crystallisation and re-melting on the interpretation of geodetic signals in volcanic systems. *Earth and Planetary Science Letters*, 388, 166–174.
- Cayol, V., & Cornet, F. H. (1998). Effects of topography on the interpretation of the deformation field of prominent volcanoes: Application to Etna. *Geophysical Research Letters*, 25(11), 1979–1982.
- Chaussard, E., Amelung, F., & Aoki, Y. (2013). Characterization of open and closed volcanic systems in Indonesia and Mexico using InSAR time series. *Journal of Geophysical Research*, 118(8), 3957–3969.
- de Zeeuw-van Dalfsen, E., Pedersen, R., Hooper, A., & Sigmundsson, F. (2012). Subsidence of Askja caldera 2000–2009: Modelling of deformation processes at an extensional plate boundary constrained by time series InSAR analysis. *Journal of Volcanology and Geothermal Research*, 213, 72–82.
- Doin, M.-P., Lasserre, C., Peltzer, G., Cavalie, O., & Doubre, C. (2009). Correction of stratified atmospheric delays in SAR interferometry: Validation with global atmospheric models. *Journal of Applied Geophysics*, 69, 35–50.
- Donnelly-Nolan, J. M. (1988). A magmatic model of Medicine Lake volcano, California. *Journal of Volcanology and Geothermal Research*, 93, 4412–4420.
- Donnelly-Nolan, J. M. (2010). Geologic map of Medicine Lake volcano, northern California. U.S. Geological Survey Scientific Investigations Map 2927, scale 1:50,000.
- Donnelly-Nolan, J. M., & Lanphere, M. A. (2005). Argon dating at and near Medicine Lake volcano, California: Results and data. U.S. Geological Survey Open-File Report (2005–1416).
- Donnelly-Nolan, J. M., Champion, D. E., Miller, C. D., Grove, T. L., & Trimble, D. A. (1990). Post-11,000-year volcanism at Medicine Lake Volcano, Cascade Range, Northern California. *Journal of Geophysical Research*, 95(B12), 19693–19704.
- Donnelly-Nolan, J. M., Grove, T. L., Lanphere, M. A., & Champion, D. E. (2008). Eruptive history and tectonic setting of Medicine Lake Volcano, a large rear-arc volcano in the southern Cascades. *Journal of Volcanology and Geothermal Research*, 177, 313–328.
- Dzurisin, D. (2007). *Volcano deformation: Geodetic monitoring techniques*. Chichester, UK: Springer-Praxis.
- Dzurisin, D., Donnelly-Nolan, J. M., Evans, J. R., & Walter, S. R. (1991). Crustal subsidence, seismicity, and structure near Medicine Lake volcano. *California. Journal of Geophysical Research*, 96(B10), 16319–16333.
- Dzurisin, D., Wicks, J. C., & Thatcher, W. (1999). Renewed uplift at the Yellowstone Caldera measured by levelling surveys and satellite radar interferometry. *Bulletin of Volcanology*, 61(6), 349–355.

- Dzurisin, D., Poland, M. P., & Bürgmann, R. (2002). Steady subsidence of Medicine Lake Volcano, Northern California, revealed by repeated levelling surveys. *Journal of Geophysical Research*, 107(B12), 2372.
- Ebmeier, S. K., Biggs, J., Mather, T. A., & Amelung, F. (2013b). On the lack of InSAR observations of magmatic deformation at Central American volcanoes. *Journal of Geophysical Research*, 118(5), 2571–2585.
- Elliott, J. R., Biggs, J., Parsons, P., & Wright, T. J. (2008). InSAR slip rate determination on the Altyn Tagh Fault, northern Tibet, in the presence of topographically correlated atmospheric delays. *Geophysical Research Letters*, 35(12), L12309.
- Evans, J. R., & Zucca, J. J. (1998). Active high-resolution seismic tomography of compressional wave velocity and attenuation structure at Medicine Lake Volcano, Northern California Cascade Range. *Journal of Geophysical Research*, 93(B12), 15016–15036.
- Farr, T. G., & Kobrick, M. (2000). Shuttle radar topography mission produces a wealth of data. *Eos, Transactions American Geophysical Union*, 81(48), 583–585.
- Ferretti, A., Prati, C., & Rocca, F. (2001). Permanent scatterers in SAR interferometry. *IEEE Transactions on Geoscience and Remote Sensing*, 39(1), 8–20.
- Fialko, Y., Khazan, Y., & Simons, M. (2001a). Deformation due to a pressurised horizontal circular crack in an elastic half-space, with applications to volcano geodesy. *Geophysical Journal International*, 146(1), 181–190.
- Finn, C., & Williams, D. L. (1982). Gravity evidence for a shallow intrusion under Medicine Lake Volcano. *California. Geology*, 10(10), 503–507.
- Foster, J., Brooks, B., Cherubini, T., Shacat, C., Businger, S., & Werner, C. L. (2006). Mitigating atmospheric noise for InSAR using a high resolution weather model. *Geophysical Research Letters*, 33(16), L16304.
- Fuis, G. S., Zucca, J. J., Mooney, W. D., & Milkereit, B. (1987). A geological interpretation of seismic refraction results in north-eastern California. *Bulletin of the Geological Society of America*, 98(1), 53–65.
- Garthwaite, M. C., Wang, H., & Wright, T. J. (2013). Broudscale interseismic deformation and fault slip rates in the central Tibetan Plateau observed using InSAR. *Journal of Geophysical Research*, 118(9), 5071–5083.
- Goldstein, R., & Werner, C. (1998). Radar interferogram filtering for geophysical applications. *Geophysical Research Letters*, 25(21), 4035–4038.
- Goldstein, R., Zebker, H., & Werner, C. (1988). Satellite radar interferometry: Two dimensional phase unwrapping. *Radio Science*, 23(4), 713–720.
- Gourmelen, N., Amelung, F., & Lanari, R. (2010). Interferometric synthetic aperture radar-GPS integration: Interseismic strain accumulation across the Hunter Mountain fault in the eastern California shear zone. *Journal of Geophysical Research*, 115(B9), B09408.
- Hamling, I. J., Wright, T. J., Calais, E., Lewi, E., & Fukahata, Y. (2014). InSAR observations of post-rifting deformation around the Dabbahu rift segment, Afar. *Ethiopia. Geophysical Journal International*, 197(1), 33–49.
- Hanssen, R. F. (2001). *Radar interferometry: Data interpretation and analysis*. Norwell, MA, US: Kluwer Academic.
- Heiken, G. (1978). Plinian-type eruptions in the Medicine Lake Highland, California, and the nature of the underlying magma. *Journal of Volcanology and Geothermal Research*, 4(3), 375–402.
- Hildreth, W. (2007). Quaternary magmatism in the Cascades - geological perspectives. U.S. Geological Survey Professional Paper (1744).
- Hooper, A., Segall, P., & Zebker, H. (2007). Persistent scatterer interferometric synthetic aperture radar for crustal deformation analysis, with application to Volcán Alcedo. *Galápagos. Journal of Geophysical Research*, 112(B7), B07407.
- Hooper, A., Pedersen, R., & Sigmundsson, F. (2009). *Constraints on magma intrusion at Eyjafjallajökull and Katla volcanoes in Iceland, from time series SAR interferometry. The VOLUME project-volcanoes: understanding subsurface mass movement* (pp. 13–24) Dublin: University College.

- Hooper, A., Zebker, H., Segall, P., & Kampes, B. (2004). A new method for measuring deformation on volcanoes and other natural terrains using InSAR persistent scatterers. *Geophysical Research Letters*, 31(23), 1–5.
- Johanson, I. A., & Bürgmann, R. (2005). Creep and quakes on the northern transition zone of the San Andreas fault from GPS and InSAR data. *Geophysical Research Letters*, 32(14), L14306.
- Jónsson, S., Zebker, H., Segall, P., & Amelung, F. (2002). Fault slip distribution of the 1999 Mw 7.1 Hector Mine, California, earthquake, estimated from satellite radar and GPS measurements. *Bulletin of the Seismological Society of America*, 92(4), 1377–1389.
- Li, Z. W., Ding, X. L., Huang, C., Wadge, G., & Zheng, D. W. (2006b). Modeling of atmospheric effects on InSAR measurements by incorporating terrain elevation information. *Journal of Atmospheric and Solar-Terrestrial Physics*, 68(11), 1189–1194.
- Lohman, R., & Simons, M. (2005). Some thoughts on the use of InSAR data to constrain models of surface deformation: Noise structure and data downsampling. *Geochemistry, Geophysics, Geosystems*, 6(1), Q01007.
- Lowenstern, J. B., Donnelly-Nolan, J., Wooden, J. L., & Charlier, B. L. A. (2003). Volcanism, plutonism and hydrothermal alteration at Medicine Lake volcano, California. *Proceedings, Twenty-Eighth Workshop on Geothermal Reservoir Engineering, Stanford University, Stanford, California* (p. 8).
- Lu, Z., & Dzurisin, D. (2014). *InSAR Imaging of Aleutian Volcanoes: Monitoring a Volcanic Arc from Space*. Chichester, UK: Springer-Praxis.
- Lyons, S., & Sandwell, D. (2003). Fault creep along the southern San Andreas from InSAR, permanent scatterers and stacking. *Journal of Geophysical Research*, 108(B1), 2047–2070.
- Massonnet, D., Feigl, K. L., Vadon, H., & Rossi, M. (1996). Coseismic deformation field of the M = 6.7 Northridge, California earthquake of January 17, 1994 recorded by two radar satellites using interferometry. *Geophysical Research Letters*, 23(9), 969–972.
- Mogi, K. (1958). Relations between eruptions of various volcanoes and the deformations of the ground surfaces around them. *Bulletin of the Earthquake Research Institute of the University of Tokyo*, 36, 99–134.
- Ofeigsson, B. G., Hooper, A., Sigmundsson, F., Sturkell, E., & Grapenthin, R. (2011). Deep magma storage at Hekla volcano, Iceland, revealed by InSAR time series analysis. *Journal of Geophysical Research*, 116(B5), B05401.
- Okada, Y. (1985). Surface deformation due to shear and tensile faults in a half-space. *Bulletin of the Seismological Society of America*, 75(4), 1135–1154.
- Parks, M. M., Biggs, J., Mather, T. A., Pyle, D. M., Amelung, F., Monsalve, M. L., et al. (2011). Co-eruptive subsidence at Galeras identified during an InSAR survey of Colombian volcanoes (2006–2009). *Journal of Volcanology and Geothermal Research*, 202(3), 228–240.
- Pinel, V., Hooper, A., De la Cruz-Reyna, S., Reyes-Davila, G., Doin, M.-P., & Bascou, P. (2011). The challenging retrieval of the displacement field from InSAR data for andesitic stratovolcanoes: Case study of Popocatepetl and Colima Volcano, Mexico. *Journal of Volcanology and Geothermal Research*, 200(1), 49–61.
- Poland, M. P., & Lu, Z. (2008). Radar interferometry observations of surface displacements during pre- and co-eruptive periods at Mount St. Helens, Washington, 1992–2005. *U.S. geological survey professional paper* (Vol. 1750, pp. 361–382).
- Poland, M. P., Bürgmann, R., Dzurisin, D., Lisowski, M., Masterlark, T., Owen, S., et al. (2006). Constraints on the mechanism of long-term, steady subsidence at Medicine Lake volcano, northern California, from GPS, levelling and InSAR. *Journal of Volcanology and Geothermal Research*, 150(1), 55–78.
- Pyle, D. M., Mather, T. A., & Biggs, J. (2013). Remote sensing of volcanoes and volcanic processes: Integrating observation and modelling-introduction. *Geological Society, London, Special Publications*, 380(1), 1–13.
- Riddick, S. N., & Schmidt, D. A. (2011). Time-dependent changes in volcanic inflation rate near three sisters, Oregon, revealed by InSAR. *Geochemistry, Geophysics, Geosystems*, 12(12), Q12005.

- Riddick, S. N., Schmidt, D. A., & Deligne, N. I. (2012). An analysis of terrain properties and the location of surface scatterers from persistent scatterer interferometry. *ISPRS Journal of Photogrammetry and Remote Sensing*, 73, 50–57.
- Ritter, J. R. R., & Evans, J. R. (1997). Deep structure of Medicine Lake volcano. *California. Tectonophysics*, 275(1), 221–241.
- Rosen, P., Hensley, S., Peltzer, G., & Simons, M. (2004). Updated repeat orbit interferometry package released. *EOS, Transactions of the AGU*, 85(5), 47.
- Rosen, P. A., Hensley, S., Zebker, H. A., & Webb, F. H. (1996). Surface deformation and coherence measurements of Kilauea Volcano, Hawaii, from SIR-C radar interferometry. *Journal of Geophysical Research*, 101(E10), 23109–23125.
- Rosen, P. A., Hensley, S., Joughin, I. R., Li, F. K., Madsen, S. N., Rodriguez, E., et al. (2000). Synthetic aperture radar interferometry. *Proceedings of the IEEE*, 88(3), 333–382.
- Segall, P. (2010). *Earthquake and volcano deformation*. Princeton, New Jersey, US: Princeton University Press.
- Seymour, M., & Cumming, I. (1994). *Maximum likelihood estimation for SAR interferometry*. Institute of Electrical and Electronics Engineers, Piscataway, NJ (pp. 2272–2275).
- Sparks, R. S. J., Biggs, J., & Neuberg, J. W. (2012). Monitoring volcanoes. *Science*, 335(6074), 1310–1311.
- Turcotte, D. L., & Schubert, G. (1982). *Geodynamics*. Cambridge, UK: Cambridge University Press.
- Wadge, G., Zhu, M., Holley, R. J., James, I. N., Clark, P. A., Wang, C., et al. (2010). Correction of atmospheric delay effects in radar interferometry using a nested mesoscale atmospheric model. *Journal of Applied Geophysics*, 72(2), 141–149.
- Wang, H., & Wright, T. J. (2012). Satellite geodetic imaging reveals internal deformation of western Tibet. *Geophysical Research Letters*, 39(7), L07303.
- Wang, H., Wright, T. J., & Biggs, J. (2009). Interseismic slip rate of the northwestern Xianshuihe fault from InSAR data. *Geophysical Research Letters*, 36(3), L03302.
- Wang, H., Wright, T. J., Yu, Y., Lin, H., Jiang, L., Li, C., et al. (2012). InSAR reveals coastal subsidence in the Pearl River Delta. *China. Geophysical Journal International*, 191(3), 1119–1128.
- Wright, T., Lu, Z., Wicks, C. (2004a) Constraining the slip distribution and fault geometry of the Mw 7.9, 3 November 2002, Denali Fault earthquake with interferometric synthetic aperture radar and Global Positioning System Data. *Bulletin of the Seismological Society of America*, 94(6B), S175–S189.
- Wright, T. J., Parsons, B. E., & Lu, Z. (2004b). Toward mapping surface deformation in three dimensions using InSAR. *Geophysical Research Letters*, 31(1), L01607.
- Zebker, H. A., & Villasenor, J. (1992). Decorrelation in interferometric radar echoes. *IEEE Transactions on Geoscience and Remote Sensing*, 30(5), 950–959.
- Zebker, H., Rosen, P., & Goldstein, R. M. (1994). On the derivation of co-seismic displacement fields using differential radar interferometry: The Landers earthquake. *Journal of Geophysical Research*, 99(B10), 19617–19634.
- Zucca, J. J., Fuis, G. S., Milkereit, B., Mooney, W. D., & Catchings, R. D. (1986). Crustal structure of northeastern California. *Journal of Geophysical Research*, 91(B7), 7359–7382.

InSAR Observations of Ground Deformation

Application to the Cascades Volcanic Arc

Parker, A.L.

2017, XVII, 165 p. 42 illus., 15 illus. in color., Hardcover

ISBN: 978-3-319-39033-8