

Some Geophysical Applications with Finite Volume Solvers of Two-Layer and Two-Phase Systems

E.D. Fernández-Nieto

Abstract There exists in the literature a huge range of geophysical applications that have been modeled through two-layer or two-phase models. In this work first some averaged two-layer and two-phase models are presented. We focus on applications to submarine avalanches, debris flows and sediment transport in rivers. Secondly, their numerical approximation by a finite volume method is discussed and a numerical test is presented.

Keywords Saint-Venant model · Two-layer · Two-phase · Finite volume · Well-balanced

MSC (2010) 35L40 · 35L65 · 65Z05 · 76T25

1 Introduction

In these notes firstly we describe several depth-averaged models which have been presented in the bibliography to study submarine avalanches, debris flows and sediment transport problems. Secondly, we describe a well-balanced finite volume solver to approximate the solution of the models.

There are several difficulties related to the discretization of these systems, which can be written under the structure of a hyperbolic system with a conservative term, a non-conservative product and source terms. Some of the difficulties to discretize these systems are the following: (i) in some models the flux function not only depend on the vector of unknowns, but it can also depend on a given function. (ii) the coupling term between the layers or the phases is usually written as a non-conservative product. Then, it is not well defined as a distribution and the choice of a family of paths is

These notes are part of several joint works with F. Bouchut, M.J. Castro Díaz, A. Mangeney, T. Morales de Luna and G. Narbona-Reina.

E.D. Fernández-Nieto (✉)

University of Seville, 2 Av. Reina Mercedes, 41012 Seville, Spain

e-mail: edofer@us.es

© Springer International Publishing AG 2017

C. Cancès and P. Omnes (eds.), *Finite Volumes for Complex*

Applications VIII—Methods and Theoretical Aspects, Springer Proceedings
in Mathematics & Statistics 199, DOI 10.1007/978-3-319-57397-7_2

necessary (see [3]). (iii) the source terms are defined in terms of the fixed topography. (iv) all the models considered in this work include a source term corresponding to a Coulomb friction law. One of the difficulties of this term is that it is multi- evaluated for the case of a material at rest.

The notes are organized as what follows: In Sect. 2 we describe the model proposed in [4] to study submarine avalanches. In Sect. 3 a model to study debris flows is presented. Section 4 is devoted to detail the influence of the Coulomb friction term in sediment transport models. In Sect. 5 a finite volume method that can be used to discretize these models is presented. In Sect. 6 we present a numerical test. And in Sect. 7 some conclusions and perspectives.

2 A Depth-Averaged Model for Submarine Avalanches

Some submarine avalanches can be produced by a collapse of the sediment layer. This can be produced in areas near the coast with a high bathymetry gradient and with a high amount of sedimentation. That can be produced for example near a river mouth. A high concentration of sediment at the bed can be also destabilized with a small earthquake. In some cases the evolution of the sediment layer can degenerate to a submarine avalanche which produces finally a tsunami. In some other cases an aerial avalanche near the coast or a lake can produce a tsunami. In [4] it is proposed a two-layer SWE system where the submarine avalanche and the eventual generated tsunami can be studied. The first layer corresponds to the fluid and the second one to the sediment layer. Heinrich et al. proposed also a two-layer SWE [8] but without taking into account the effects of the fluid on the landslide dynamics, the sea-bottom deformation induced by the landslide is used as input data in the tsunami model.

For the sediment layer a Savage–Hutter type model is considered. The pionering work of Savage–Hutter [15] derives a model to describe granular flows over a slopping plane based on Mohr–Coulomb considerations: a Coulomb friction law is assumed to reflect the avalanche/bottom interaction and the normal stress tensor is defined by a constitutive law relating the longitudinal and the normal stresses through a proportionality factor.

One of the characteristics of the model proposed in [4] is that the definition of the Coulomb friction term takes into account buoyancy effects, because we are studying submarine avalanches. Another characteristic is that, depending on the aspect ratio between the water density and the sediment density, the movement of the sediment avalanche can be more or less influenced by the presence of the fluid. The submarine avalanches produce a movement on the fluid layer, whose consequence can be a tsunami.

With index 1 is denoted the upper layer, composed of a homogeneous inviscid fluid of constant density ρ_1 , and with index 2 the grain layer of density

$$\rho_2 = (1 - \psi_0)\rho_s + \psi_0\rho_1,$$

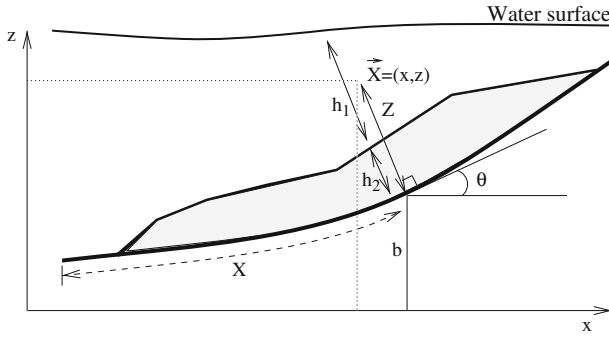


Fig. 1 Two-layer: local coordinates

where ρ_s is the grain density and ψ_0 is the porosity of the layer. Let us remark that this definition corresponds to the case in which the grain layer is fully immersed, where we suppose that the pores in the grain layer are filled with the fluid of the upper layer. Otherwise, if we consider a test of an aerial avalanche that enters into a fluid, the value of ρ_2 is variable in space. Its definition is discontinuous at the interface between the aerial and the submarine avalanche.

The model is described in local coordinates over a non-erodible bottom (See Fig. 1). Then, h_1 and h_2 denote the thickness of the fluid and grain layers, respectively, measured orthogonally to the bottom. U_i , $i = 1, 2$, is the velocity parallel to the bottom and W_i , $i = 1, 2$, is the velocity perpendicular to the bottom, with i referring to layers 1 and 2.

Then, the model is defined by the following set of equations:

$$\left\{ \begin{array}{l} \partial_t h_1 + \partial_X (h_1 U_1) = 0, \\ \partial_t (h_1 \bar{U}_1) + \partial_X \left(h_1 U_1^2 + g \frac{h_1^2}{2} \cos \theta \right) = -g h_1 d_X b + g \sin \theta d_X \theta \frac{h_1^2}{2} - \\ \quad - g h_1 \partial_X (\cos \theta h_2) + \frac{1}{\rho_1} \text{fric}(U_1, U_2), \\ \partial_t h_2 + \partial_X (h_2 U_2) = 0, \\ \partial_t (h_2 U_2) + \partial_X \left(h_2 U_2^2 + g \frac{h_2^2}{2} \cos \theta (r \lambda_2 + K(1 - r \lambda_2)) \right) = -g h_2 d_X b - \\ \quad - r g h_2 (\lambda_1 + K(1 - \lambda_1)) \partial_X (h_1 \cos \theta) - \frac{1}{\rho_2} \text{fric}(U_1, U_2) + g \frac{h_2^2}{2} \sin \theta d_X \theta + \mathcal{T}, \end{array} \right. \quad (1)$$

the term $\text{fric}(U_1, U_2)$ models the friction between the two layers. It is proportional to the relative velocity between the layers and the harmonic average of $\rho_1 h_1$ and $\rho_2 h_2$

(see [16] and references therein). The term \mathcal{T} is defined by a Coulomb friction law (see [15]). We observe that this term must be understood as (see [9]):

$$\text{If } |\mathcal{T}| \geq \sigma_c \Rightarrow \mathcal{T} = -(g(1-r)h_2 \cos \theta + h_2 U_2^2 d_X \theta) \frac{U_2}{|U_2|} \tan \delta_0, \quad (2)$$

$$\text{If } |\mathcal{T}| < \sigma_c \Rightarrow U_2 = 0, \quad (3)$$

where $\sigma_c = g(1-r)h_2 \cos \theta \tan \delta_0$. The density aspect ratio is denoted by $r = \rho_1/\rho_2$, where ρ_1 is the density of the fluid and ρ_2 is the density of the mixture sediment layer. Note that the definition of r can be variable in space and time in the case of tsunamis produced by aerial avalanches near the coast.

3 Depth-Averaged Models for Debris Flows


One of the simplifications considered in the model presented in previous sections is done on the mixture sediment layer. Instead to consider a two-phase model it is simulated as a one-layer where the solid and fluid phases move at the same velocity. Moreover the porosity is considered to be constant. An improvement of the previous model is to couple the fluid layer with a two-phase model for the mixture sediment layer. Two-phase models are also considered to study debris flows.

A two-phase depth averaged model was proposed by Pitman and Le in [14], and reformulated by Pelanti et al. in [13]. One of the difficulties of two-phase models is the definition of a closure relation. In these model the closure was related to the pressure at the free surface of the mixture layer. Being the problem that this closure does not imply that the model has a dissipative energy. In [1] a two-phase model has been proposed with a dissipative energy balance.

The model proposed in [1] can be rewritten in terms of the solid pressure at the free surface, the fluid pressure at the free surface, the solid pressure at the bed, or the fluid pressure at the bed. This extra unknown can be seen as a Lagrangian multiplier associated to the closure relation, that is the incompressibility of the solid phase. Although all the reformulations are equivalent, from the numerical point of view we propose to rewrite the model in terms of the solid pressure at the free surface. Because, by considering a projection method at the first step the hyperbolic model has better properties.

In order to work in a framework well suited to avalanches problems it is interesting to write the model in local coordinates. In previous section we have described the model in local coordinates over a variable non-erodible bottom. Another possibility is the one considered in [1]. The model is written in an inclined plane frame. Thus, we consider a fixed slope with constant angle θ with respect to the horizontal, $-\pi/2 < \theta < \pi/2$, and the coordinates (x, z) are respectively tangent to and normal to this slope, the x axis being along the steepest direction, and the y axis being horizontal (see Fig. 2).

Fig. 2 Local coordinates on a plane of reference and bathymetry

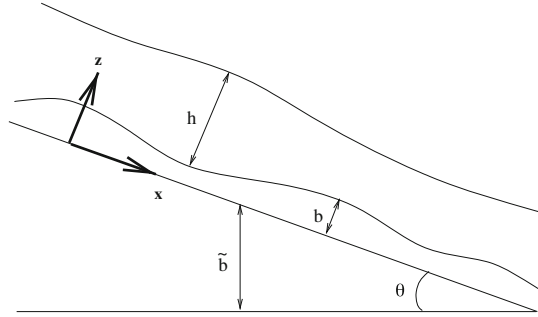

Then, for a given bathymetry, firstly a reference plane is defined, by taking into account the mean slope of the domain. We denote this plane by $\tilde{b}(x)$. Secondly, by a projection of the bathymetry on this reference plane we define $b(x)$.

We consider a bottom topography $b(x)$, and a thin layer of material over it with thickness $h(t, x)$. The material thus occupies the domain

$$b(x) < z < b(x) + h(t, x).$$

By denoting by ψ the solid pressure at the free surface divided by the solid density, the two-phase system can be written as follows:

$$\partial_t(h\varphi) + \partial_x(h\varphi v) = 0, \quad (4a)$$

$$\partial_t(h(1 - \varphi)) + \partial_x(h(1 - \varphi)u) = 0, \quad (4b)$$

$$\begin{aligned} \partial_t(h\varphi v) + \partial_x(h\varphi v^2) = & -h(1 - \varphi)\partial_x\psi - \varphi gh \cos \theta \partial_x(\tilde{b} + b + h) \\ & - \frac{1}{2}(1 - r_m)gh^2 \cos \theta \partial_x\varphi \\ & - \varphi gh \sin \theta + \beta h(u - v), \\ & + \mathcal{T}, \end{aligned} \quad (4c)$$

$$\begin{aligned} \partial_t(h(1 - \varphi)u) + \partial_x(h(1 - \varphi)u^2) = & \frac{h}{r} (1 - \varphi) \partial_x\psi - (1 - \varphi)gh \cos \theta \partial_x(\tilde{b} + b + h) \\ & - (1 - \varphi)gh \sin \theta - \frac{1}{r_m}\beta h(u - v), \end{aligned} \quad (4d)$$

$$\partial_x(h(1 - \varphi)(u - v)) = 0. \quad (4e)$$

As in the model presented in previous section the term \mathcal{T} denotes the contribution in the model of the Coulomb friction law. In this case it is defined as follows:

$$\text{If } |\mathcal{T}| \geq \sigma_{c,m} \Rightarrow \mathcal{T} = -g \cos \theta (1 - r_m) h \varphi \tan \delta_0 \frac{v}{|v|}, \quad (5)$$

$$\text{If } |\mathcal{T}| < \sigma_{c,m} \Rightarrow v = 0, \quad (6)$$

where $\sigma_{c,m} = g \cos \theta (1 - r_m) h \varphi \tan \delta_0$.

The velocities are denoted by v for the solid phase and u for the fluid phase. Moreover, β is the friction coefficient between the phases and r_m is the density aspect ratio in the mixture layer, $r_m = \rho_f / \rho_s$, begin ρ_f the fluid density. Let us remark that by coupling this model with the one presented in previous section we have $\rho_f = \rho_1$. Moreover the weight of the upper fluid layer on the mixture layer can be directly imposed in the definition of ψ .

A depth-averaged two-phase model including dilatancy effects has been proposed in [2]. It can be seen as an extension with slope aligned variable dependency of the model proposed in [10] (see also [7]).

4 Sediment Transport: Influence of the Coulomb Friction Law

Finally, let us present a simplified version of one of the models deduced in [6]. It has been deduced through an asymptotic analysis, and a coupling between a Shallow Water system for the fluid layer with a Reynolds equation to model the evolution of the sediment layer.

Interestingly, this model can be deduced under very similar assumptions than that of the model presented in Sect. 2 for submarine avalanches. The main difference is the characteristic time at which moves the sediment layer. For the case of sediment transport in rivers or coastal areas the time scale of the movement of the sediment bed is very different from the one of the fluid layer. The second main part in the deduction of this model is the definition of the friction term between the fluid and the sediment layer. The friction coefficient is defined in terms of the ratio between the Coulomb friction angle and the critical Shield parameter. The main difference with the submarine avalanche model is that in this case we do not consider local coordinates, it is enough to write the model in cartesian coordinates. While for the case of avalanches model it is crucial to consider some kind of local coordinates, as the ones presented in previous sections.

For this model index 1 denotes again the fluid layer and index 2 the sediment layer. For the case of quasi-uniform flows the model can be written under the form of a SWE system as follows (for more details see [6]):

$$\begin{cases} \partial_t h_1 + \partial_x (h_1 u_1) = 0, \\ \partial_t q_1 + \partial_x (h_1 u_1^2) + \frac{1}{2} g \partial_x h_1^2 + g h_1 \partial_x (b + h_2) + \frac{g h_m}{r} \mathcal{P} = 0, \\ \partial_t h_2 + \partial_x \left(h_2 v_b \sqrt{(1/r - 1) g d_s} \right) = 0, \end{cases} \quad (7)$$

with

$$\mathcal{P} = \nabla_x (r h_1 + h_2 + b) + (1 - r) \operatorname{sgn}(u_2) \tan \delta_0. \quad (8)$$

Instead to have a momentum equation for the sediment layer, the velocity of the sediment layer is deduced from the asymptotic analysis, it is defined by $v_b \sqrt{(1/r - 1)gd_s}$. The main part in the deduction of the non-dimensional bedload velocity v_b is the friction coefficient that defines the friction law between the fluid layer and sediment layer. It has to depend on $\tan \delta_0$, δ_0 being the same friction angle that defines the Coulomb friction law of the models presented in previous sections for the case of submarine avalanches and debris flows. For the case of a linear friction law between the fluid and the sediment v_b is defined as follows:

$$v_b = \frac{1}{\sqrt{(1/r - 1)gd_s}} u_1 - \frac{\vartheta}{1 - r} \mathcal{P}, \quad (9)$$

where $\vartheta = \theta_c / \tan \delta_0$.

Note that the sign of the velocity of the sediment layer, $\text{sgn}(u_2)$, has still to be defined. Observe that this coefficient comes from the contribution of the Coulomb friction law at the interface between moving and static sediment particles (see (8)). In order to specify the sign of u_2 , it is necessary to note that Coulomb friction force has the same sign as the net force acting on the sediment. In fact, note that the definition of \mathcal{T} in the models presented in the two previous sections can be reinterpreted in this way. That is, \mathcal{T} is defined in such a way that the contribution of the Coulomb friction term does not change the sign of the velocity of the layer without this contribution. From the definition of \mathcal{T} we obtain the definition of $\text{sgn}(u_2)$ for this model corresponding to sediment transport. Concretely, for this model we have

$$\text{sgn} \left(\frac{\vartheta h_m}{1 - r} (1 - r) \text{sgn}(u_2) \tan \delta \right) = \text{sgn} \left(\frac{h_m u_1}{\sqrt{(1/r - 1)gd_s}} - \frac{\vartheta h_m}{1 - r} \partial_x (rh_1 + h_2 + b) \right).$$

Then, using that $\vartheta = \theta_c / \tan \delta_0$,

$$\text{sgn}(u_2) = \text{sgn} \left(\frac{u_1}{\sqrt{(1/r - 1)gd_s}} - \frac{\vartheta}{1 - r} \partial_x (rh_1 + h_2 + b) \right). \quad (10)$$

5 Well-Balanced Finite Volume Methods

In this section we present a finite volume method that can be considered to discretize the models presented in previous sections, that is for submarine avalanches, debris flows and sediment transport. The common parts of all these models are the presence of nonconservative products, geometric source terms, and a Coulomb friction law.

Concretely, all the models presented previously can be written under the form of a hyperbolic system with a conservative product, a non-conservative term and source terms with the following structure:

$$\partial_t W + \partial_x F(\theta, W) = G_1(x, W) \partial_x b + G_2(x, W) \partial_x \theta + B(W) \partial_x W + T. \quad (11)$$

For the case of the model presented in Sect. 3 this corresponds to the first step in the projection method that we can consider to approximate the Lagrangian multiplier associated to the restriction of incompressibility of the solid phase.

The only model for which the flux function depends on a function $\theta = \theta(x)$ is the case of submarine avalanches. Because it is written in local coordinates on a given non-erodible bathymetry.

The source terms modeling the friction between the two layers or the two phases are discretized semi-implicitly (see [13]). Then, we do not detail it in the finite volume discretization.

For the discretization of the system, computing cells $I_i = [x_{i-1/2}, x_{i+1/2}]$ are considered. For simplicity, we suppose that these cells have constant size Δx . Let us define $x_{i+\frac{1}{2}} = i\Delta x$ and by $x_i = (i - 1/2)\Delta x$, the center of the cell I_i . Let Δt be the constant time step and define $t^n = n\Delta t$.

We denote by W_i^n the approximation of the cell averages of the exact solution provided by the numerical scheme.

The discretization of $B(W)\partial_x W$ firstly requires to interpret this term as a Borel measure (see [3]), depending on the choice of a family of paths linking given states. Here the family of segments are considered as in [12].

The dependence of the flux function on $\theta(x)$, makes it difficult to obtain the desired exact well-balanced property for water at rest. That is, to preserve exactly the stationary solution of the system with zero velocity. For the case of the submarine avalanche model it is helpful to define the flux function $F(\theta, W)$ as a function of $\cos \theta$ and $\cos^2 \theta$ (see [4] for more details).

Finally, as mentioned before, the discretization of the source term $T(W)$ corresponding to the Coulomb friction term is crucial to simulate properly the landslides for the case of submarine avalanches and debris flows. For the sediment transport model, its discretization implies that the sediment moves only when the friction is greater than a threshold. We propose a two-step numerical scheme to treat the Coulomb friction term.

Let us suppose that the values W_i^n are known. In order to advance in time we proceed as follows:

• **First Step.** Let us denote the unknown approximation as $W_i^* = [H_{1,i}^* \ Q_{1,i}^* \ H_{2,i}^* \ Q_{2,i}^*]^T$. For the case of the sediment transport model we do not have the unknown Q_2 .

$$W_i^* = W_i^n - \frac{\Delta t}{\Delta x} (\mathcal{D}\mathcal{F}_{i-1/2}^{n,+} + \mathcal{D}\mathcal{F}_{i+1/2}^{n,-}), \quad (12)$$

where $\mathcal{D}\mathcal{F}_{i+1/2}^{n,\pm} = \mathcal{D}\mathcal{F}_{i+1/2}^{\pm}(W_i^n, W_{i+1}^n)$ are the generalized Roe flux difference computed using a family of segments (see [11, 12]).

$$\begin{aligned} \mathcal{D}\mathcal{F}_{i+1/2}^{\pm} = & \frac{1}{2} \{ (F(\theta_{i+1/2}, W_{i+1}) - F(\theta_{i+1/2}, W_i) + \partial_{\theta} F(\theta_{i+1/2}, W_{i+1/2})(\theta_{i+1} - \theta_i) \\ & + G_{1,i+1/2}(b_{i+1} - b_i) + G_{2,i+1/2}(\theta_{i+1} - \theta_i) \\ & \pm P_{i+1/2}[\mathcal{A}_{i+1/2}(W_{i+1} - W_i) + \partial_{\theta} F(\theta_{i+1/2}, W_{i+1/2})(\theta_{i+1} - \theta_i) \\ & + G_{1,i+1/2}(b_{i+1} - b_i) + G_{2,i+1/2}(\theta_{i+1} - \theta_i) - T_{i+1/2}\Delta x] \}, \end{aligned}$$

where $G_{1,i+1/2}$, $G_{2,i+1/2}$ and $T_{i+1/2}$ are approximations at the interface $i + 1/2$ of the corresponding source terms. And matrix $P_{i+1/2}$ is an approximation of the sign of the Roe matrix $A_{i+1/2}$ (see [11, 12]).

For the three models presented in this note we consider the same kind of numerical diffusion, which is based on the IFCP method (Intermediate Field Capturing Parabola method) introduced in [5].

Matrix $P_{i+1/2}$ is defined as follows:

$$P_{i+1/2} = \alpha_0 C_{i+1/2} + \alpha_1 I + \alpha_2 A_{i+1/2},$$

where, I is the identity matrix and $C_{i+1/2}$ is an approximation of the inverse of $A_{i+1/2}$. The well-balanced properties of the scheme depend on this approximation. For example, if we are only interested into preserving exactly stationary solutions at rest it is enough to defined $C_{i+1/2}$ as the inverse matrix of $A_{i+1/2}$ evaluated with zero velocity.

The coefficients α_0 , α_1 and α_2 are the solutions of the following linear system

$$\begin{pmatrix} 1 & \lambda_{ext}^- & (\lambda_{ext}^-)^2 \\ 1 & \lambda_{ext}^+ & (\lambda_{ext}^+)^2 \\ 1 & \chi_{int} & \chi_{int}^2 \end{pmatrix} \begin{pmatrix} \alpha_0 \\ \alpha_1 \\ \alpha_2 \end{pmatrix} = \begin{pmatrix} |\lambda_{ext}^-| \\ |\lambda_{ext}^+| \\ |\chi_{int}| \end{pmatrix},$$

where

$$\chi_{int} = \text{sgn}(\lambda_{ext}^- + \lambda_{ext}^+) \max(|\lambda_{int}^-|, |\lambda_{int}^+|).$$

For the models corresponding to the submarine avalanches model and for debris flows we have four eigenvalues associated to the Roe matrix, two externals and two internals, verifying

$$\lambda_{ext}^- < \lambda_{int}^- < \lambda_{int}^+ < \lambda_{ext}^+.$$

For the case of the sediment transport model we have only three eigenvalues, then we apply previous definition by identifying $\lambda_{int}^- = \lambda_{int}^+$, the intermediate eigenvalues.

• Second step.

For the case of submarine avalanches model and debris flows it is still necessary to introduce the approximation of the Coulomb friction term. For the case of the sediment transport model it is not necessary because it has been directly taken into

account in the definition of v_b , the non-dimensional bedload sediment transport, as described in Sect. 4.

We define $W_i^{n+1} = [H_{1,i}^* Q_{1,i}^* H_{2,i}^* Q_{2,i}^{n+1}]^T$ and

$$Q_{2,i}^{n+1} = \begin{cases} Q_{2,i}^* + \mathcal{F}_i^* \Delta t & \text{if } |Q_{2,i}^*| > \sigma_{c,i}^* \Delta t \\ 0 & \text{otherwise,} \end{cases} \quad (13)$$

This definition of $Q_{2,i}^{n+1}$ proposed is based on the numerical treatment of Coulomb friction term introduced by Mangeney et al. in [9]. Observe that the definition of the Coulomb term, implies that if $|T| < \sigma_c$ then $Q_2 = 0$.

6 Numerical Test

In this section we present a 2D test corresponding to the two-phase model presented in Sect. 3 with $\psi = 0$. In this test we do not consider friction between phases but we include a Coulomb friction law. We set a domain $[-2, 2] \times [-2, 2]$, discretized with 300×300 points. The bottom function is

$$b(x) = 0.2 + (x^2 + y^2)/80 + 5E^{-3} \sin(7(x^2 + y^2));$$

As initial condition we set $u_1(x, 0) = u_2(x, 0) = 0$ and (See Fig. 3a).

$$h(x, 0) = \begin{cases} 0.7 & \text{if } \sqrt{x^2 + y^2} \leq 0.5, \\ 0 & \text{otherwise,} \end{cases} \quad \psi(x, 0) = 0.5.$$

And we consider that the domain is closed, that is, we impose that $u \cdot \eta = 0$ at the boundaries of the domain, where η is the normal vector.

In Fig. 3 we present the evolution of the solution. In gray we picture the bottom and in brown the free surface, that is $z = b + h$. We also picture in blue the fluid surface when $\varphi = 1$, that is, in the areas where there is only the fluid phase.

In Fig. 3b we observe that there is an area where $\varphi = 1$. We plot this zone in blue. This area appears because the velocity of the fluid phase is bigger than the solid one. In this area the Two-phase model degenerates to the one layer Shallow Water equations. We observe as, after the reflection of the fluid in the boundaries, it enters again in the mixing of solid and fluid layer. This new source of fluid, traveling in opposite direction to the solid phase, modifies the profile of the mixing. After, a shock at the center of the domain is produced. Then, new waves coming from the center of the domain to the boundary are obtained. And finally the solution is stationary.

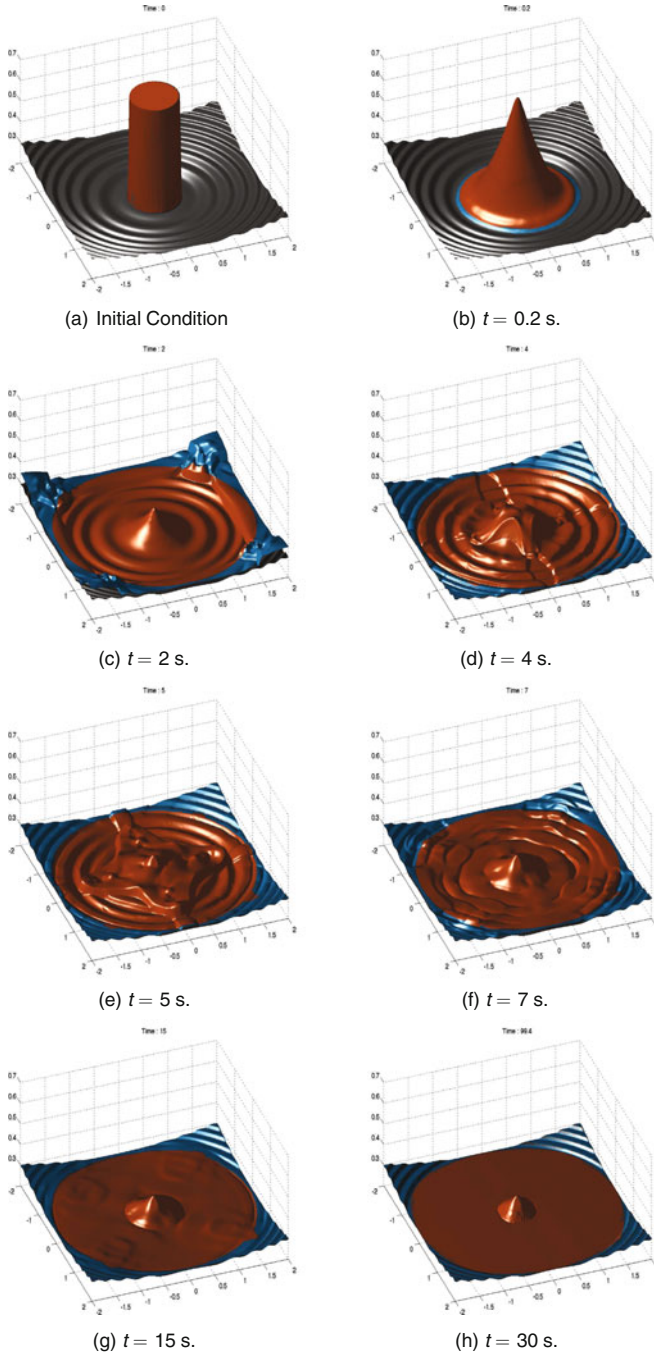


Fig. 3 Test 2D: Bottom ($z = b(x)$, gray), free surface ($z = b + h$, brown) and fluid free surface ($z = b + (1 - \varphi)h$, blue)

7 Conclusions

In this note three types of models has been presented. The common ingredient is the key feature of the Coulomb friction law in the system definition. For the case of submarine avalanches and debris flows it appears explicitly in the momentum equation of the granular phase. Moreover, the granular layer in the submarine avalanches model can be seen as a simplification of a two-phase model. In both cases, a key ingredient is the introduction of dilatancy effects (see [2, 7, 10]).

For the case of sediment transport the time scale of the movement of the sediment bed is very different from the one of the fluid layer. Then, usually this problem is studied as a coupling between the SWE system and a Reynolds equation. The key role of the Coulomb friction law appears in the definition of the critical Shields parameter. Which is the responsible to retain the sediment layer at rest if the friction with the fluid is not bigger enough (see [6]).

Finally, we have seen that the same finite volume solver, here we propose an adaptation of IFCP method (see [5]), can be considered for this three type models.

Acknowledgements This research has been partially supported by the Spanish Government and FEDER through the research projects MTM2015-70490-C2-1-R and MTM2015-70490-C2-2-R, by the ANR contract ANR-11-BS01-0016 LANDQUAKES, the USPC PEGES project and the ERC contract ERC-CG-2013-PE10-617472 SLIDEQUAKES.

References

1. Bouchut, F., Fernandez-Nieto, E.D., Mangeney, A., Narbona-Reina, G.: A two-phase shallow debris flow model with energy balance. *ESAIM. Math. Model. Numer. Anal.* **49**(1), 101–140 (2015)
2. Bouchut, F., Fernández-Nieto, E.D., Mangeney, A., Narbona-Reina, G.: A two-phase two-layer model for fluidized granular flows with dilatancy effects (2016)
3. Dal Maso, G., Lefloch, P.G., Murat, F.: Definition and weak stability of nonconservative products. *Journal de mathématiques pures et appliquées* **74**(6), 483–548 (1995)
4. Fernández-Nieto, E.D., Bouchut, F., Bresch, D., Diaz, M.C., Mangeney, A.: A new savage-hutter type model for submarine avalanches and generated tsunami. *J. Comput. Phys.* **227**(16), 7720–7754 (2008)
5. Fernández-Nieto, E.D., Díaz, M.C., Parés, C.: On an intermediate field capturing riemann solver based on a parabolic viscosity matrix for the two-layer shallow water system. *J. Sci. Comput.* **48**(1–3), 117–140 (2011)
6. Fernández-Nieto, E., de Luna, T.M., Narbona-Reina, G., Zabsonré, J.: Formal deduction of the saint-venant-exner model including arbitrarily sloping sediment beds and associated energy (2015). [arXiv:1506.05642](https://arxiv.org/abs/1506.05642)
7. George, D.L., Iverson, R.I.: A depth-averaged debris-flow model that includes the effects of evolving dilatancy. ii. numerical predictions and experimental tests. *Proc. R. Soc. A* **470**, 20130,820 (2014)
8. Heinrich, Ph, Piatanesi, A., Hebert, H.: Numerical modelling of tsunami generation and propagation from submarine slumps: the 1998 papua new guinea event. *Geophys. J. Int.* **145**, 97–111 (2001)

9. Mangeney-Castelnau A., Vilotte, J., Bristeau, M., Perthame B., Bouchut F., Simeoni, C., Yerneni, S.: Numerical modeling of avalanches based on saint venant equations using a kinetic scheme. *J. Geoph. Res.* **108**(1), B11, 2527 (2003)
10. Pailha, M., Pouliquen, O.: A two-phase flow description of the initiation of underwater granular avalanches. *J. Fluid Mech.* **633**, 115–135 (2009)
11. Parés, C.: Numerical methods for nonconservative hyperbolic systems: a theoretical framework. *SIAM J. Numer. Anal.* **44**(1), 300–321 (2006)
12. Parés, C., Castro, M.: On the well-balance property of roe’s method for nonconservative hyperbolic systems. Applications to shallow-water systems. *ESAIM. Math. Model. Numer. Anal.* **38**(5), 821–852 (2004)
13. Pelanti, M., Bouchut, F., Mangeney, A.: A roe-type scheme for two-phase shallow granular flows over variable topography. *ESAIM. Math. Model. Numer. Anal.* **42**(5), 851–885 (2008)
14. Pitman, E.B., Le, L.: A two-fluid model for avalanche and debris flows. *Phil. Trans. R. Soc. A* **363**, 1573–1601 (2005)
15. Savage, S.B., Hutter, K.: The dynamics of avalanches of granular materials from initiation to run-out. *Acta Mech.* **86**, 201–223 (1991)
16. Zabsonré, J.D., Narbona-Reina, G.: Existence of a global weak solution for a 2d viscous bi-layer shallow water model. *Nonlinear Anal. Real World Appl.* **10**(5), 2971–2984 (2009)

Finite Volumes for Complex Applications VIII - Methods
and Theoretical Aspects

FVCA 8, Lille, France, June 2017

Cancès, C.; Omnes, P. (Eds.)

2017, XII, 476 p. 74 illus., 52 illus. in color., Hardcover

ISBN: 978-3-319-57396-0