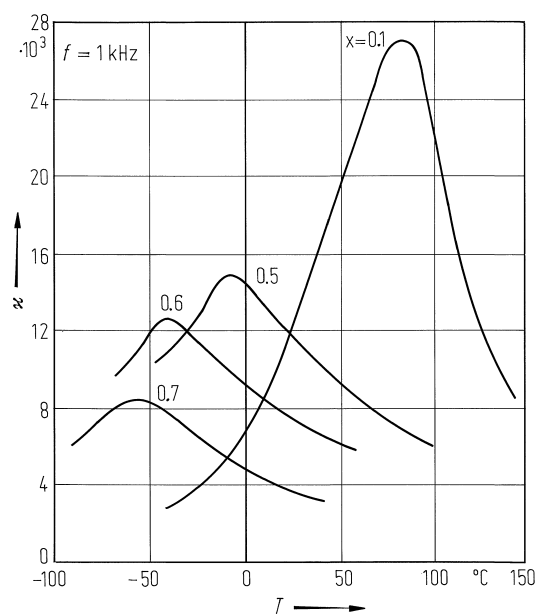


**No. 1C-b100  $\text{Pb}(\text{Fe}_{1/2}\text{Nb}_{1/2})\text{O}_3$ – $\text{Pb}(\text{Fe}_{2/3}\text{W}_{1/3})\text{O}_3$** **5a Dielectric constant: Fig. 1C-b100-001.**

**Fig. 1C-b100-001.**  $(1-x)\text{Pb}(\text{Fe}_{1/2}\text{Nb}_{1/2})\text{O}_3 \cdot x \text{Pb}(\text{Fe}_{2/3}\text{W}_{1/3})\text{O}_3$  (ceramics).  $\kappa$  vs.  $T$  [86Tak]. Parameter:  $x$ .  $f = 1$  kHz.

**Reference**

86Tak Takahara, H., Kikuchi, K.: Adv. Ceram. Mater. **1** (1986) 346.