

No. 1C-a7 NaNbO_3 – BaTiO_3

1b Phase diagram: Fig. 1C-a7-001.

5a Dielectric constant: Fig. 1C-a7-002.

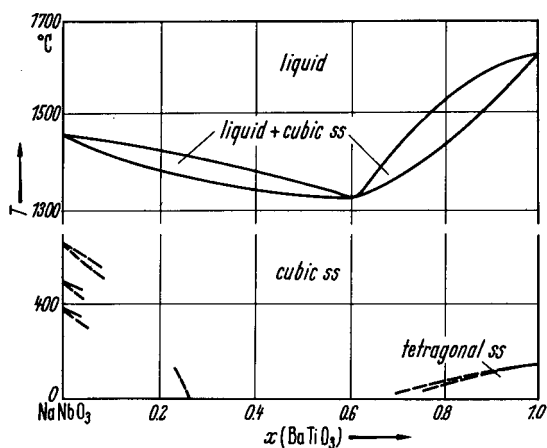


Fig. 1C-a7-001. $(1-x)\text{NaNbO}_3 \cdot x \text{BaTiO}_3$. Phase diagram [64Lev].

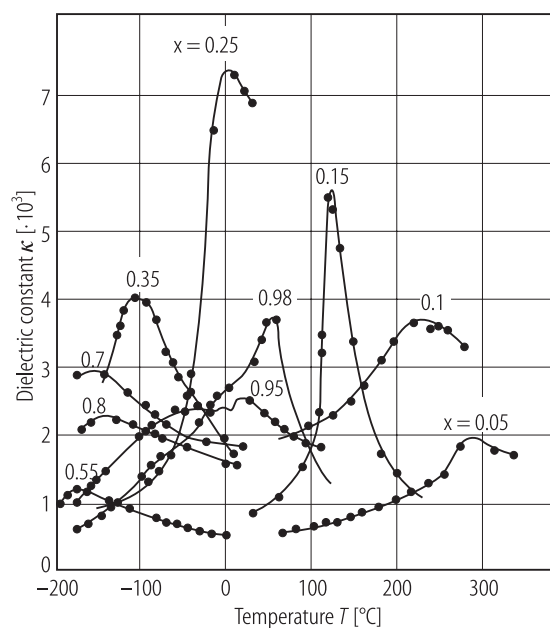


Fig. 1C-a7-002. $(1-x)\text{NaNbO}_3 \cdot x \text{BaTiO}_3$. κ vs. T [78Rae].
Parameter: x . $f = 1 \text{ kHz}$.

References

- 64Lev Levin, L.M., Robbino, C.R., McMurdie, H.: Phase Diagrams for Ceramists, Columbus, Ohio: American Ceramic Society, 1964.
- 78Rae Raevskii, I.P., Proskuryakoba, L.M., Pezinchenko, L.A., Zvorykina, E.K., Shilkina, L.A.: Izv. VUZ Fiz. **2** (1978) 152.

