
No. 1C-b37 $\text{PbTiO}_3\text{--Pb}(\text{Fe}_{1/2}\text{Nb}_{1/2})\text{O}_3$

3a	Lattice parameters: Fig. 1C-b37-001.	
5a	Effect of p on ferroelectric transition temperature: Fig. 1C-b37-002.	
11	Electrical resistivity: see	71Doi
16	Preparation of thin films by sol-gel method: see	91Kan

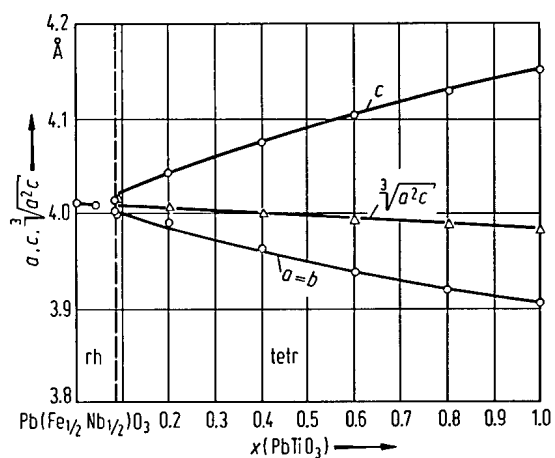


Fig. 1C-b37-001. $(1-x)\text{Pb}(\text{Fe}_{1/2}\text{Nb}_{1/2})\text{O}_3 \cdot x \text{PbTiO}_3$. a , c , $V^{1/3}$ vs. x [71Doi].

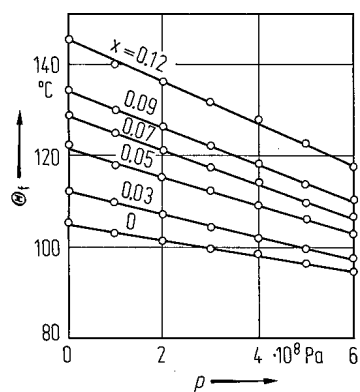


Fig. 1C-b37-002. $(1-x)\text{Pb}(\text{Fe}_{1/2}\text{Nb}_{1/2})\text{O}_3 \cdot x \text{PbTiO}_3$. Θ_f vs. p [70Pol]. Parameter: x .

References

- 70Pol Polandov, I.N., Lezhepekov, A.P., Didkovskaya, O.S., Klimov, V.V.: Fiz. Tverd. Tela **12** (1970) 3616; Sov. Phys. Solid State (English Transl.) **12** (1971) 2938.
71Doi Doi, K.: Master Thesis, Tokyo Institute of Technology, 1971.
91Kan Kang, J., Yoko, T., Sakka, S.: Jpn. J. Appl. Phys. **30** (1991) 2187.