

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

LOGIC SELECTION GUIDE

FIRST HALF 2005

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated

CONTACTS/INFORMATION

TI HOME PAGE

<http://www.ti.com>

TI LOGIC HOME PAGE

<http://www.ti.com/sc/logic>

TI MILITARY SEMICONDUCTOR HOME PAGE

<http://www.ti.com/sc/military>

PRODUCT INFORMATION CENTER

[http://focus.ti.com/general/
docs/contactus.jsp](http://focus.ti.com/general/docs/contactus.jsp)

DATA SHEETS

<http://www.ti.com/sc/logic>

Texas Instruments offers a full spectrum of logic functions and technologies from the mature to the advanced, including bipolar, BiCMOS, and CMOS. TI's process technologies offer the logic performance and features required for modern logic designs, while maintaining support for more traditional logic products. TI's offerings include products in the following process technologies or device families:

- AC, ACT, AHC, AHCT, ALVC, AUC, AUP, AVC, FCT, HC, HCT, LV-A, LV-AT, LVC, TVC
- ABT, ABTE, ALB, ALVT, BCT, HSTL, LVT, SSTL, SSTU, SSTV, SSTVF
- BTA, CB3Q, CB3T, CBT, CBT-C, CBTLV, FB, FIFO, GTL, GTLP, JTAG, PCA, PCF, VME
- ALS, AS, F, LS, S, TTL

TI offers specialized, advanced logic products that improve overall system performance and address design issues, including testability, low skew requirements, bus termination, memory drivers, and low-impedance drivers.

TI offers a wide variety of packaging options, including advanced surface-mount packaging in fine-pitch small-outline ball-grid-array (BGA) packages, quad flat no-lead (QFN) packages for gates and octals, and WCSP (NanoStar™/NanoFree™) packages for single-, dual-, and triple-gate functions. The NanoStar™/NanoFree™ packages are the newest logic options. These WCSP packages are the world's smallest logic packages offering a 70% savings in space over industry standard SC-70 packages.

For further information on TI logic families, refer to the list of current TI logic technical documentation provided in this preface. For an overview of TI logic, see Section 1. Sections 2, 3, 4, and 5 contain must-have product information, a product index, functional cross-reference, and device selection guide, respectively. These sections list the functions offered, package availability, and applicable literature numbers of data sheets. Appendix A includes additional information about packaging and symbolization. Appendix B provides a cross-reference to match other manufacturers' products to those of TI. Data sheets can be downloaded from the internet at <http://www.ti.com> or ordered through your local sales office or TI authorized distributor. Please see the back cover of this selection guide for additional information.

CURRENT TI LOGIC TECHNICAL DOCUMENTATION

Listed below is the current collection of TI logic technical documentation. These documents can be ordered through a TI representative or authorized distributor by referencing the appropriate literature number.

Document	Literature Number
ABT Logic Advanced BiCMOS Technology Data Book (1997)	SCBD002C
AC/ACT CMOS Logic Data Book (1997)	SCAD001D
AHC/AHCT Logic Advanced High-Speed CMOS Data Book (April 2000)	SCLD003B
AHC/AHCT Designer's Guide (February 2000)	SCLA013D
ALS/AS Logic Data Book (1995)	SDAD001C
ALVC Advanced Low-Voltage CMOS Data Book	SCED006B
AUC Advanced Ultra-Low-Voltage CMOS Data Book (January 2003)	SCED011A
AVC Advanced Very-Low-Voltage CMOS Data Book (March 2000)	SCED008C
BCT BiCMOS Bus-Interface Logic Data Book (1994)	SCBD001B
CBT (5-V) and CBTLV (3.3-V) Bus Switches Data Book (December 1998)	SCDD001B
Design Considerations for Logic Products Application Book (1997)	SDYA002
Design Considerations for Logic Products Application Book, Volume 2 (September 1999)	SDYA018
Design Considerations for Logic Products Application Book, Volume 3 (December 2000)	SDYA019
Digital Logic Pocket Data Book (January 2004)	SCYD013A
F Logic Data Book (1994)	SDFD001B
GTL/GTLP Logic High-Performance Backplane Drivers (September 2001)	SCED004A
HC/HCT Logic High-Speed CMOS Data Book (2003)	SCLD001E
Little Logic Data Book (November 2001)	SCED010
Logic Cross-Reference (May 2005)	SCYB017B
Logic Packaging Migration Card	SCYB006A
LVC and LV Low-Voltage CMOS Logic Data Book (1998)	SCBD152B
LVT Logic Low-Voltage Technology Data Book (1998)	SCBD154
Mobile Computing Logic Solutions Data Book (July 1999)	SCPD002
Semiconductor Group Package Outlines Reference Guide (1999)	SSYU001E
Signal Switch Including Digital/Analog/Bilateral Switches and Voltage Clamps Data Book (January 2004)	SCDD003A

See www.ti.com/sc/logic for the most current data sheets.

TABLE OF CONTENTS

SECTION 1 - LOGIC OVERVIEW	1-1
Welcome to the World of TI Logic	1-5
Product Life Cycle	1-6
Family Specification Comparison	1-7
Family Performance Positioning	1-10
CMOS Voltage Roadmap	1-11
CMOS Voltage vs. Speed	1-12
Selection of a Logic Family for a Particular Load	1-13
Device Names and Package Designators	1-14
Logic Vendor Partnerships	1-15
IC Basics	1-16
Logic Feature List	1-17
Bus-Hold Input	1-18
Series Damping Resistors	1-19
Partial Power Down	1-20
Hot Insertion	1-21
Live Insertion	1-22
Mixed-Voltage Interfacing	1-23
Dual-Supply Level Translators	1-24
What Is Little Logic?	1-25
TI Little Logic Portfolio	1-26
NanoStar™/NanoFree™ Package	1-27
AUC	1-28
AUP	1-29
ALVC Family	1-30
AVC Family	1-31
LVC Family	1-32
LV-A Family	1-33
LVT Family	1-34
ALVT Family	1-35
TI Signal Switch Product Overview	1-36
Digital Bus Switch: Description	1-37
Digital Bus Switch: Key Characteristics	1-38
Digital Bus Switch: Configurations	1-39
Digital Bus Switch: CBT	1-40
Digital Bus Switch: CBT-C	1-41
Digital Bus Switch: CBTLV	1-42
Digital Bus Switch: CB3Q	1-43
Digital Bus Switch: CB3T	1-44
Digital Bus Switch: r_{on} Characteristics	1-45
Digital Bus Switch Naming	1-46
Analog Switch: Families and Configurations	1-47
Specialty Switch: TL52055 Wide-Bandwidth, 2-Input, 1-Output, 3-Circuit Video Switch	1-48

SECTION 1 (continued)

TVC Translation Voltage Clamp	1-49
What is GTL/GTLP?	1-50
GTLP Is a Bidirectional Translator	1-51
GTLP and VME Are Specifically Designed for High-Performance Multi-Slot Parallel Backplanes	1-52
GTLP Distributed-Load Devices	1-53
SN74VMEH22501/A UBT	1-54
Packaging Options	1-55
TI FIFO Products	1-57
TI FIFO Product and Technology Roadmap	1-58
TI FIFOs Optimize System Performance	1-59
IEEE Std 1149.1 (JTAG) Boundary-Scan Logic	1-60
Current TI JTAG Product Offering	1-61
Typical System-Level Application	1-62
Typical JTAG Applications	1-64

SECTION 2 - MUST-HAVE PRODUCTS 2-1

What Are Must-Have Products	2-5
List of Must-Have Products	2-6
I ² C and Interface	2-7
Translation	2-8
Switches	2-9
Linear: Op-Amps	2-10
Linear: Power Management	2-11
New Product Priorities	2-12

SECTION 3 - PRODUCT INDEX 3-1

Buffers, Drivers, and Transceivers	3-5
Inverting Buffers and Drivers	3-5
Noninverting Buffers and Drivers	3-8
Parity Transceivers	3-11
Registered Transceivers	3-12
Standard Transceivers	3-13
Flip-Flops, Latches, and Registers	3-17
D-Type Flip-Flops (3-state)	3-17
D-Type Flip-Flops (non 3-state)	3-18
J-K Flip-Flops	3-19
D-Type Latches (3-state)	3-20
Other Latches	3-21
Shift Registers	3-21

TABLE OF CONTENTS (continued)

SECTION 3 (continued)

Gates	3-23
AND Gates	3-23
Configurable Gates	3-23
Exclusive-OR Gates	3-24
Exclusive-NOR Gates	3-24
NAND Gates	3-24
NOR Gates	3-26
OR Gates	3-26
I ² C Logic	3-27
I ² C Logic	3-27
Little Logic	3-27
Single Gates	3-27
Dual Gates	3-29
Triple Gates	3-30
MSI Functions	3-31
Arithmetic and Parity Functions	3-31
Adders	3-31
Arithmetic Logic Units	3-31
Parity Generators and Checkers	3-31
Counters	3-32
Binary Counters	3-32
Decade Counters	3-33
Decoders, Encoders, and Multiplexers	3-34
Data Selectors/Multiplexers	3-34
Decoders/Demultiplexers	3-36
Priority Encoders	3-37
Digital Comparators	3-37
Identity Comparators	3-37
Magnitude Comparators	3-37
Signal Switches	3-38
Analog Switches and Multiplexers	3-38
Digital Bus Exchange/Multiplexing Switches	3-39
Digital Bus Switches	3-40
Specialty Logic	3-41
Backplane Logic	3-41
Boundary-Scan (JTAG) Logic	3-43
Boundary-Scan (JTAG) Bus Devices	3-43
Boundary-Scan (JTAG) Support Devices	3-44
Bus-Termination Arrays and Networks	3-44
DIMM Memory Drivers and Transceivers	3-45
FIFOs (First-In, First-Out Memories)	3-46
Asynchronous FIFO Memories	3-46
Synchronous FIFO Memories	3-46

SECTION 3 (continued)

IEEE Std 1284 (Parallel Port Interface)	3-48
Miscellaneous Gate and Delay Elements	3-48
Monostable Multivibrators	3-48
Phase-Locked Loops (PLLs) and Oscillators	3-49
PLLs	3-49
Oscillators	3-49
Rate Multipliers and Frequency Dividers/Timers	3-49
Universal Bus Functions	3-50
Universal Bus Drivers (UBDs)	3-50
Universal Bus Exchangers (UBEs)	3-50
Universal Bus Transceivers (UBTs)	3-51
Voltage-Level Translation	3-52
Application Specific [CompactFlash™, SD Cards, MultiMediaCards (MMCs), I ² C]	3-52
Dual-Supply Translators	3-52
ECL/TTL Translators	3-53
GTL/TTL Translators	3-53
Single-Supply Translators	3-53
Translating Bus Switches	3-54

SECTION 4 - FUNCTIONAL CROSS-REFERENCE 4-1

SECTION 5 - DEVICE SELECTION GUIDE 5-1

ABT – Advanced BiCMOS Technology Logic	5-5
ABTE/ETL – Advanced BiCMOS Technology/Enhanced Transceiver Logic	5-13
AC/ACT – Advanced CMOS Logic	5-15
AHC/AHCT – Advanced High-Speed CMOS Logic	5-23
ALB – Advanced Low-Voltage BiCMOS Logic	5-29
ALS – Advanced Low-Power Schottky Logic	5-31
ALVC – Advanced Low-Voltage CMOS Technology Logic	5-37
ALVT – Advanced Low-Voltage BiCMOS Technology Logic	5-43
AS – Advanced Schottky Logic	5-45
AUC – Advanced Ultra-Low-Voltage CMOS Logic	5-49
AUP – Advanced Ultra-Low-Power CMOS Logic	5-53
AVC – Advanced Very-Low-Voltage CMOS Logic	5-55
BCT – BiCMOS Technology Logic	5-59
64BCT – 64-Series BiCMOS Technology Logic	5-62
BTA – Bus-Termination Arrays	5-63
CB3Q – 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus-Switch Crossbar Technology Logic	5-65
CB3T – 2.5-V/3.3-V Low-Voltage Translator Bus-Switch Crossbar Technology Logic	5-69
CBT – Crossbar Technology Logic	5-71

TABLE OF CONTENTS (continued)

SECTION 5 (continued)

CBT-C – 5-V Bus-Switch Crossbar Technology Logic With –2-V Undershoot Protection	5-75
CBTLV – Low-Voltage Crossbar Technology Logic	5-79
CD4000 – CMOS B-Series Integrated Circuits	5-81
74F – Fast Logic	5-85
FB+/BTL – FutureBus+/Backplane Transceiver Logic	5-89
FCT – Fast CMOS TTL Logic	5-91
FIFO – First-In, First-Out Memories	5-99
GTL – Gunning Transceiver Logic	5-103
GTLP – Gunning Transceiver Logic Plus	5-105
HC/HCT – High-Speed CMOS Logic	5-111
IEEE Std 1149.1 (JTAG) Boundary-Scan Logic	5-123
Little Logic	5-127
LS – Low-Power Schottky Logic	5-133
LV-A – Low-Voltage CMOS Technology Logic	5-139
LV-AT – Low-Voltage CMOS Technology Logic – TTL Compatible	5-143
LVC – Low-Voltage CMOS Technology Logic	5-145
LVT – Low-Voltage BiCMOS Technology Logic	5-155
PCA/PCF – I ² C Inter-Integrated Circuit Applications	5-161
S – Schottky Logic	5-163
Signal Switch	5-167
SSTL – Stub Series-Terminated Logic	5-179
HSTL – High-Speed Transceiver Logic	5-179
SSTU – Stub Series-Terminated Ultra-Low-Voltage Logic	5-181
SSTV/SSTVF – Stub Series-Terminated Low-Voltage Logic	5-185
TTL – Transistor-Transistor Logic	5-899
TVC – Translation Voltage Clamp Logic	5-193
VME – VERSAmodule Eurocard Bus Technology	5-195

APPENDIX A - PACKAGING AND MARKING INFORMATION A-1

Everything You Want to Know About Texas Instruments	
Lead (Pb)-Free Semiconductor Products	A-5
Device Names and Package Designators for TI Logic Products	A-7
Device Names and Package Designators	
for Logic Products Formerly Offered by Cypress Semiconductor	A-8
Device Names and Package Designators	
for Logic Products Formerly Offered by Harris Semiconductor	A-9
Logic Marking Guidelines	A-11
Moisture Sensitivity by Package	A-17
Packaging Cross-Reference	A-19

APPENDIX B - LOGIC PURCHASING TOOL/ALTERNATE SOURCES B-1

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

1

LOGIC OVERVIEW

SECTION 1

LOGIC OVERVIEW


CONTENTS

Welcome to the World of TI Logic	1-5
Product Life Cycle	1-6
Family Specification Comparision	1-7
Family Performance Positioning	1-10
CMOS Voltage Roadmap	1-11
CMOS Voltage vs. Speed	1-12
Selection of a Logic Family for a Particular Load	1-13
Device Names and Package Designators	1-14
Logic Vendor Partnerships	1-15
IC Basics	1-16
Logic Feature List	1-17
Bus-Hold Input	1-18
Series Damping Resistors	1-19
Partial Power Down	1-20
Hot Insertion	1-21
Live Insertion	1-22
Mixed-Voltage Interfacing	1-23
Dual-Supply Level Translators	1-24
What Is Little Logic?	1-25
TI Little Logic Portfolio	1-26
NanoStar™/NanoFree™ Package	1-27
AUC	1-28
AUP	1-29
ALVC Family	1-30
AVC Family	1-31
LVC Family	1-32
LV-A Family	1-33
LVT Family	1-34
ALVT Family	1-35
TI Signal Switch Product Overview	1-36
Digital Bus Switch: Description	1-37
Digital Bus Switch: Key Characteristics	1-38
Digital Bus Switch: Configurations	1-39
Digital Bus Switch: CBT	1-40
Digital Bus Switch: CBT-C	1-41
Digital Bus Switch: CBTLV	1-42
Digital Bus Switch: CB3Q	1-43
Digital Bus Switch: CB3T	1-44
Digital Bus Switch: r_{on} Characteristics	1-45
Digital Bus Switch Naming	1-46
Analog Switch: Families and Configurations	1-47
Specialty Switch: TL52055 Wide-Bandwidth, 2-Input, 1-Output, 3-Circuit Video Switch	1-48


CONTENTS (continued)

TVC Translation Voltage Clamp	1-49
What is GTL/GTLP?	1-50
GTLP Is a Bidirectional Translator	1-51
GTLP and VME Are Specifically Designed for High-Performance Multi-Slot Parallel Backplanes	1-52
GTLP Distributed-Load Devices	1-53
SN74VMEH22501/A UBT	1-54
Packaging Options	1-55
TI FIFO Products	1-57
TI FIFO Product and Technology Roadmap	1-58
TI FIFOs Optimize System Performance	1-59
IEEE Std 1149.1 (JTAG) Boundary-Scan Logic	1-60
Current TI JTAG Product Offering	1-61
Typical System-Level Application	1-62
Typical JTAG Applications	1-64

Welcome to the World of TI Logic

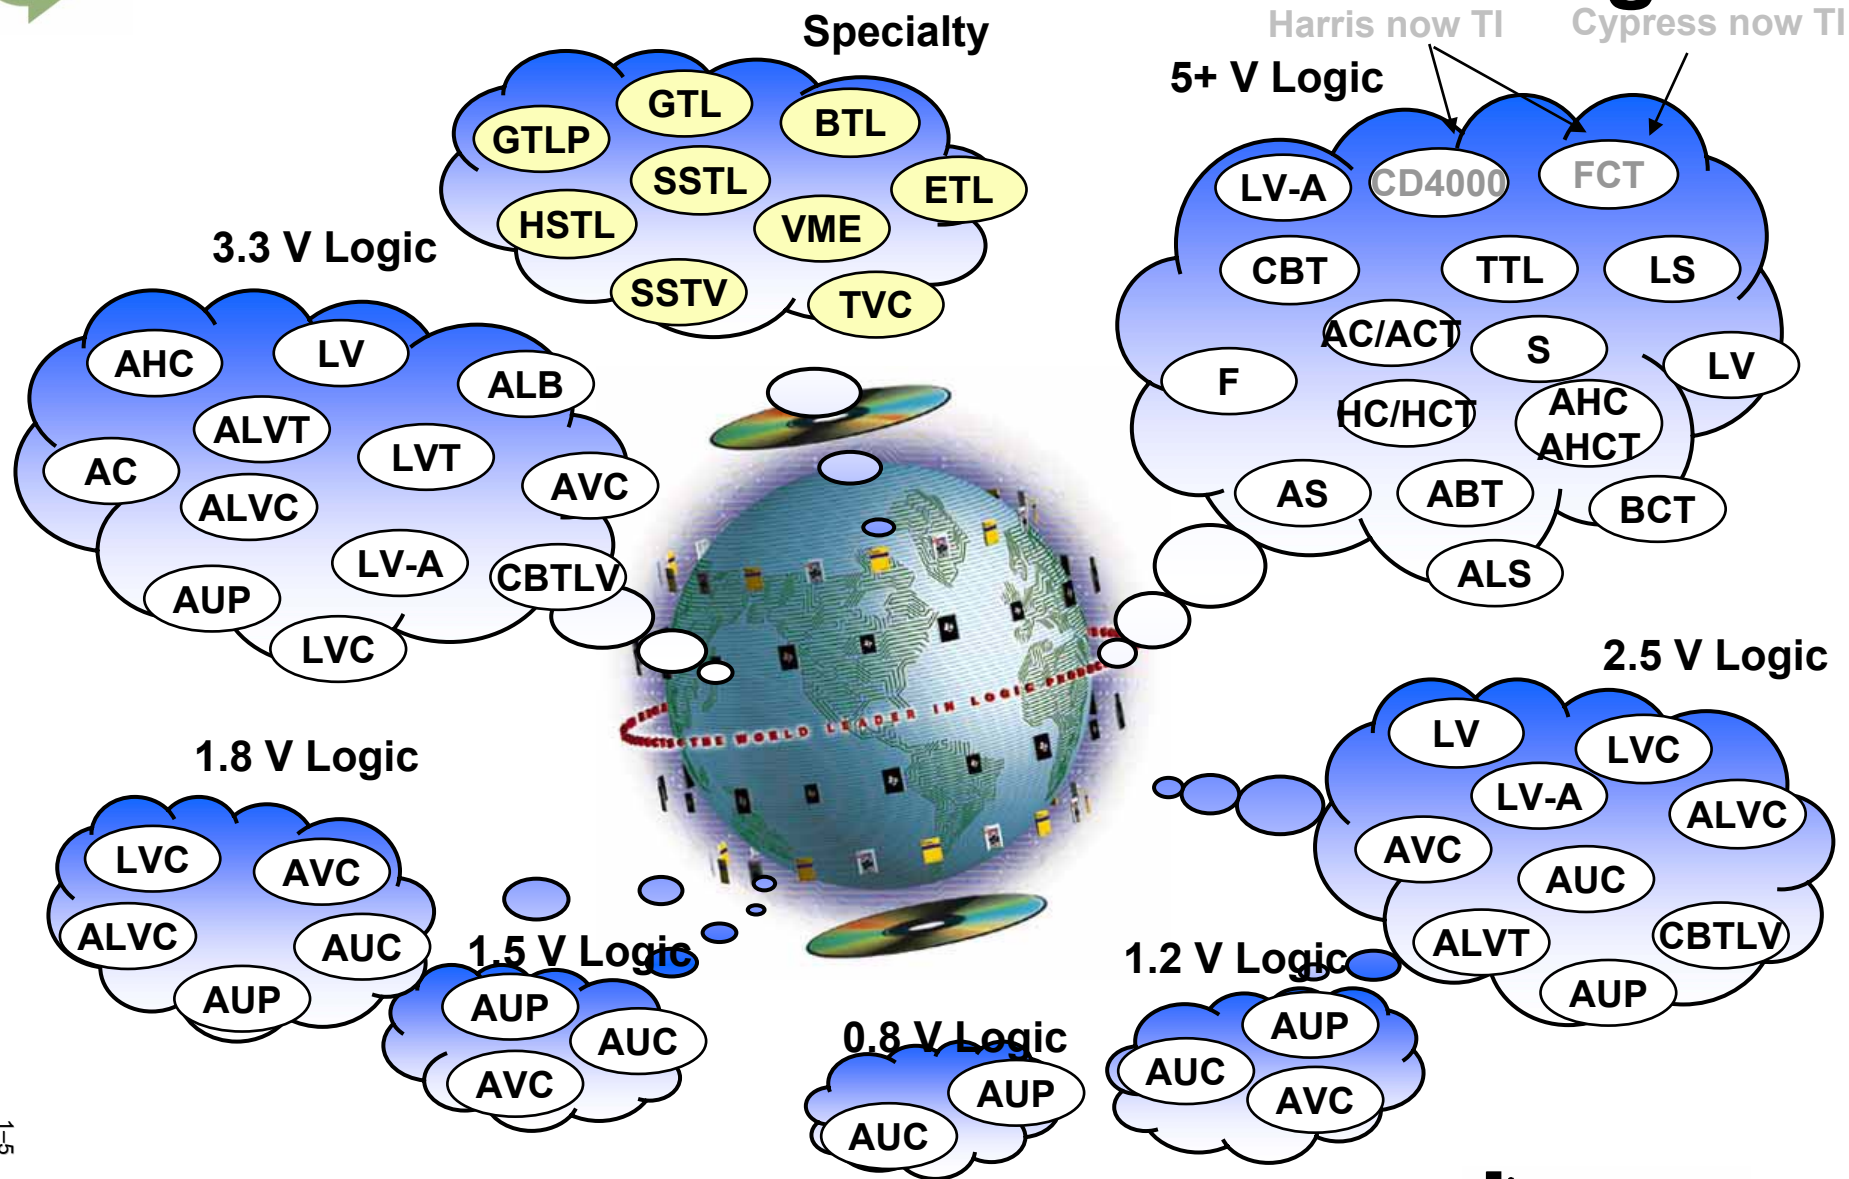

Product Life Cycle

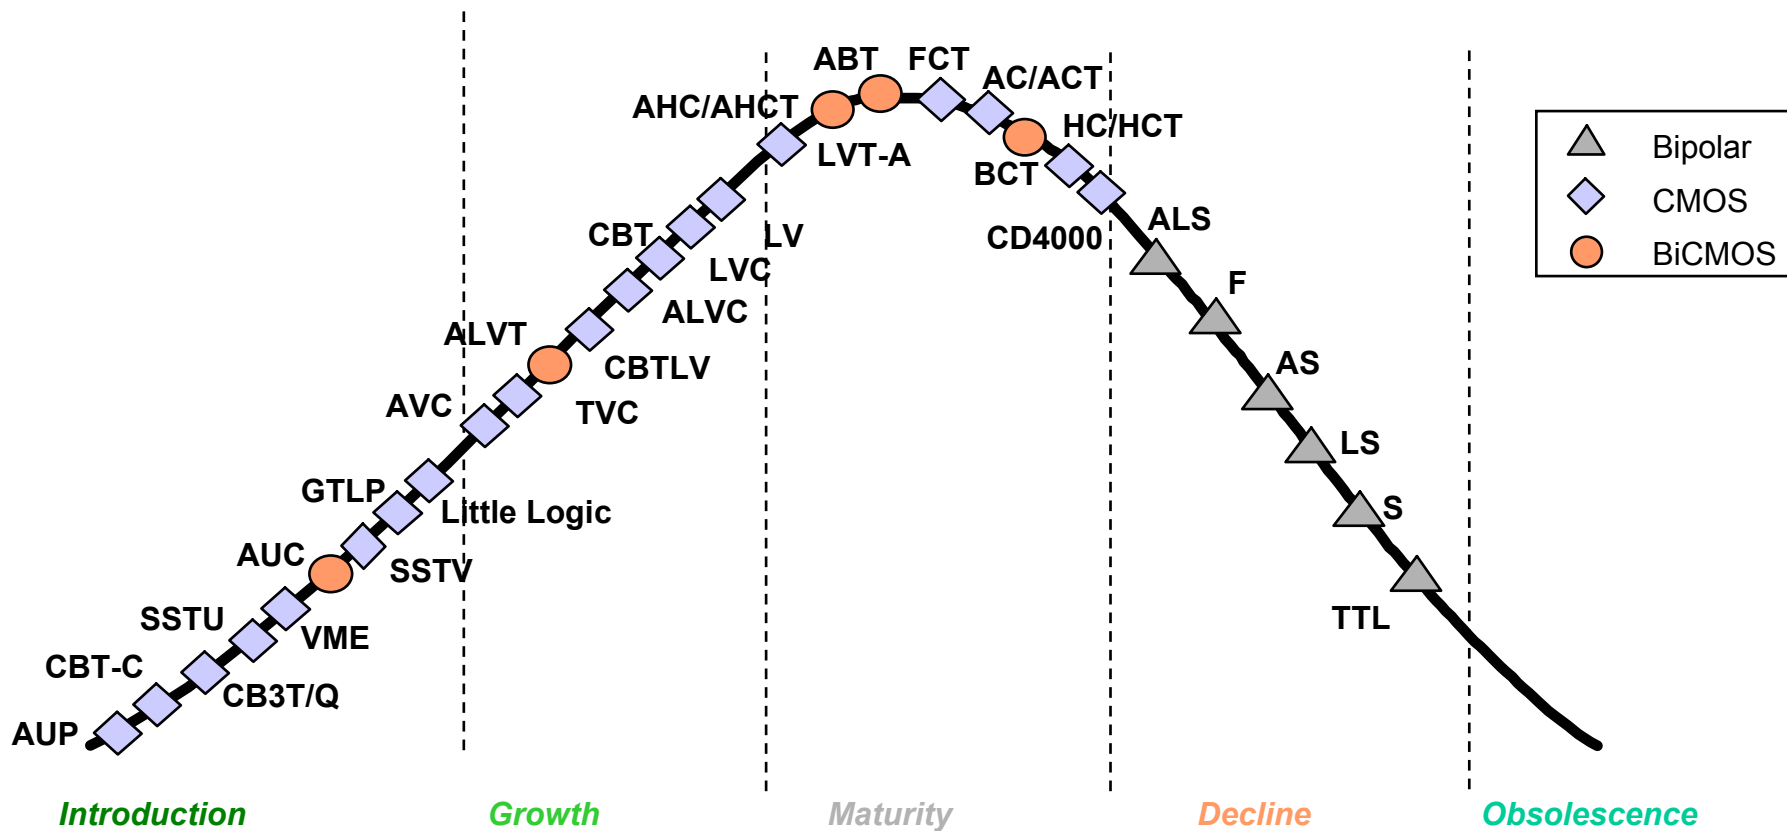

TI remains committed to be the last supplier in the older families.

Family Specification Comparison

		V _{CC}	V _{CC}	t _{pd}	I/O				I _{OH}	I _{OL}	Static	
	Technology	(V)	Range	max (ns)	Tolerance (V)	Input Compatibility	Output Compatibility	Port	(max) (mA)	(max) (mA)	Current I _{CC} (μA)	Isolation Level*
5-V Logic	Bipolar											
	ALS	5	4.5 to 5.5	10.0	5	TTL	TTL	Both	Ⓔ15	24	58 mA	0
	AS	5	4.5 to 5.5	7.5	5	TTL	TTL	Both	Ⓔ15	64	143 mA	0
	74F	5	4.5 to 5.5	6.0	5	TTL	TTL	A B	Ⓔ3 Ⓔ15	24 64	120 mA	0
	LS	5	4.75 to 5.25	12.0	5	TTL	TTL	Both	Ⓔ15	24	95 mA	0
	S	5	4.75 to 5.25	9.0	5	TTL	TTL	Both	Ⓔ15	64	180 mA	0
	TTL	5	4.75 to 5.25	22.0	5	TTL	TTL	Both	Ⓔ0.4	16	22 mA	0
	BiCMOS											
	ABT	5	4.5 to 5	3.5	5	LVTTL/TTL	TTL	Both	Ⓔ32	64	250	1
	ABTE	5	4.5 to 5.5	5.2	5	ETL	TTL	A B	Ⓔ60 Ⓔ12	90 12	48	1
	BCT	5	4.5 to 5.5	6.6	5	LVTTL/TTL	TTL	A B	Ⓔ3 Ⓔ15	24 64	90 mA	2
	CMOS											
	AC	5	3.0 to 5.5	6.5	V _{CC} + 0.5	CMOS	CMOS	Both	Ⓔ24	24	40	0
	ACT	5	4.5 to 5.5	8.0	V _{CC}	TTL	CMOS	Both	Ⓔ24	24	40	0
	AHC	5	2.0 to 5.5	7.5	5.5**	CMOS	CMOS	Both	Ⓔ8	8	40	0
	AHC1G	5	2.0 to 5.5	5.0	5.5**	CMOS	CMOS	Both	Ⓔ8	8	10	0
	AHCT	5	4.5 to 5.5	7.7	5.5**	TTL	CMOS	Both	Ⓔ8	8	40	0
	AHCT1G	5	4.5 to 5.5	5.0	5.5**	TTL	CMOS	Both	Ⓔ8	8	40	0
	CBT	5	4.0 to 5.5	0.25	5.5	TTL	TTL	Both	N/A	N/A	3	0
	CBT-C	5	4.0 to 5.5	0.25	5.5	TTL	TTL	Both	N/A	N/A	3	1
	CBT1G	5	4.0 to 5.5	0.25	5.5	TTL	TTL	Both	N/A	N/A	1	0
	CD4K	5,10,15	3.0 to 18.0	Ⓔ	V _{CC}	CMOS	CMOS	Both	Ⓔ0.2, Ⓔ0.5, Ⓔ1.4	0.52, 1.3, 3.6	5, 10, 20	0
	FB (Ⓔ040)	5	Ⓔ Ⓔ	8.2	5	LVTTL/TTL BTL	BTL LVTTL/TTL	A B	Ⓔ3 N/A	24 100	70 mA	3
	FCT	5	4.75 to 5.25	5.3	5	TTL	TTL	Both	Ⓔ15	64	80	0
	HC	5	2.0 to 6.0	21.0	V _{CC}	CMOS	CMOS	Both	Ⓔ7.8	7.8	80	0
	HCT	5	4.5 to 5.5	30.0	V _{CC}	TTL	CMOS	Both	Ⓔ6	6	80	0

Family Specification Comparison

		V _{CC}	V _{CC}	t _{pd}	I/O				I _{OH}	I _{OL}	Static	
		(V)	Range	max	Tolerance	Input	Output		(max)	(max)	Current I _{CC}	Isolation
	Technology	(V)	Range	(ns)	(V)	Compatibility	Compatibility	Port	(mA)	(mA)	(μA)	Level*
3.3-V Logic	Bipolar											
	ALB	3.3	3.0 to 3.6	2.0	V _{CC} + 0.5	Custom	Custom	Both	±25	25	800	0
	BiCMOS											
	ALVT	3.3	2.3 to 3.6	3.5	5	LVTTTL/TTL	LVTTTL	Both	±8	24	4.5 mA	2
	LVT	3.3	2.7 to 3.6	3.5	5	LVTTTL/TTL	LVTTTL	Both	±32	64	190	2
	VME	3.3	3.15 to 3.45	14.5	5	LVTTTL/TTL	LVTTTL/TTL	A B	±24 ±48	24 64	30 mA	3
	CMOS											
	ALVC	3.3	1.65 to 3.6	3.0	V _{CC}	LVTTTL/TTL	LVC MOS	Both	±24	24	20	0
	ALVCF	3.3	2.3 to 3.6	3.5	V _{CC}	LVTTTL/TTL	LVC MOS	Both	±12	12	40	0
	AUP1G/2G/3G	3.3	0.8 to 3.6	4.0	3.6	LVC MOS	LVC MOS	Both	±4	4	0.9	1
	CBTLV	3.3	2.3 to 3.6	0.25	3.6	LVC MOS	LVC MOS	Both	N/A	N/A	10	1
	CBTLV1G	3.3	2.3 to 3.6	0.25	3.6	LVC MOS	LVC MOS	Both	N/A	N/A	10	1
	CB3Q	3.3	2.3 to 3.6	0.2	5	LVTTTL/TTL	LVTTTL/TTL	Both	N/A	N/A	0.7 mA	1
	CB3T	3.3	2.3 to 3.6	0.2	5	TTL	TTL	Both	N/A	N/A	40	1
	GTL	3.3	3.15 to 3.45	6.5	5	LVTTTL/TTL	GTL	A	±24	24	80 mA	1
						GTL	LVTTTL/TTL	B	N/A	50		
	GTLP	3.3	3.15 to 3.45	7.7	5 4.6	LVTTTL/TTL GTLP	GTLP LVTTTL/TTL	A B	±24 N/A	24 100	40 mA	3
	HSTL	3.3	3.15 to 3.45	5.0	3.3 N/A	HSTL N/A	LVTTTL	D Q	N/A ±24	N/A 24	50 mA	0
	LV-A	3.3	2.0 to 5.5	14.0	5	LVC MOS	LVTTTL	Both	±8	8	20	1
	LVC	3.3	1.65 to 3.6	4.0	5.5	LVTTTL/TTL	LVC MOS	Both	±24	24	10	1
	LVC1G/2G/3G	3.3	1.65 to 5.5	3.5	5.5	LVTTTL	LVTTTL	Both	±24	24	10	1
	LVCZ	3.3	2.7 to 3.6	4.0	5.5	LVTTTL/TTL	LVC MOS	Both	±24	24	60	2
	SSTL	3.3	2.3 to 3.6	3.7	3.3 N/A	SSTL_3 N/A	SSTL_3	D/A Q/Y	N/A ±20	N/A 20	90 mA	0

Family Specification Comparison

		V _{CC}	V _{CC}	t _{pd}	I/O	Input	Output		I _{OH}	I _{OL}	Static	Isolation
	Technology	(V)	Range	max (ns)	Tolerance (V)	Compatibility	Compatibility	Port	(mA)	(mA)	Current I _{CC} (μA)	Level*
2.5-V Logic	CMOS											
	AVC	2.5	1.4 to 3.6	2.0	3.6	LVC MOS	LVC MOS	Both	⌀8	8	20	1
	SSTV	2.5	2.3 to 2.7	2.8	3.3	SSTL_2	SSTL_2	D	N/A	N/A	56 mA	0
					N/A	N/A	Class 2	Q	⌀16	16		
1.8-V Logic	SSTVF	2.5	2.3 to 2.7	2.6	3.3	SSTL_2	SSTL_2	D	N/A	N/A	56 mA	0
					N/A	N/A	Class 1	Q	⌀16	16		
	CMOS											
	AUC	1.8	0.8 to 2.7	2.0	3.6	LVC MOS	LVC MOS	Both	⌀8	8	10	1
	AUC1G/2G/3G	1.8	0.8 to 2.7	2.0	3.6	LVC MOS	LVC MOS	Both	⌀8	8	10	1
	SSTU	1.8	1.7 to 1.9	2.5	2.3	SSTL_18	SSTL_18	D	N/A	N/A	50 mA	0
					N/A	N/A		Q	⌀8	8		

*V_{CC} listed is optimized node. For more specification information visit logic.ti.com

The information provided is general product specifications. For specific device information, please consult the respective data sheet.


Level 1 = Partial power-down

Level 2 = Hot insertion

Level 3 = Live insertion


**5.5-V tolerance at input only

Family Performance Positioning

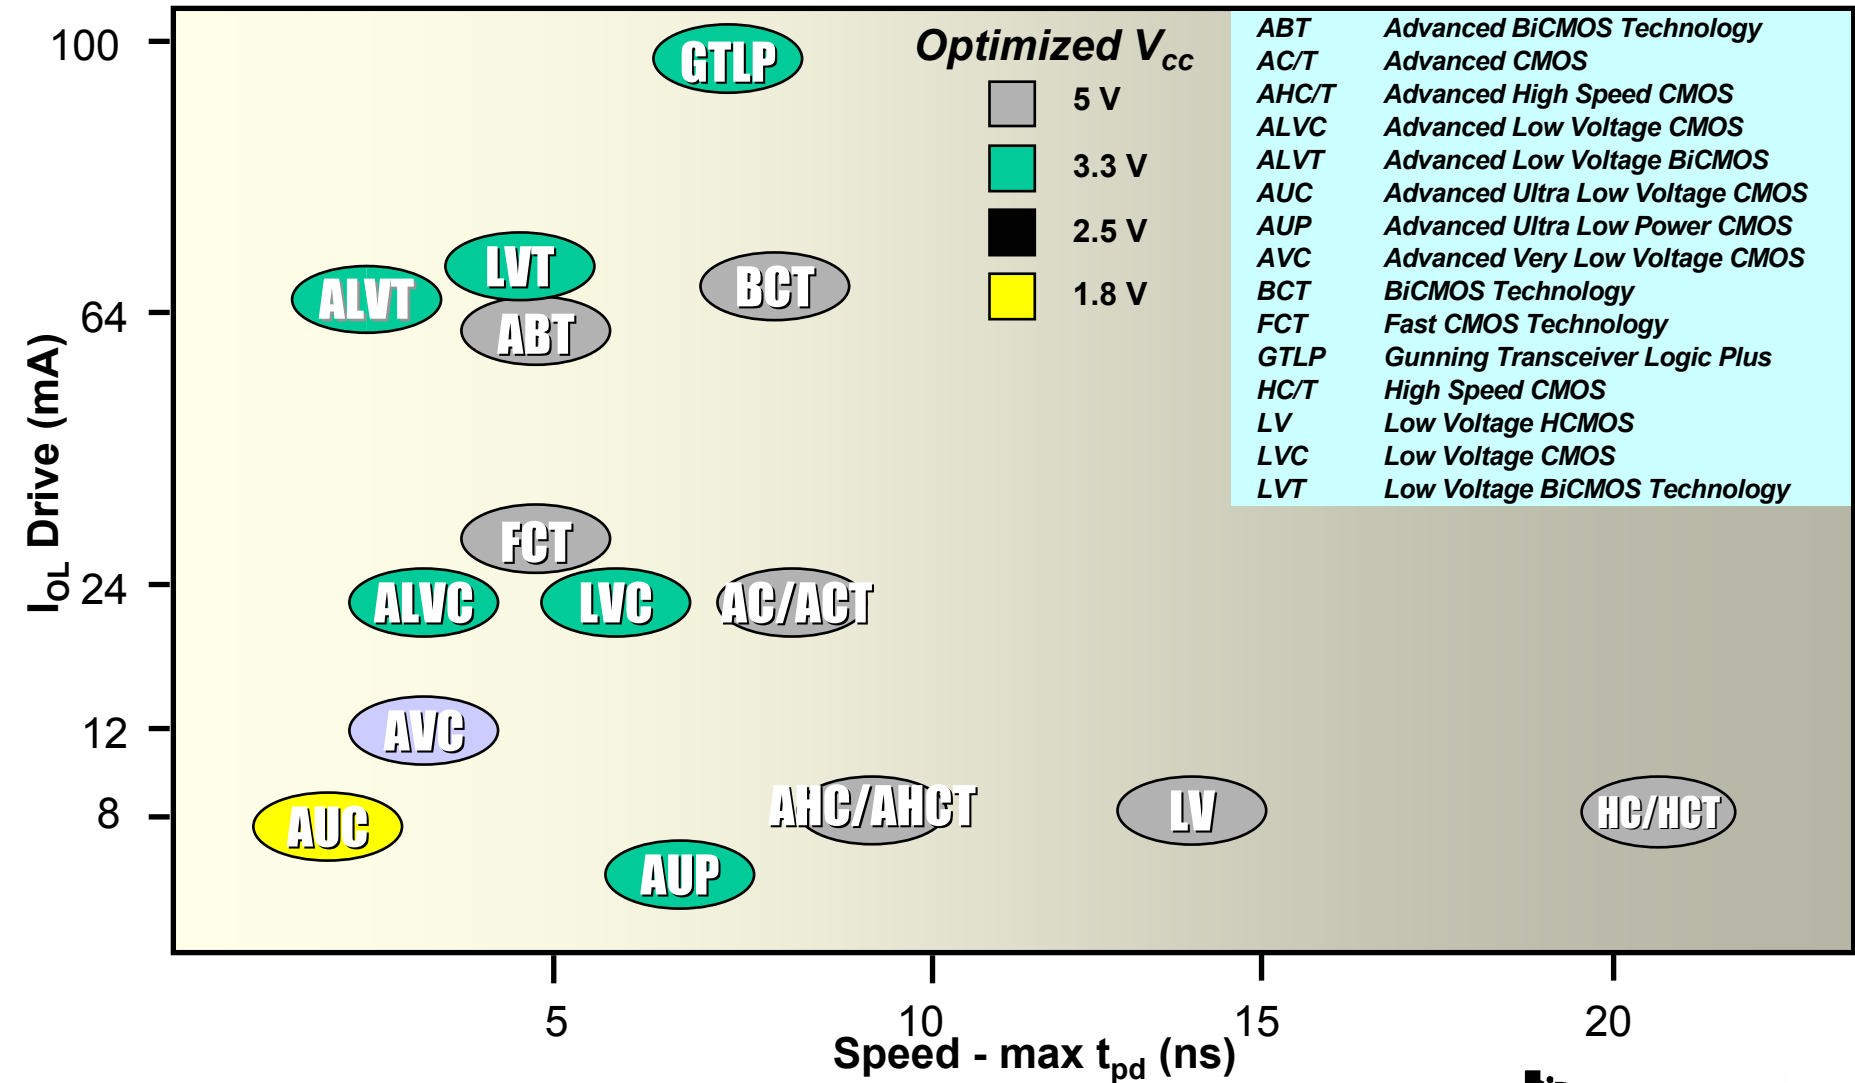




CMOS Voltage Roadmap

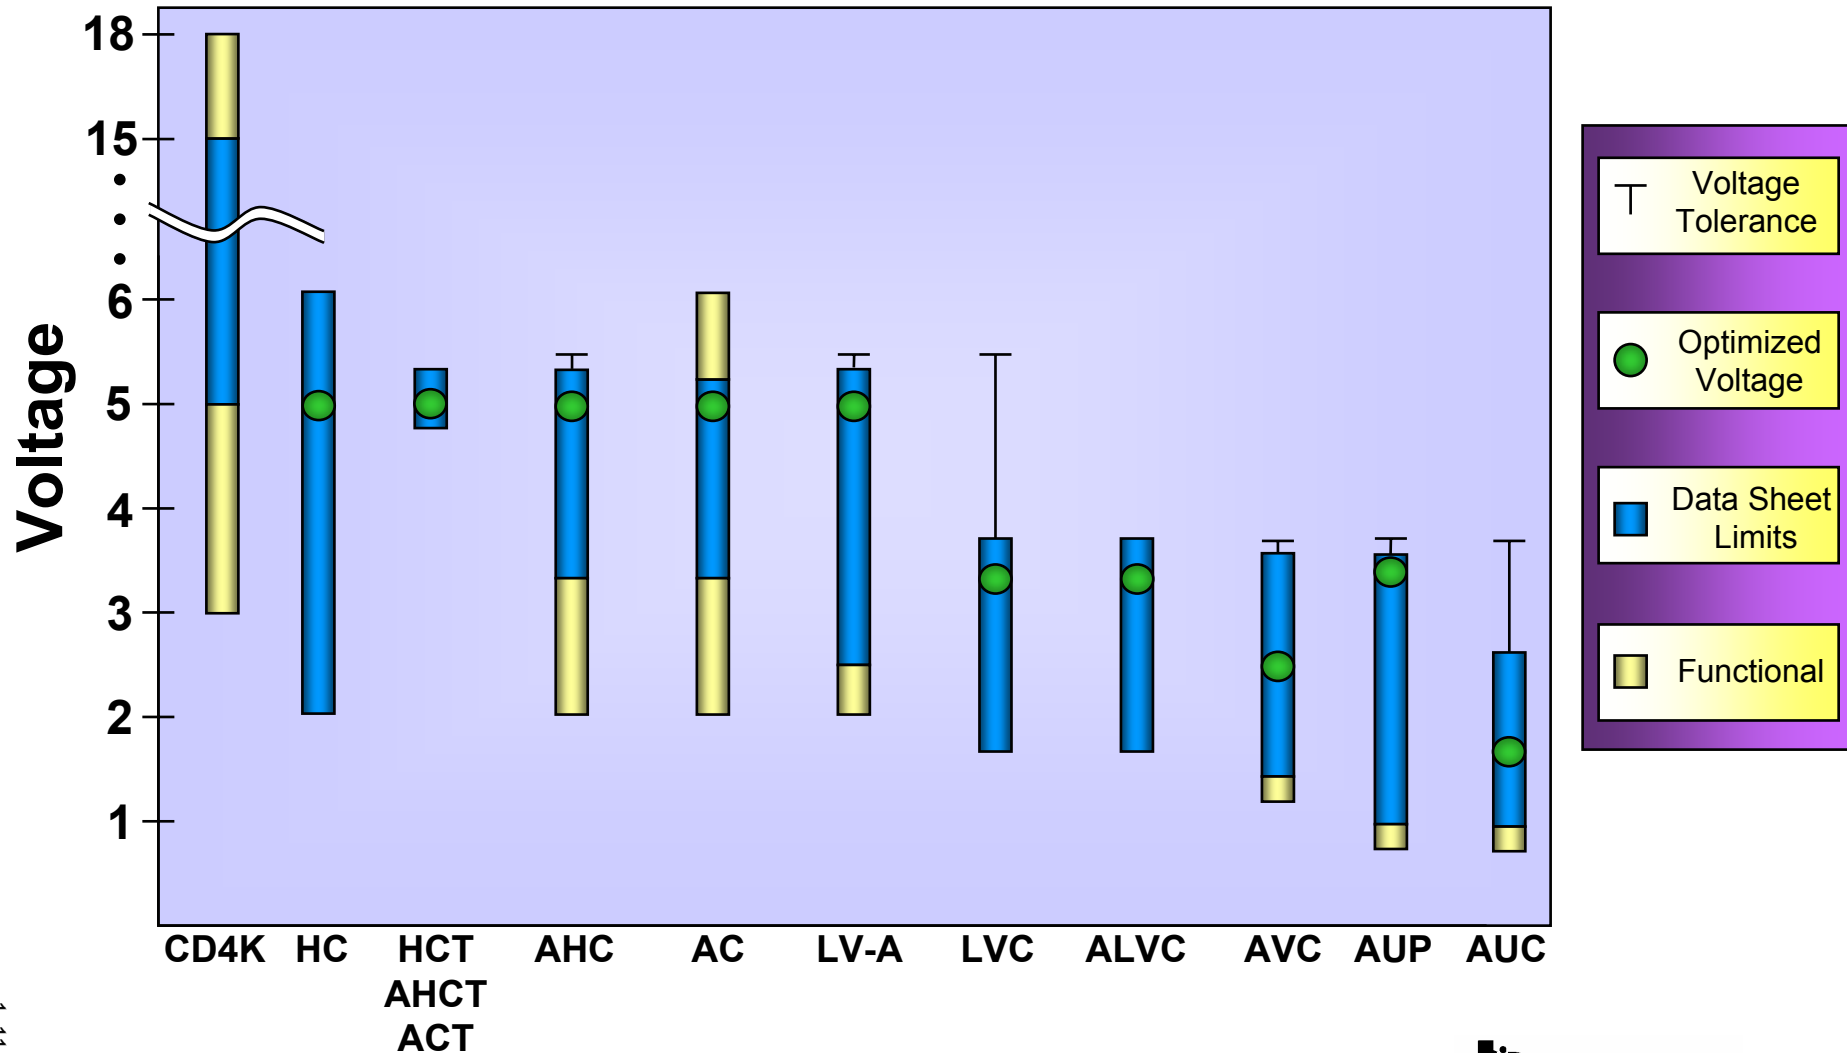

CMOS Voltage vs. Speed

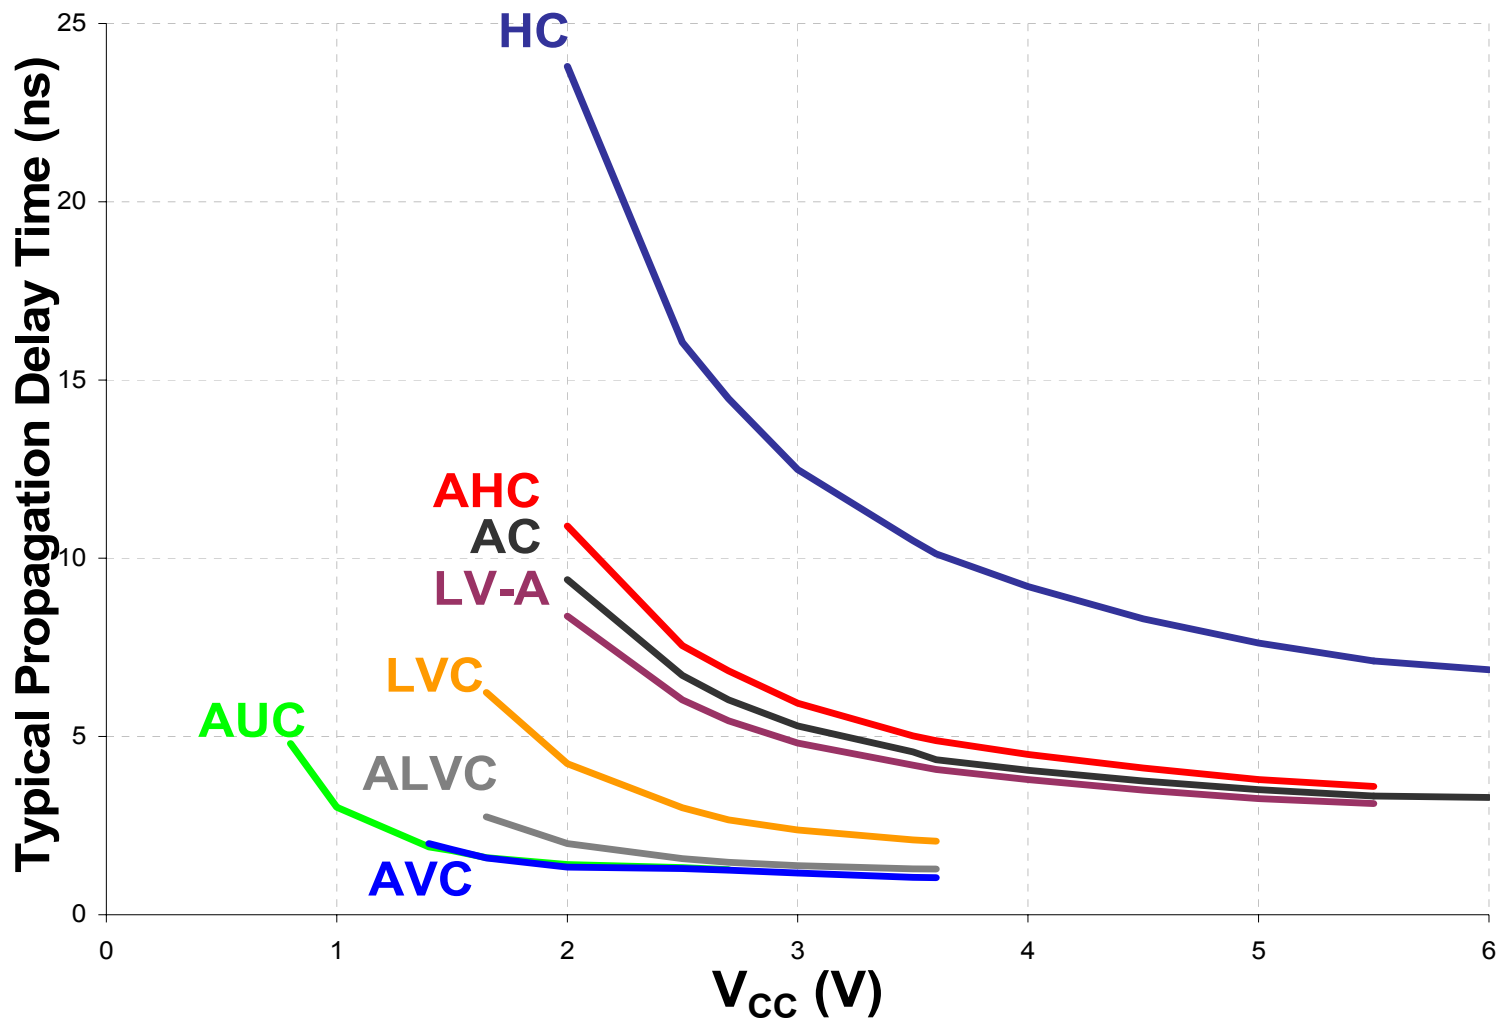

Comparison of 16245 functions with 500 ohm/30pF load. (AUC not yet tested)



Selection of a Logic Family for a Particular Load

Point-to-point, Light Load (0pF to 30pF)	LVC-R	AVC	AUC	LVC	LV-A
Point-to-point, Medium Load (30pF to 50pF)	AVC	LVC		ALVC	
Point-to-point, Heavy Load (50pF to 100pF)	LVT	ALVT		LVC	
Simultaneous Switching	AVC	AUC		LVC-R	LV-A
Portable Application, Slow Speed (<50MHz)	AUP	LV-A		AVC	LVC
Portable Application, Fast Speed (50MHz to 150MHz)	AVC	AUC		LVC	
Multi-point Load (Unbalanced stub or daisy-chain)	VME, GTLP Backplane			LVT	

Best Solution: Good Solution:

Note: Multi-point load, with equal stubs, can be treated as point-to-point load

Device Names and Package Designators

Family
 ABT/E
 AC/ACT
 AHC/AHCT
 ALB
 ALS
 ALVC
 ALVT
 AS
 AUC
 AUP
 AVC
 BCT
 CBT/LV/CB3x
 CD4000
 F
 FB
 FCT
 GTL
 GTLP
 HC/HCT
 HSTL
 LS
 LV-A
 LVC
 LVT
 S
 SSTL
 SSTU
 SSTV/SSTVF
 TTL
 TVC
 VME

Standard Prefix
 Military (54)
 Commercial (74)

Special Feature
 Blank = no special features
 A, B, C = Configurable V_{CC}
 D = Level Shifting Diode
 H = Bus Hold
 K = Undershoot Clamp
 R = Damping Resistor on
 Inputs/Outputs
 S = Schottky Clamping Diodes
 Z = Power Up 3 State

Bit Width
 Blank = Gates, MSI, and Octals
 1G = Single Gate
 2G = Dual Gate
 3G = Triple Gate
 8 = Octal IEEE 1149 (JTAG)
 16 = Widebus™ (16, 18, and 20)
 18 = Widebus IEEE 1149.1 (JTAG)
 32 = Widebus+™ (32 and 36 bit)

Options
 Blank = No Options
 2 = Series Damping
 Resistor on Outputs
 3 = Level Shifter
 4 = Level Shifter
 25 = 25Ω Line Driver

Function
 00
 174
 244

Package Type
 D, DW = SOIC
 DB, DL = SSOP
 DBB, DGV = TVSOP
 DCT, DCU = TSSOP
 DBV, DCK = SOT
 DGG, PW = TSSOP
 FK = LCCC
 FN = PLCC
 GB = CPGA
 GKE, GKF = LFBGA
 GQL = VFBGA
 HFP, HS, HT, HV = CQFP
 J, JT = CDIP
 N, NP, NT = PDIP
 PAG, PAH, PCA, PCB, PM,
 PN, PZ = TQFP
 PH, PQ, RC = QFP
 RGY, RGQ = QFN
 W, WA, WD = CFP
 YEP, YZP = DSBGA†

Tape & Reel
 R = 3000
 T = 250

Device Revision
 Blank = No Revision
 Letter Designator A-Z

† DSBGA is the JEDEC reference for wafer chip scale package (WCSP).




Logic Vendor Partnerships

Performance Range	TI	Philips	(Renesas) Hitachi	IDT	Toshiba	FSC	On
5 V	high	ABT	ABT	ABT	ABT	ABT-C	
	low	AHC	AHC		VHC	VHC	VHC
3 V	high	CBT-LV		CBT-LV			
		ALVT	ALVT				
		ALVC	ALVC	ALVC	ALVC	VCX	VCX
	medium	LVT	LVT	LVT		LVT	
		LVC	LVC	LVC	LVC	LCX	LCX
	low	LV-A	LV	LV-A	LVQ	LVQ	LVQ
						LVX	LVX
2.5 V	high	AVC	AVC				
1.8 V	high	AUC	AUC	AUC			


IC Basics

Comparison of Switching Standards

1-16

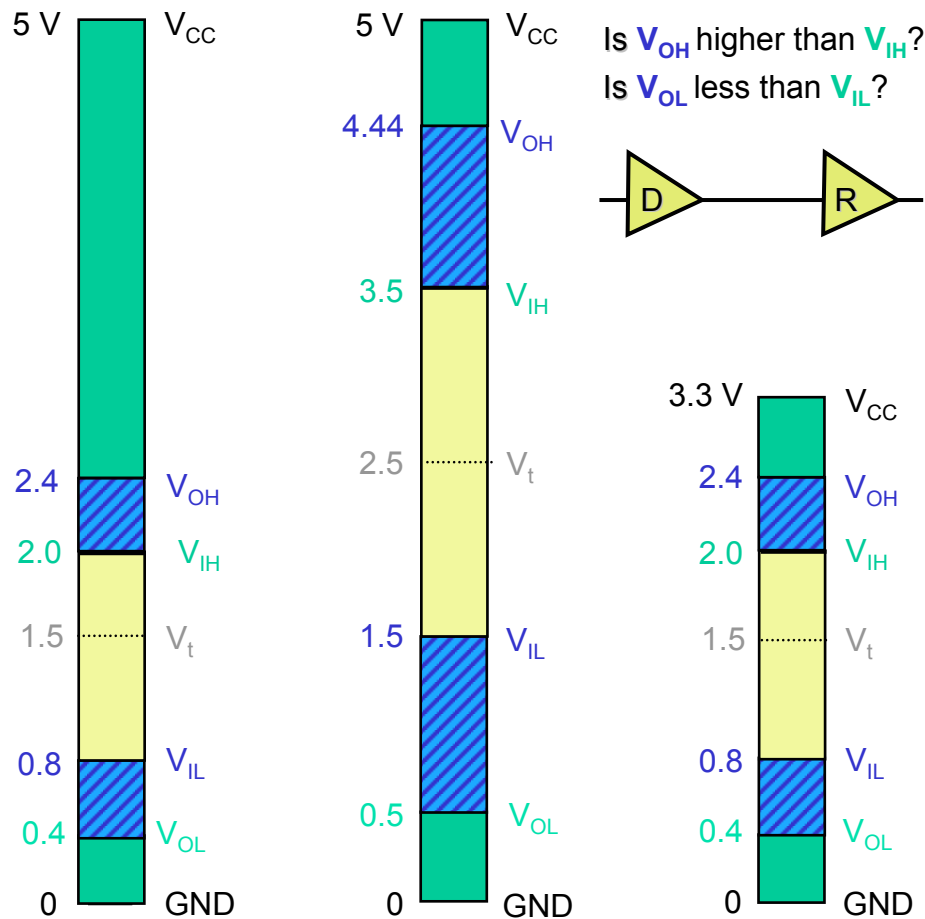

D \ R	5TTL	5CMOS	3LVTTTL	2.5CMOS	1.8CMOS
5TTL	Yes	No	Yes *	Yes*	Yes*
5 CMOS	Yes	Yes	Yes*	Yes*	Yes*
3 LVTTTL	Yes	No	Yes	Yes*	Yes*
2.5 CMOS	Yes	No	Yes	Yes	Yes*
1.8 CMOS	No	No	No	No	Yes

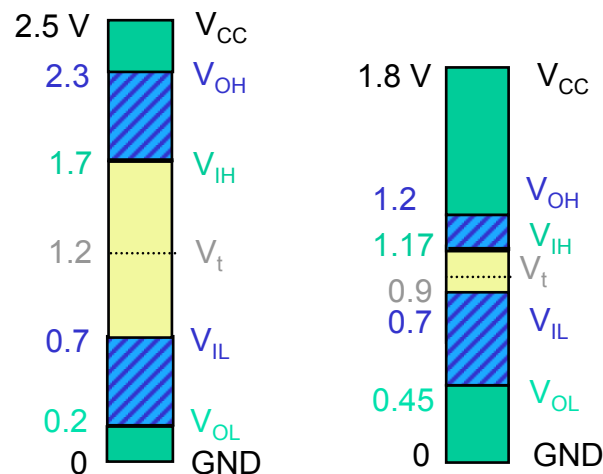* Requires V_{IH} Tolerance

5-V TTL
Standard TTL: ABT, AHCT, HCT, ACT, Bipolar

5-V CMOS
Rail-to-Rail 5 V HC, AHC, AC, LV-A

3.3-V LVTTTL
LVT, LVC, ALVC AUP, LV-A, ALVT


2.5-V CMOS
AUC, AUP, AVC, ALVC, LVC, ALVT

1.8-V CMOS
AUC, AUP, AVC, ALVC, LVC

Logic Feature List †

- **Bus Hold – ABT, ALVC, ALVT, AVC, AUC, FCT, GTL, GTLP, LVC, LVT, VME**
 - Bus-hold circuitry in selected logic families helps solve the problem of floating inputs and eliminates the need for pull-up or pull-down resistors by holding the last known state of the input. See $I_{I(HOLD)}$ or I_{BHL} , I_{BHH} , I_{BHLO} , and I_{BHLO} on data sheet.
 - **Series Damping Resistors – ABT, ALVC, ALVT, F, GTLP, LVC, LVT, VME**
 - Series damping resistors limit signal overshoot and undershoot by providing better impedance matching and line termination without the need for external resistors.
 - **Partial Power Down (Level 1 Isolation - I_{off}) – ABT, ALVT, AVC, AUC, AUP, CBTLV, CBT-C, GTL, GTLP LV-A, LVC, LVT, VME**
 - IOFF circuitry prevents the device from being damaged during hot insertion. See IOFF specifications on data sheet.
 - **Hot Insertion (Level 2 Isolation – I_{off} and Power-up 3-state) – ABT, ALVT, GTLP, LVCZ, LVT, VME**
 - Power-up 3-state ensures valid output levels during power up and valid Z on the outputs during power down. See IOZPU, IOZPD.
 - **Live Insertion (Level 3 Isolation – I_{off} , Power-up 3-state, and BIAS VCC) – GTLP, FB, CBT, CBTLV, VME**
 - Precharges I/O capacitance, preventing glitching of active data.
 - **Mixed-Voltage-Tolerant I/Os and Level Shifting – AVC, ALVC, ALVT, AUC, AUP, GTL, GTLP, LV-A, LVC, LVT**
 - Systems use mixed supply voltages and TTL or CMOS levels in many designs. Most advanced-logic families allow mixed-signal interfacing and provide level-shifting functions for certain mixed-voltage applications.
 - **JTAG – ABT, ACT, BCT, LVT**
- (†selected functions)

Bus-Hold Input

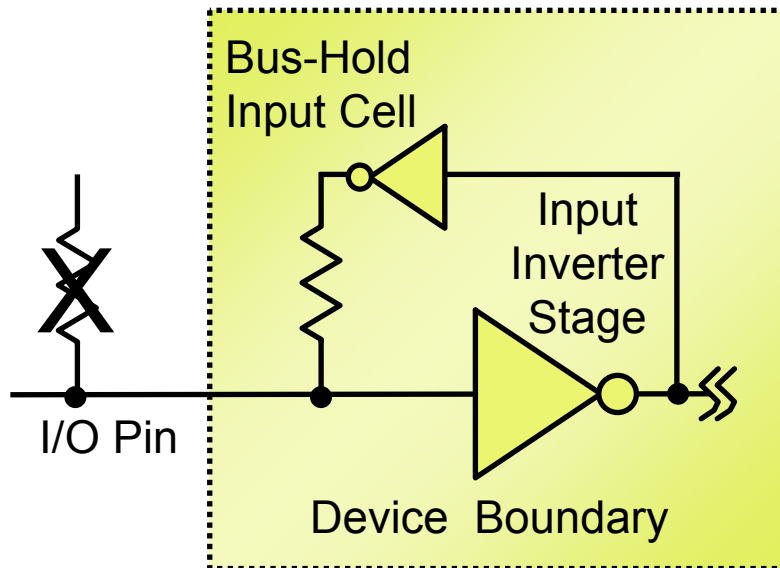


***Bus-hold input cell
replaces pullup resistor***

- Holds the last known state of the input – avoids floating inputs
- $I_{i(\text{HOLD})}$ or I_{BHL} , and I_{BHH} specifies min holding current
- Bus-hold current does NOT load down the driving output significantly at valid logic levels.
- Eliminates the need for external resistors on unused or floating input/output pins
- The “H” in the device name indicates bus hold.
- Negligible increase in systems power consumption.

Families with Bus-Hold Options

ABT, ALVC, ALVT, AVC, AUC, FCT, GTL, GTLP, LVC, LVT, VME

Series Damping Resistors

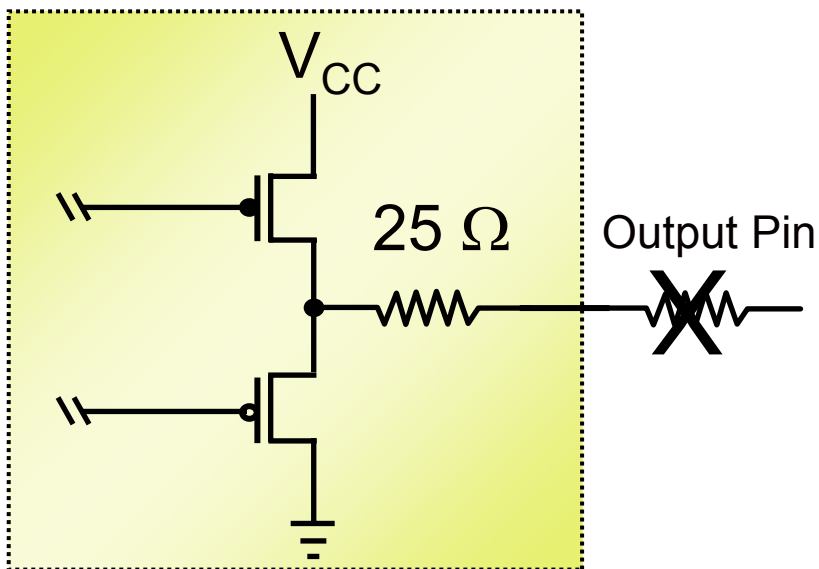

***Damping resistors
replace external series resistors***

- Improves signal integrity
- Provides better impedance matching and line termination
- Eliminates the need for external series resistors
- Extra “2” or “R” in device name indicates damping resistor option
 - R: I/O pins (LVCHR16245)
 - 2: Output pins (LVC162244)


Families with Damping Resistor Options

ABT, ALVC, ALVT, F, GTLP, LVC, LVT, VME


Partial Power Down Live Insertion, Level 1

1-20

System Function Capability

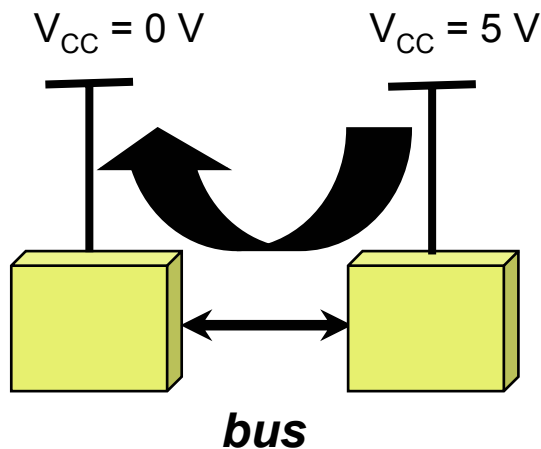

- Prevents unexpected device behavior during power up or power down
- Prevents signals from sourcing current through parasitic diodes
- Allows for power down of partial circuits within a system
- I_{off} spec is required for partial power down operations

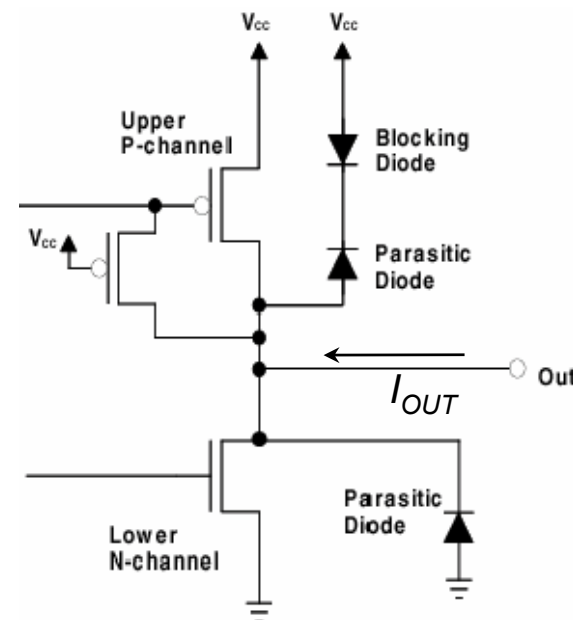

When $V_{CC} = 0$, $I_{OUT} = 0$ for $V_{OUT} > V_{CC}$.


Families Supporting Partial Power Down (I_{off})

ABT, ALVT, AVC, AUC, AUP, CBTLV, CBT-C, GTL, GTLP LV-A, LVC, LVT, VME

Hot Insertion


Live Insertion, Level 2

System Function/Capability

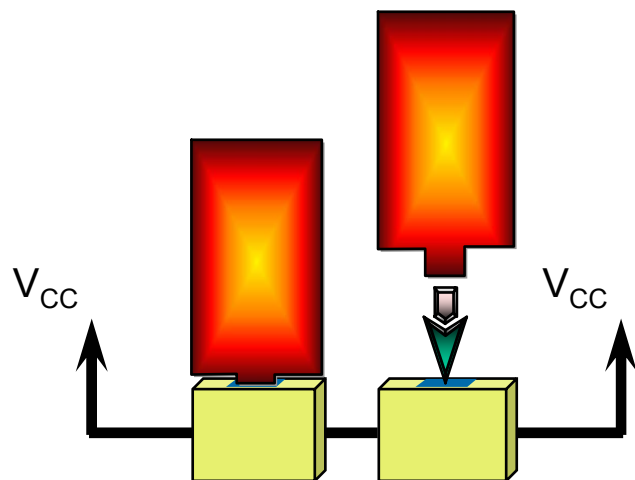

- Prevents unwanted turn-on of output before V_{CC} trip point
- Prevents bus to be loaded down upon power up of device
- Allows for hot insertion
- I_{off} and PU3S specs are required for Hot Insertion

Example Circuit Implementation PU3S Circuit

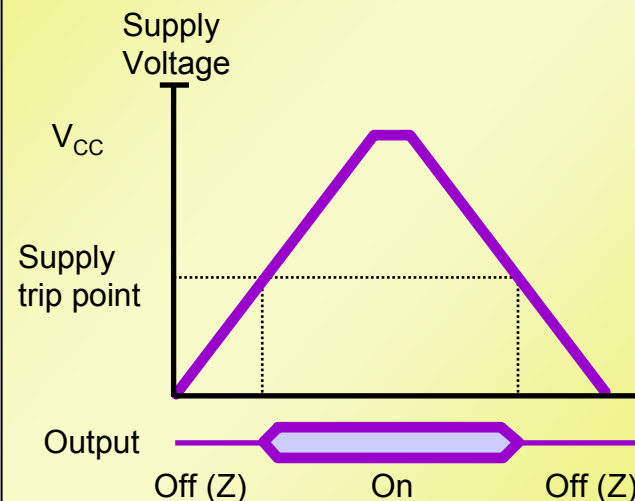

Families Supporting Hot Insertion (I_{off} and Power-up 3-state)


ABT, ALVT, GTLP, LVCZ, LVT, VME

Live Insertion

Live Insertion, Level 3

1-22

System Function/Capability


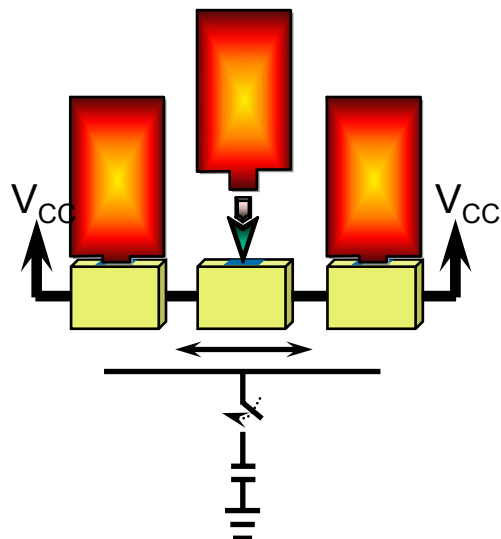


- Prevents unwanted glitches at the I/O
- Allows for live insertion
- I_{off} , PU3S, and BIAS V_{CC} required for Live Insertion
- Staggered pins required pre-charge functionality

*Families Supporting Live Insertion
(I_{off} , Power-up 3-state, and BIAS V_{CC})*

GTLP, FB, CBT, CBTLV, VME

Circuit Implementation Pre-Charge Circuit

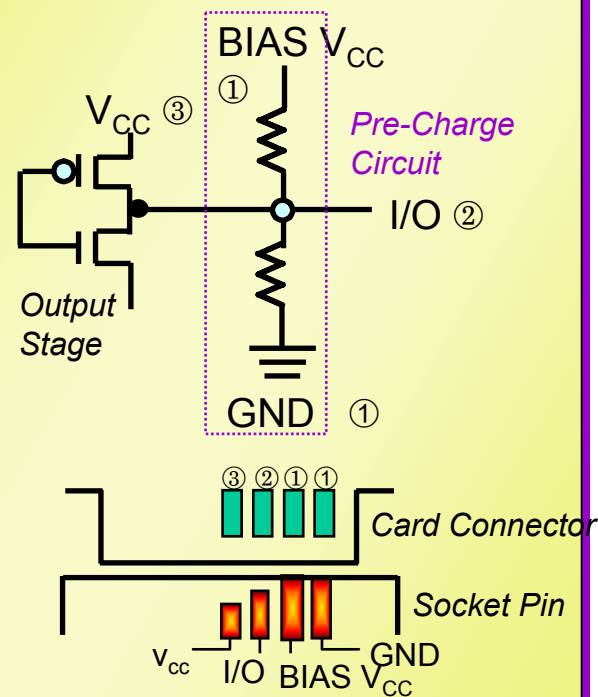

Mixed-Voltage Interfacing

Open-Drain Outputs 05/06/07 Functions

Functions Available


05 -S, LS, ALS, AC, HC,
AHC, LV, LVC

06 -TTL, LS, LV, LVC,
LVC1G/3G, AUC1G

07 -TTL, LS, LV, LVC,
LVC1G/3G, AUC1G


NOTE: Over voltage tolerance is
required to support UP translation.

Required **Input** level
depends on V_{CC1}

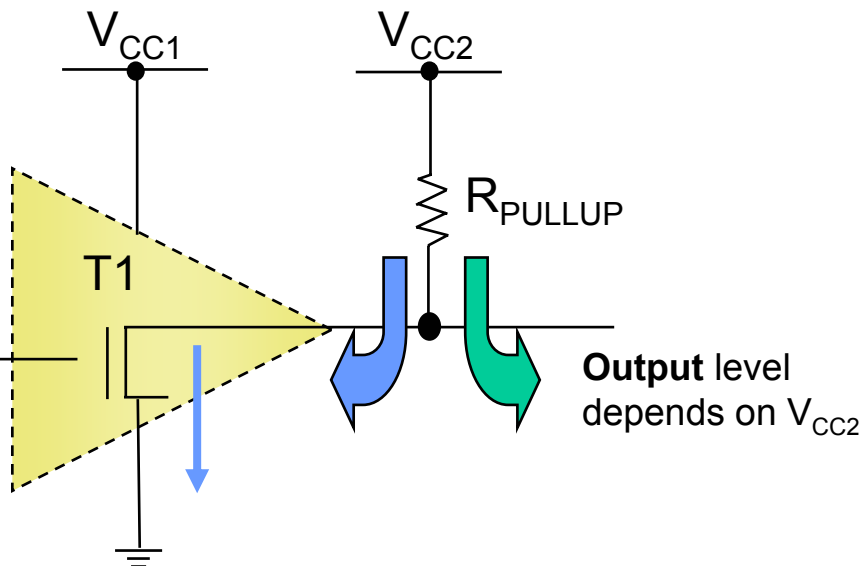

Also Possible

Wired-Function Technique

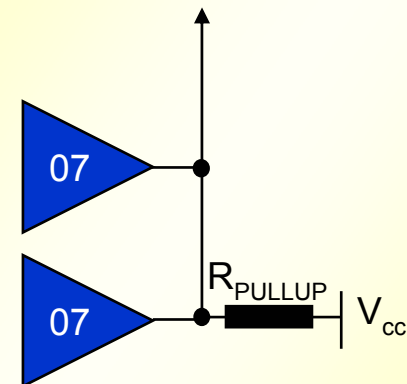


Phantom links on output side
can reduce component count.

Supply Voltage V_{CC1}	LV05A/06A/07A		LVC06A/07A		LVC1G07/2G07/3G07		Pullup resistor may be connected to	Level conversion range
	V_i Level	Speed	V_i Level	Speed	V_i Level	Speed		
1.8 V	NA	NA	1.8 V Levels	1 - 3.5 ns	1.8 V Levels	2.4 - 8.3 ns	1.8V, 2.5V, 3.3V and 5V	1.8 V \leftrightarrow 1.8V - 5.5V
2.5 V	2.5 V Levels	6.6 - 10.4 ns	2.5 V Levels	1 - 2.8 ns	2.5 V Levels	1 - 5.5 ns	1.8V, 2.5V, 3.3V and 5V	2.5 V \leftrightarrow 1.8V - 5.5V
3.3 V	3.3 V Levels	5 - 7.1 ns	3.3 V Levels	1 - 2.9 ns	3.3 V Levels	1.5 - 4.2 ns	1.8V, 2.5V, 3.3V and 5V	3.3 V \leftrightarrow 1.8V - 5.5V
5 V	5 V Levels	3.4 - 5.5 ns	5 V Levels	1 - 2.6 ns	5 V Levels	1 - 3.5 ns	1.8V, 2.5V, 3.3V and 5V	5 V \leftrightarrow 1.8V - 5.5V

Dual-Supply Level Translators

1-24

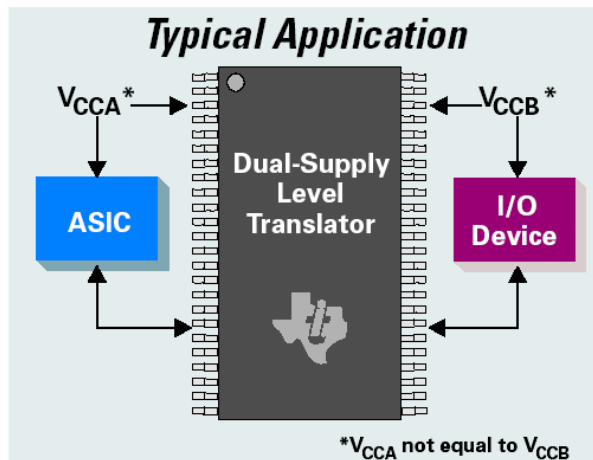

Features:

- Allow bi-directional voltage translation between different voltage nodes from 1.2-V to 3.6-V and 1.65-V to 5.5-V.
- Low power mode – if either VCC is turned off, then both ports are in the high-impedance mode, no power sequencing concerns (AVC devices and LVC 1- and 2-bit devices only)
- Bus-hold circuitry available (AVC devices only)
- I_{off} feature allows partial power-down operation (AVC devices and LVC 1- and 2-bit devices only)
- 1-through 32 bit options available

Device	Bit Width	V_{CCA}	V_{CCB}	Smallest Package
SN74AVC1T45 ¹	1	1.2 to 3.6-V	1.2 to 3.6-V	6-pin Nanostar/Nanofree
SN74LVC1T45	1	1.65 to 5.5-V	1.65 to 5.5-V	6-pin Nanostar/Nanofree
SN74AVC2T45 ¹	2	1.2 to 3.6-V	1.2 to 3.6-V	8-pin Nanostar/Nanofree
SN74LVC2T45	2	1.65 to 5.5-V	1.65 to 5.5-V	8-pin Nanostar/Nanofree
SN74AVC4T245 ^{1,2}	4	1.2 to 3.6-V	1.2 to 3.6-V	16-pin QFN
SN74AVC8T245 ¹	8	1.2 to 3.6-V	1.2 to 3.6-V	24-pin QFN
SN74LVC8T245 ^{1,2}	8	1.65 to 5.5-V	1.65 to 5.5-V	24-pin QFN
SN74LVCC3245A	8	2.3 to 3.3-V	2.7 to 5.5-V	24-pin TSSOP
SN74LVC4245A	8	4.5 to 5.5-V	2.7 to 3.3-V	24-pin TSSOP
SN74LVCC4245A	8	4.5 to 5.5-V	2.7 to 5.5-V	24-pin TSSOP
SN74AVC16T245 ¹	16	1.2 to 3.6-V	1.2 to 3.6-V	56-ball VFBGA
SN74AVCA164245 ¹	16	1.4 to 3.6-V	1.4 to 3.6-V	56-ball VFBGA
SN74AVCB164245 ¹	16	1.4 to 3.6-V	1.4 to 3.6-V	56-ball VFBGA
SN74LVC16T245 ^{1,2}	16	1.65 to 5.5-V	1.65 to 5.5-V	56-ball VFBGA
SN74AVC20T245 ¹	20	1.2 to 3.6-V	1.2 to 3.6-V	56-ball VFBGA
SN74AVC24T245 ^{1,2}	24	1.2 to 3.6-V	1.2 to 3.6-V	83-ball LFBGA
SN74AVC32T245 ¹	32	1.2 to 3.6-V	1.2 to 3.6-V	96-ball LFBGA
SN74AVCB324245 ¹	32	1.4 to 3.6-V	1.4 to 3.6-V	96-ball LFBGA


¹ Bus-Hold Option Available

² In Development


What is Little Logic?

Single Gate/Dual Gate/Triple Gate

Principle

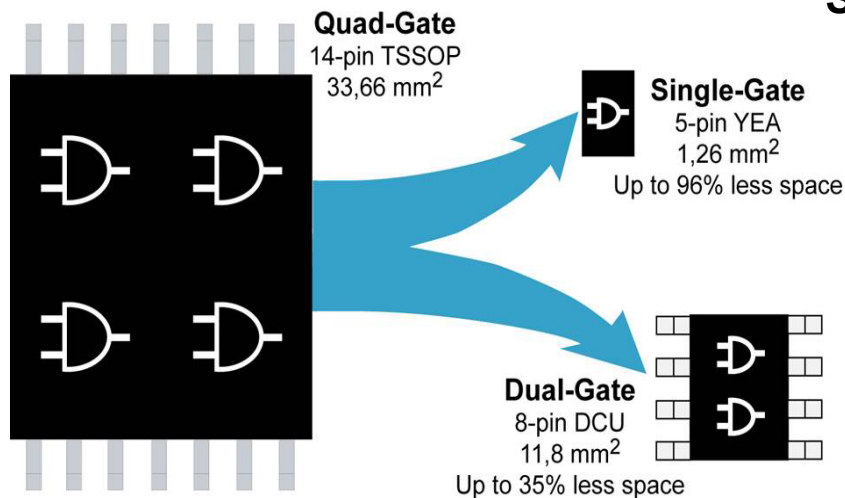

Quick Fixes for ASICs

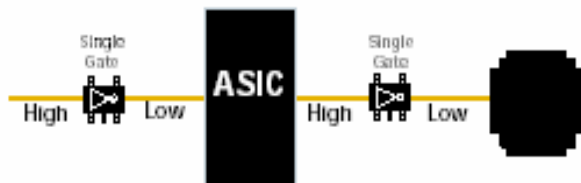

Naming

SN74 LVC 1G xx YEP R

Tape & Reel

R = 3000 piece
T = 250 piece

Package Type

YEP = NanoStar™ (230μ)
YZP = NanoFree™ (230μ)

DCK = SC-70

DBV = SOT-23

DCU = US-8

DCT = SM-8

Logic Function

xx

Gate Count

1G - Single Gate

2G - Dual Gate

3G - Triple Gate

Product Family

AHC/T, AUC, AUP,
CBT, LVC

Standard Prefix

 **TEXAS
INSTRUMENTS**

TI Little Logic Portfolio

1-26


- Provides wide range of operating voltages (0.8V to 5.5V)
- World's first 1.8V optimized logic family (AUC)
- World's lowest power logic family (AUP)
- Available in NanoStar and NanoFree (YEP/YZP)

<u>Family</u>	<u>Operating Voltage</u>	<u>Optimized Voltage</u>	<u>Prop Delay_{typ}</u>	<u>Output Drive</u>	<u>V_i Tolerant</u>	<u>I_{off}</u>
AUC	0.8-2.7V	1.8V	2.0ns	8mA	3.6V	Yes
AUP	0.8-3.6V	3.3V	5.4ns	4mA	3.6V	Yes
LVC	1.65-5.5V	3.3V	3.5ns	24mA	5.5V	Yes
AHC	2.0-5.5V	5.0V	5.0ns	8mA	5.5V	No
CBT	4.5-5.5V	5.0V	0.25ns	n/a	5.5V	n/a
CBTD	4.5-5.5V	5.0V	0.25ns	n/a	5.5V	n/a
CBTLV	2.3-3.6V	3.3V	0.25ns	n/a	3.6V	Yes



NanoStar™/NanoFree™ Package

- Offered in SnPb (NanoStar) and Pb-free (NanoFree)
- Available in solder bump size (230μ diameter)
- Bump locations facilitate device probing and rework
- 0.5-mm height meets aggressive LCD design requirements
- 70% smaller than industry standard SC-70 (DCK)
- 72% smaller than industry standard US-8 (DCU)
- Improved thermal and electrical characteristics
- Targeted for space constrained, portable applications: Cellular, DVD/CD ROMs, DVC, Digital Watch, DSC, MD/MP3/CD players, notebook computers, PC cards and PDA's

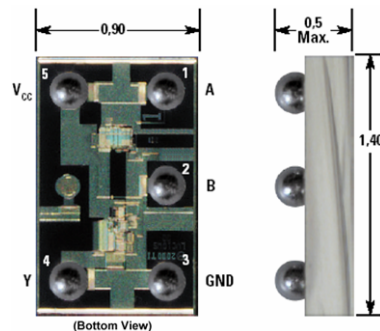

Package Designators

YEP = SnPb Bump

YZP = Pb-Free Bump


AUC

The World's First 1.8-V Logic

1-28

Features

- 1.8-V Optimized Performance
- V_{CC} Specified at 2.5 V, 1.8 V, 1.2 V
- 0.8 V Typical
- Balanced Drive
- 3.6-V I/O Tolerance
- Bus Hold Option
- I_{OFF} Spec for Partial Power Down
- ESD Protection
- Low Noise
- Alternate -Source Agreements

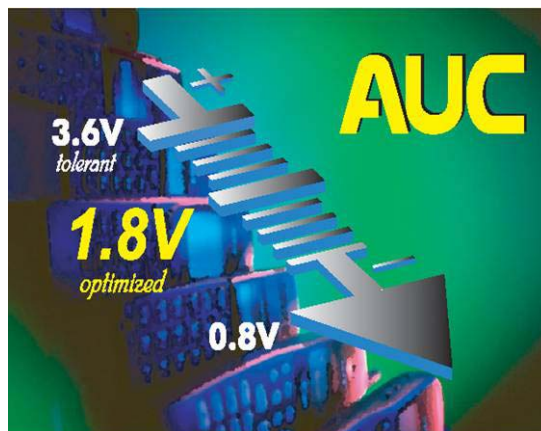

Advanced Packaging

NanoStar™ - YEP

NanoFree™ - YZP

SOT 23 - DBV (Microgate)

SC-70 - DCK (PicoGate)

TSSOP - PW & DGG

TVSOP - DGV

LFBGA - GKE, GKF

VFBGA - ZKE, ZKF

VFBGA - GQL

VFBGA - ZQL

QFN - RGY



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74AUC1G00	1.8 V	-8/8 mA	2.5 ns
SN74AUC16244	1.8 V	-8/8 mA	2.0 ns

Alternate Source: Philips, IDT

AUP

The World's Lowest Power Logic

Features

- Very low power consumption → high battery life
- Ideal for portable applications
- Excellent signal integrity
- Input hysteresis (250mV typ at 3.3V) allows for slow input transition
- Operating V_{CC} : 0.8V-3.6V (optimized at 3.3V)
- Best in class for speed-power optimization
- Balanced Drive
- 3.6-V I/O tolerant
- I_{OFF} Spec for Partial Power Down
- ESD Protection



Advanced Packaging

NanoStar™ - YEP

NanoFree™ - YZP



SOT 23 - DBV (Microgate)



SC-70 - DCK (PicoGate)



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74AUP1G08	3.3 V	−4.0/4.0 mA (static)	4.3 ns
	1.8 V	−1.9/1.9 mA (static)	8.2 ns
	1.2 V	−1.1/1.1 mA (static)	15.6 ns


ALVC Family

1-30

Features

- V_{CC} Specified at 3.3 V, 2.5 V, and 1.8 V
- Balanced Drive
- Bus-Hold Option
- Drive Capability –6/12 mA at 2.5 V
- Low Noise
- Damping Resistor Options
- ESD Protection

Advanced Packaging

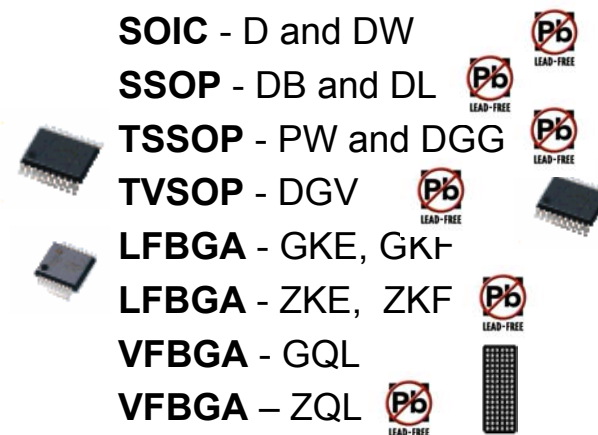

Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74ALVCH244	3.3 V	–24/24 mA	2.8 ns
SN74ALVCH16244	3.3 V	–24/24 mA	3.0 ns

Literature

ALVC Low-Voltage CMOS Logic Data Book
Lit # SCED006



Alternate Source

ALVC: Philips, Hitachi, IDT
VCX: Fairchild, ON, Toshiba

AVC Family

Features

- V_{CC} Specified at 3.3 V, 2.5 V, 1.8
- 3.3-V I/O Tolerance
- Sub-2.0-ns max T_{pd} at 2.5 V
- Bus Hold Option
- I_{OFF} for Partial Power Down
- Dynamic Output Control (DOC™) Circuit



Advanced Packaging

SOIC - DW

TSSOP - PW, DGG

TVSOP - DGV

LFBGA - GKE, GKF

LFBGA - ZKE, ZKF

VFBGA - GQL

VFBGA - ZQL



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74AVC16244	3.3 V	-12/12 mA (static)	1.7 ns
	2.5 V	-8/8 mA (static)	1.9 ns
	1.8 V	-4/4 mA (static)	3.2 ns

Alternate Source: Philips

DOC is a trademark of Texas Instruments.

LVC Family

1-32

Features

- V_{CC} Specified at 3.3 V, 2.5 V, and 1.8 V
- Balanced Drive
- 5-V I/O Tolerance
- Bus-Hold Option
- Series Damping Resistor Option
- I_{OFF} Spec for Partial Power Down
- ESD Protection
- LVC \underline{Z} has Power-Up 3-State for Hot Insertion

Advanced Packaging

NanoStar™ - YEP

NanoFree™ - YZP

SOT 23 - DBV (Microgate)

SC-70 - DCK (PicoGate)

SOIC - D and DW

SSOP - DB and DL

TSSOP - PW and DGG

TVSOP - DGV

LFBGA - GKE, GKF

LFBGA - ZKE, ZKF

VFBGA - GQL

VFBGA - ZQL

QFN - RGY



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74LVCH244	3.3 V	-24/24 mA	5.9 ns
SN74LVCH16244	3.3 V	-24/24 mA	4.1 ns

Literature

LVC Low-Voltage CMOS Logic Data Book

LVC Designers Guide Application Report

Lit # SCBD152

Lit # SDZAE16

Alternate Source

LVC: Philips, Hitachi, IDT

LCX: Fairchild, Motorola, Toshiba



LV-A Family

Features

- V_{CC} Specified at 5.0 V, 3.3 V, 2.5 V
- 5-V I/O Tolerance
- Balanced Drive
- I_{OFF} Spec for Partial Power Down
- ESD Protection
- Low Noise

Advanced Packaging



SOIC - D, DW

SOP - NS

SSOP - DB



TSSOP - PW, DGG

TVSOP - DGV

QFN - RGY, RGQ



LEAD-FREE



LEAD-FREE



LEAD-FREE



LEAD-FREE



LEAD-FREE



LEAD-FREE

Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74LV244A	5.0 V	-16/16 mA	6.5 ns
	3.3 V	-8/8 mA	10.0 ns

Literature

LV Low-Voltage CMOS Logic Data Book
Lit # SCBD152

Alternate Source

LV: Philips, Hitachi

LVQ: Fairchild, ON, Toshiba

LVX: Fairchild, ON



LVT Family

1-34

Features

- V_{CC} Specified at 3.3 V
- High-Drive Output – up to 64 mA
- 5-V I/O Tolerance
- Bus Hold Option
- Partial Power Down (I_{OFF})
- Power - Up 3-State (I_{OZPU} , I_{OZPD})
- Hot Insertion (I_{OFF} and PU3S)
- Low Noise
- Damping Resistor Options

Advanced Packaging



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74LVTH244	3.3 V	–32/64 mA	3.5 ns
SN74LVTH16244	3.3 V	–32/64 mA	3.2 ns

Literature

LVT Low-Voltage Technology Data Book
 Lit # SCBD154
 LVT-to-LVTH Conversion Application Report
 On the Internet



Alternate Source

LVT: Philips, Hitachi,
 Fairchild*, ON*

* Similar Device, No Second-Source Agreement

ALVT Family

Features

- V_{CC} Specified at 3.3 V and 2.5 V
- High-Drive Output – up to 64 mA
- 5-V I/O Tolerance
- Power-Up 3-State (I_{OZPU} , I_{OZPD})
- Partial Power Down (I_{OFF})
- Hot Insertion (I_{OFF} and PU3S)
- Bus Hold

Advanced Packaging



Device	V_{CC}	Drive	$T_{PD(MAX)}$
SN74ALVTH16244	3.3 V	–32/64 mA	2.4 ns
	2.5 V	–8/24 mA	3.0 ns

Literature

ALVT Low-Voltage Technology Data Book
Lit # SCED003

Second Source

ALVT: Philips





TI Signal Switch Product Overview

- Include Digital Bus Switches, Analog Switches, and Specialty Switches
- Provide High-Performance, Low-Power Bus-Interfacing When Signal Buffering is Not Required
- Support Digital, Analog, and System Specific Applications
 - PCI Interface
 - USB Interface
 - Memory Interleaving
 - Low-Distortion Signal Gating




Digital Bus Switch: Description

What are Bus Switches?

- ★ Simple digital FET switches that can quickly turn ON / OFF the connection to a line or bus
- ★ Provide industry standard functions and pinouts (i.e. '244, '245) in a full range of bit widths (from 32-bit Widebus to 1-bit Little Logic)
- ★ Offer extremely low power consumption (μA range), ideal for portable systems
- ★ High performance replacements for standard Logic devices when signal buffering (current drive) is not required

Bus Switch Circuit Diagram

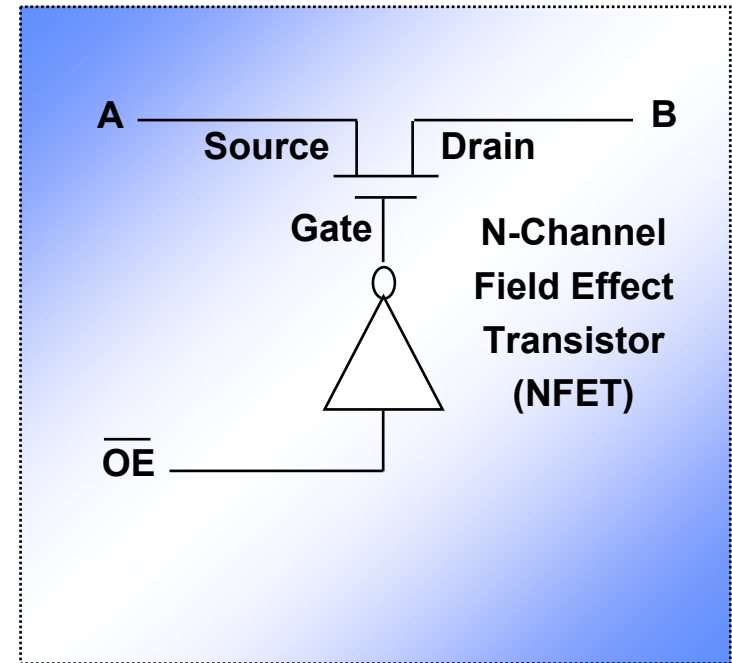

Digital Bus Switch: Key Characteristics

1-38


When ON, a Bus Switch Provides

- Bi-directional signal passing
- Near zero propagation delay (0.25ns) for maximum system performance
- Very low resistance ($R_{on} \approx 5\Omega$ to 10Ω)
- Very low capacitance ($C_{io} \approx 8\text{pF}$ to 12pF)
- Fast data throughput (100MHz to 500MHz)
- No drive current (pass-through current only)




When OFF, a Bus Switch Provides

- Excellent isolation with very high resistance ($R_{on} = 10\text{'s of } M\Omega$)
- Very low capacitance ($C_{io} \approx 3\text{pF}$ to 5pF) minimizes capacitive loading and signal distortion

Bus Switch Circuit Diagram

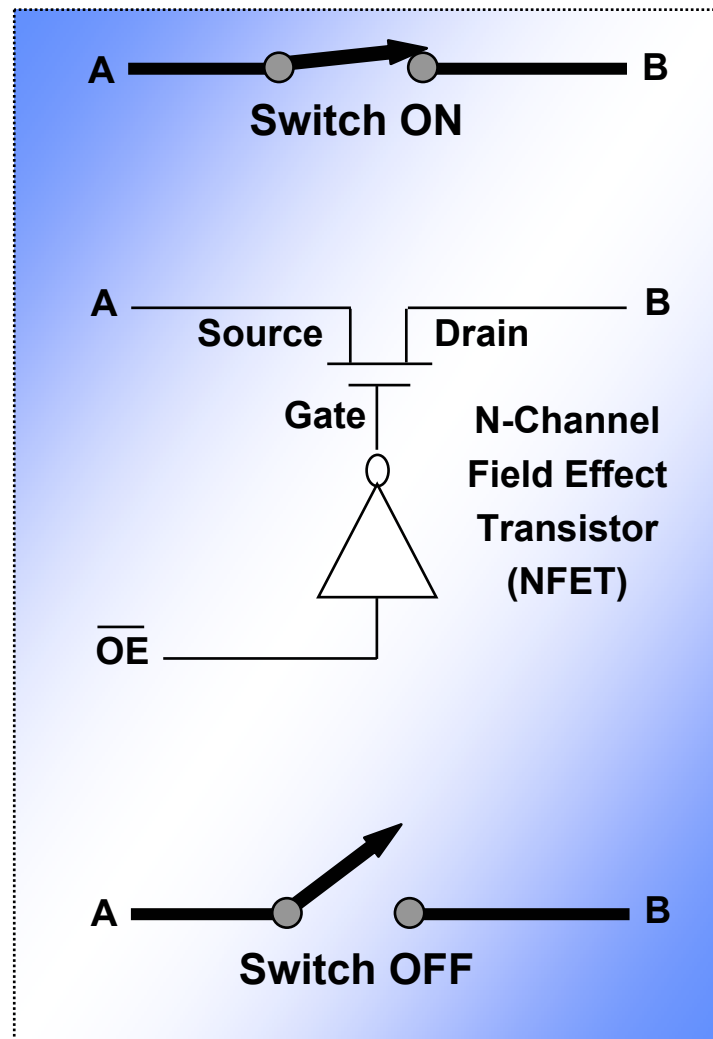

Digital Bus Switch: Configurations

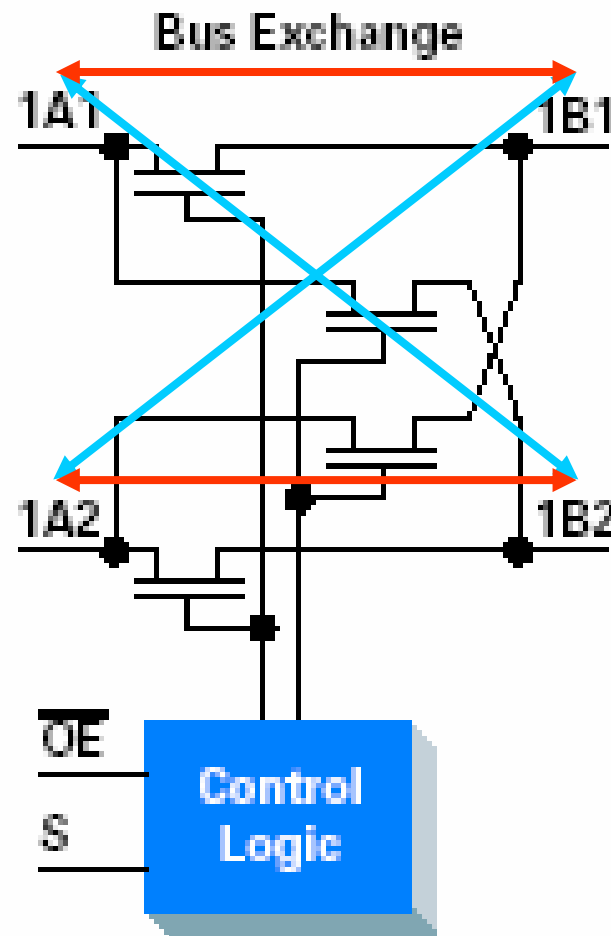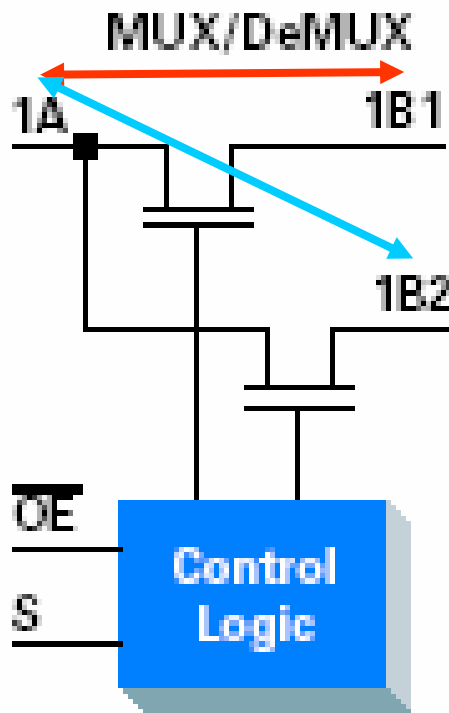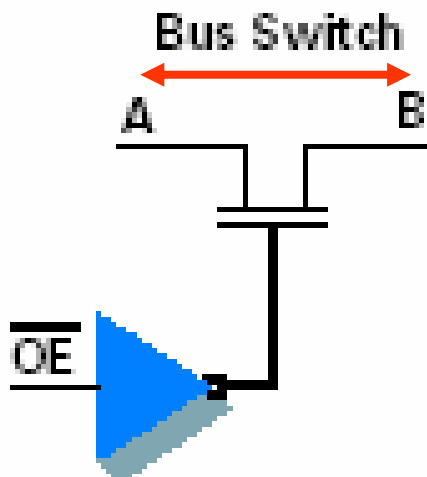

Flexible Configurations


- Many Bit width Options
- Many Signal Routing Options
(Isolation, MUX, DeMUX, Exchange)

Digital Bus Switch: CBT


CBT: 5V General Purpose Bus Switch Family

- NMOS Switch uses NFET
- Supports 5V operation ($V_{CC} = 4V - 5.5V$)
- Switch ON when positive signal applied at gate ($/OE$ low)
- Switch OFF when low signal applied at gate ($/OE$ high)
- Bi-directional operation (Source & Drain interchangeable)
- CBTD = NMOS Switch configured as level shifter with Level Shifting Diode
- CBTR features Series Damping Resistors for improved noise control

CBT3245 Logic Diagram

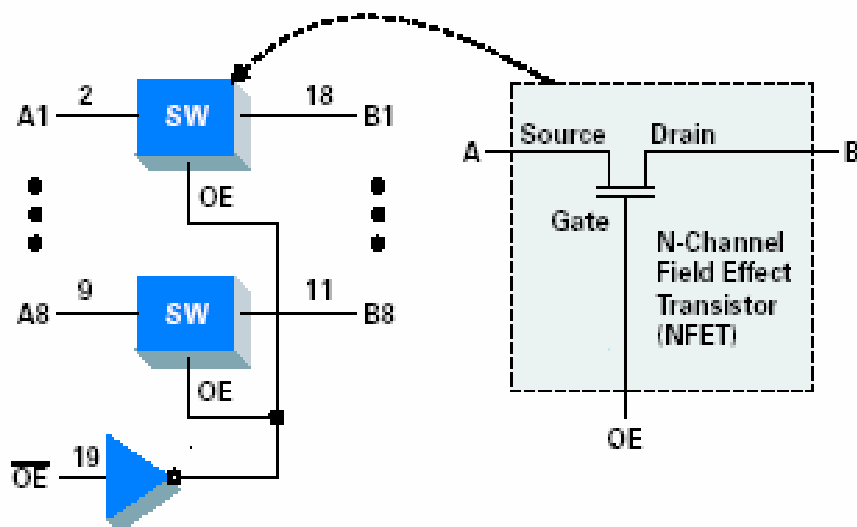

CBT V_{IN}/V_{OUT} Graph

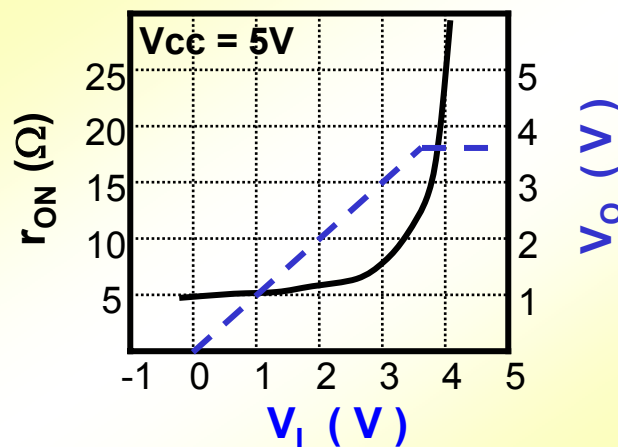


Digital Bus Switch: CBT-C



CBT-C: Improved 5V General Purpose Bus Switch Family

- Active Undershoot Protection Circuitry provides protection down to -2V
- Ioff supports Partial-Power-Down Mode Operation
- Enhanced performance vs. CBT family (faster T_{en}/T_{dis} , lower R_{on})
- Improved ESD protection; 2KV HBM, 1KV CDM

CBT3245C Logic Diagram

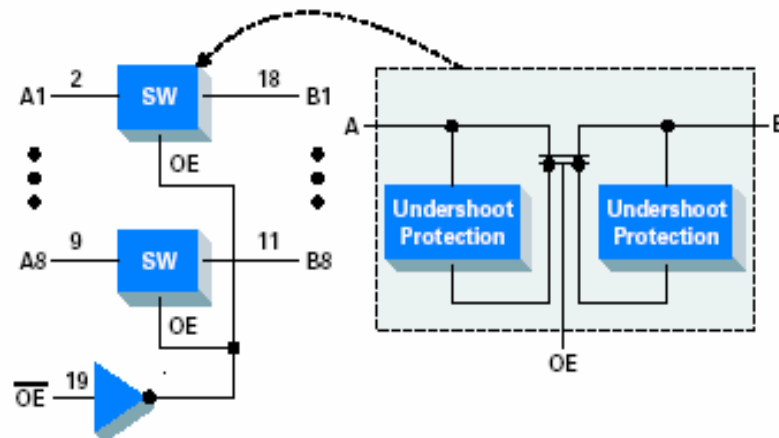


A Bus

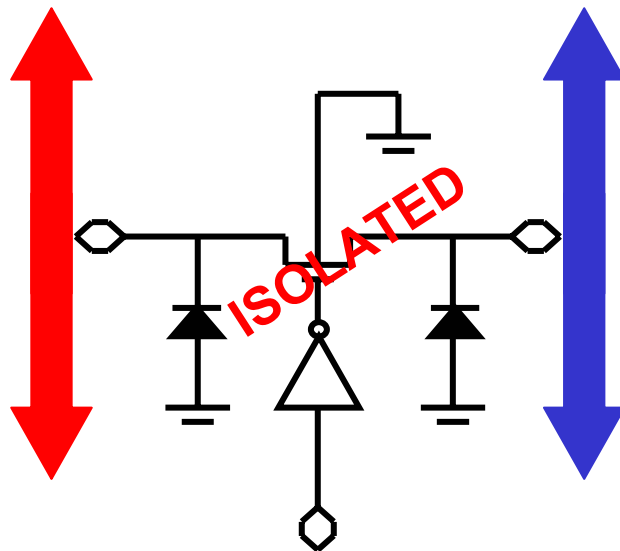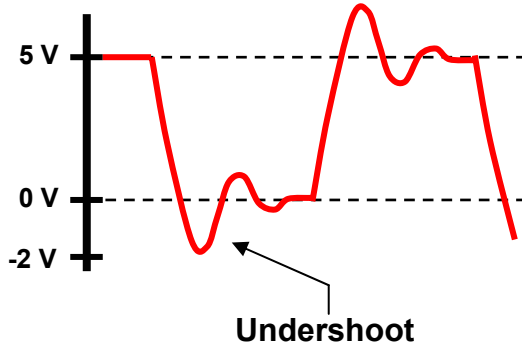

/OE = H (Switch OFF)

B Bus

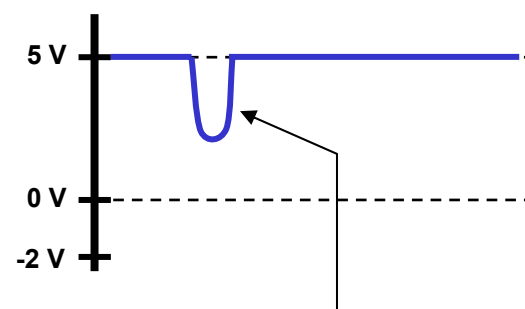


CBT-C prevents this type of undershoot induced data glitch on the B Bus

Digital Bus Switch: CBTLV


CBTLV: 3.3V / 2.5V General Purpose Bus Switch Family

- CMOS Switch consisting of an NFET and PFET in parallel
- Supports 3.3V / 2.5V Operation ($V_{CC} = 2.3V - 3.6V$)
- Switch ON when positive signal applied at NFET gate, and low signal applied at the PFET gate ($/OE$ low)
- Switch OFF when low signal applied at NFET gate, and positive signal applied at PFET gate ($/OE$ high)
- Bi-directional Operation (Source and Drain interchangeable)
- Offers rail-to-rail I/O (RRIO) signal transmission (no voltage clamping)

CBTLV 3245 Logic Diagram

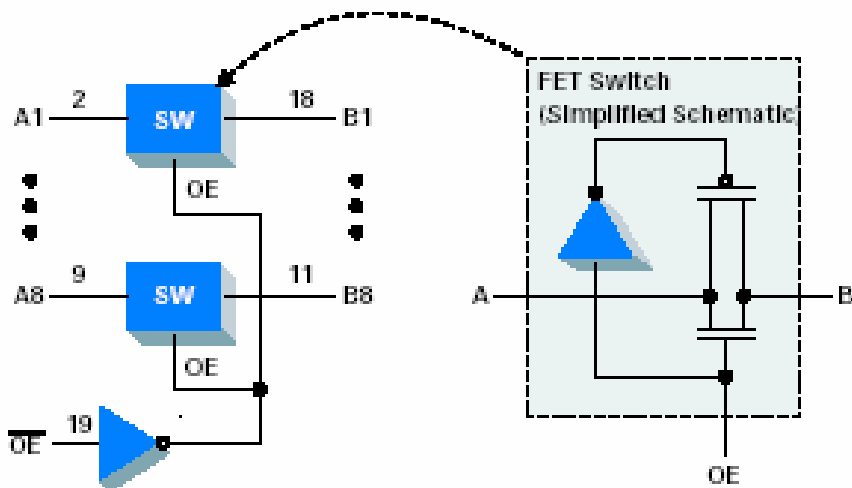

CBTLV V_{IN}/V_{OUT} Graph

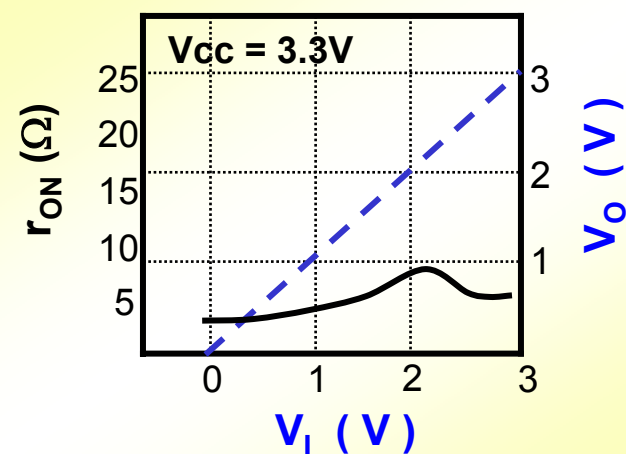


Digital Bus Switch: CB3Q


CB3Q: High-Bandwidth Bus Switch Family

- High-Bandwidth Data Path (Up to 500MHz)
- Provides Low and Flat On-State Resistance (R_{on}) Characteristics
- Supports Rail-to-Rail I/O (RRIO) Switching from 0V to 5V
- VCC Operating Range from 2.3V to 3.6V
- Ideal for Broadband Communications and Networking Systems
- Equivalent to IDTQS3VH HotSwitch™ Line of IDT QuickSwitch® Products

CB3Q3245 Logic Diagram

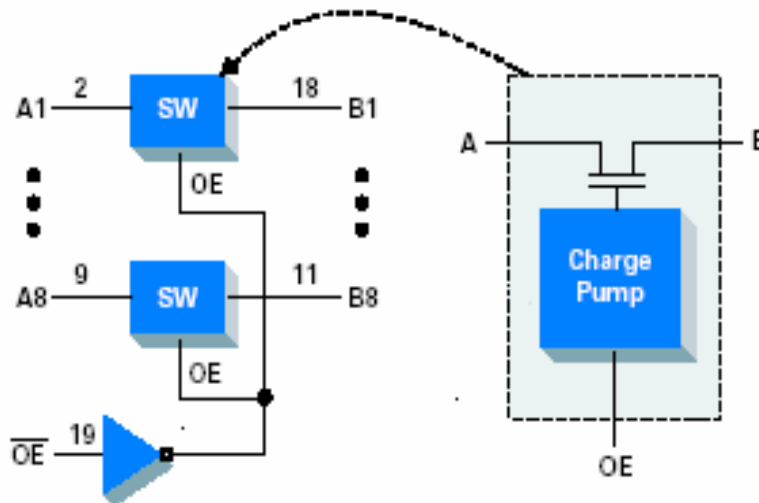

CB3Q V_{IN}/V_{OUT} Graph


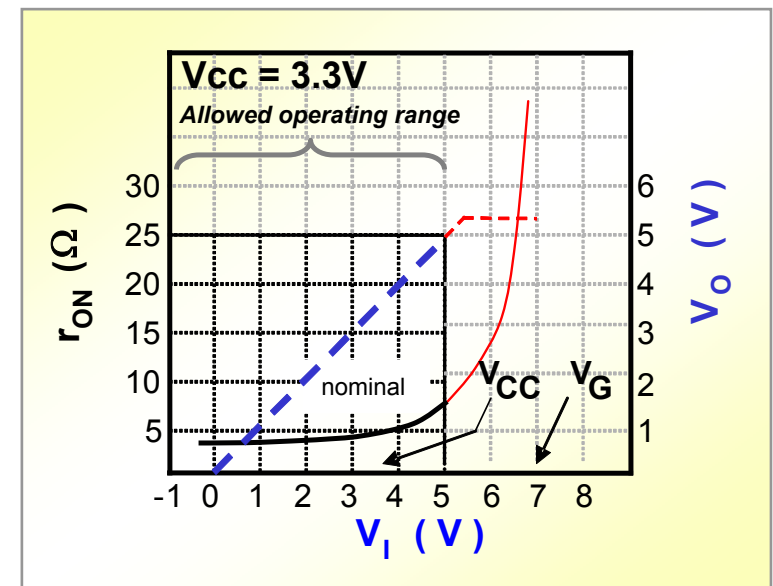


Digital Bus Switch: CB3T

CB3T: Low-Voltage Translator Bus Switch Family


- Output Voltage Translation Tracks Vcc
 - 5V Input to 3.3V Output Level Shift with Vcc = 3.3V
 - 5V / 3.3V Input to 2.5V Output Level Shift with Vcc = 2.5V
- Fully Supports Mixed-Mode Signal Operation (2.5V, 3.3V, and 5V Environments)
- VCC Operating Range From 2.3V to 3.6V
- Low Icc Ideal for Notebooks, PDAs, Cell Phones, Digital Cameras

CB3T3245 Logic Diagram

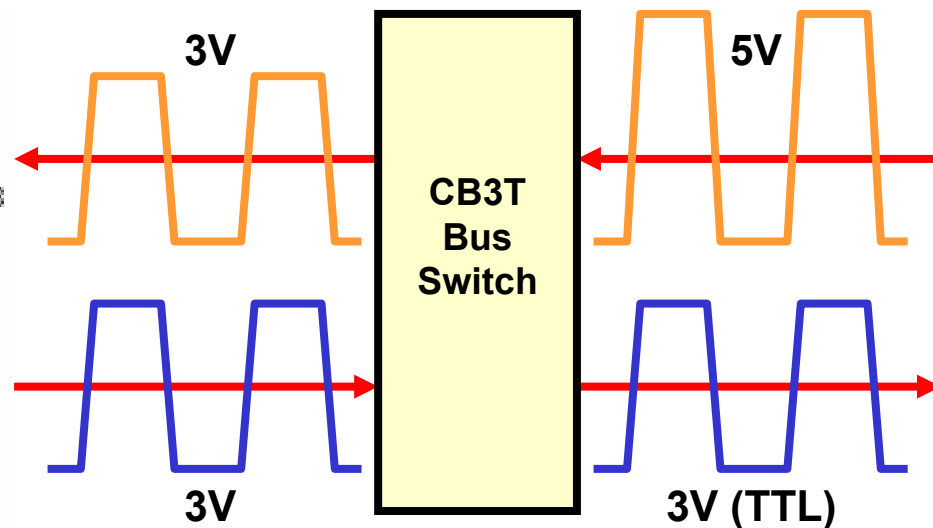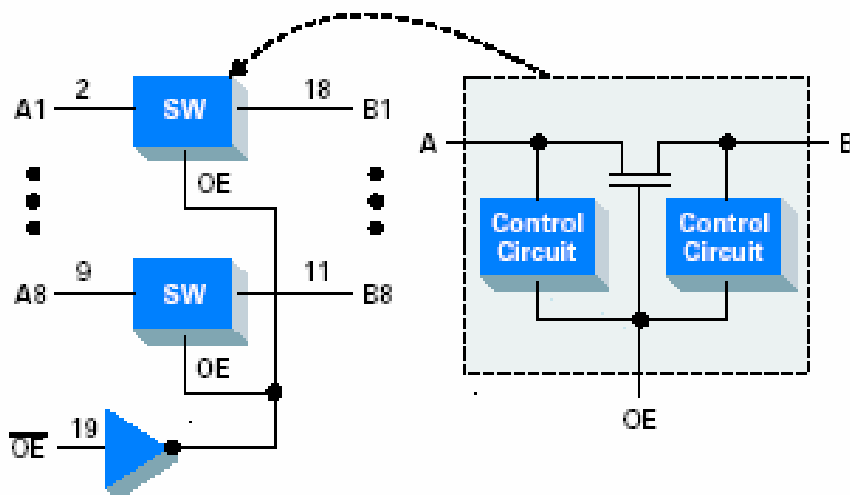

Digital Bus Switch: r_{on} Characteristics

Comparison of typical r_{on} vs. V_{IN} for the CBT, CBTLV and CB3Q Bus Switch Families

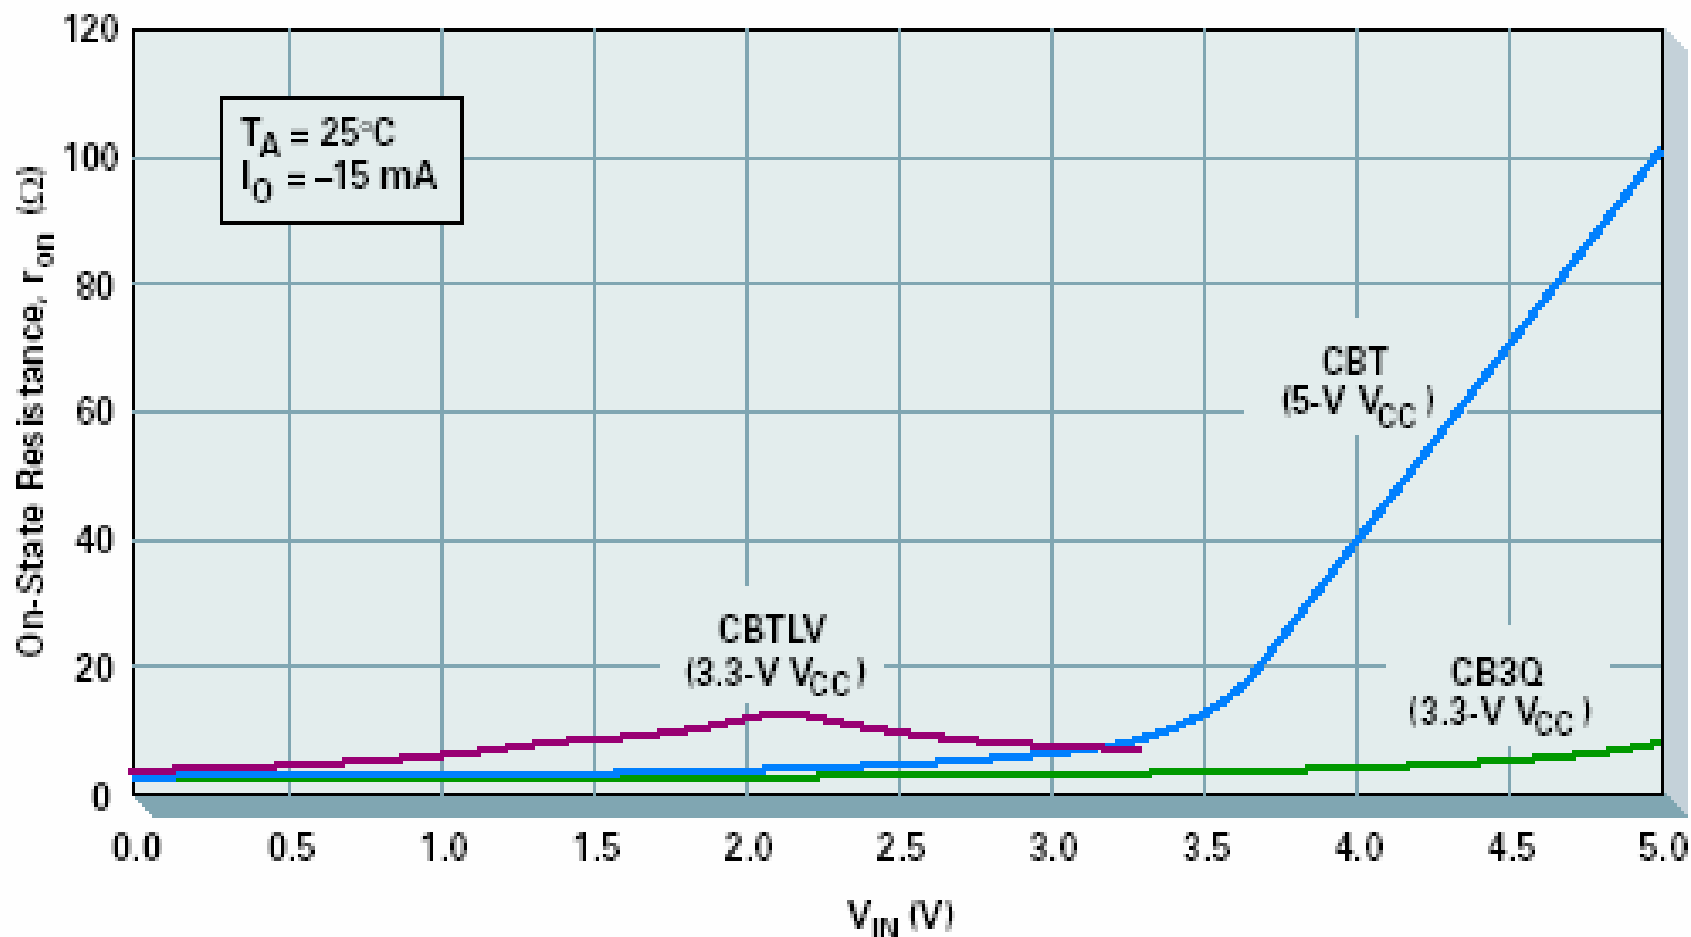


Digital Bus Switch Naming

1-46

CBT & CBT-C

- C-rev to indicate new improved performance CBT-C products (CBT####**C**)
- Both CBT and CBT-C solutions to be offered, (no obsolescence planned)

New CBT-C, CB3Q & CB3T Families

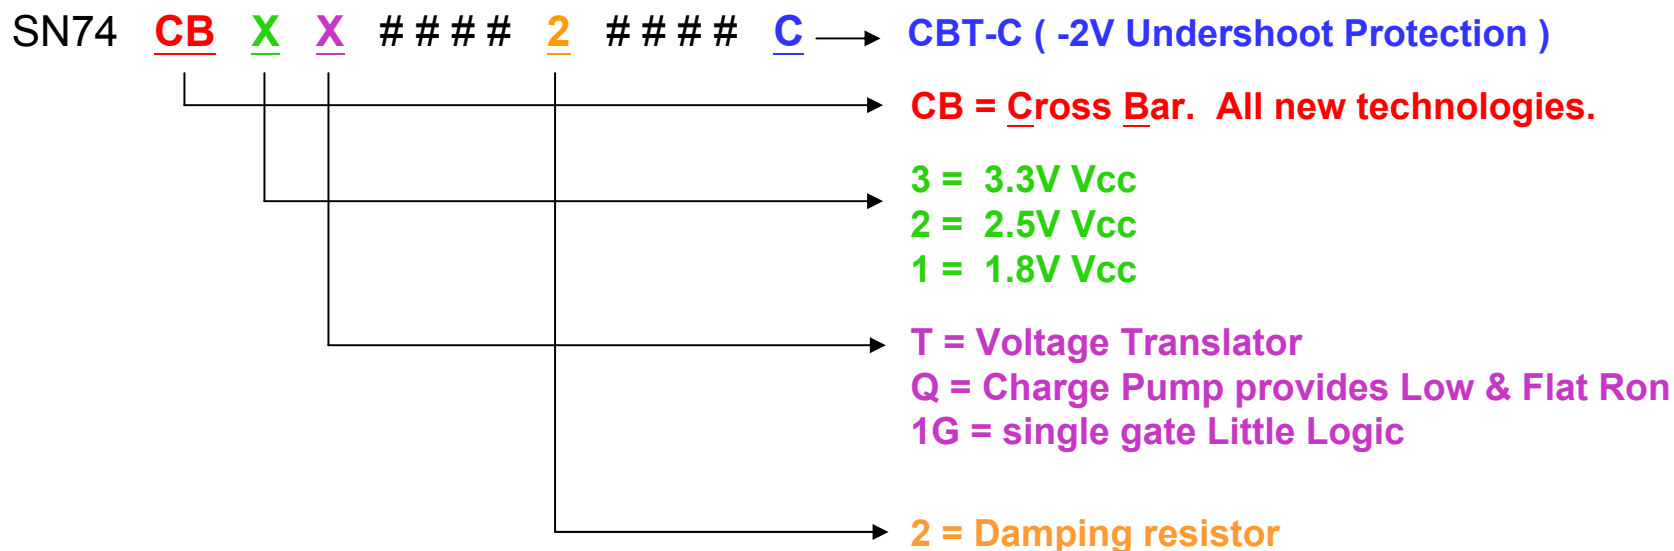

- I/O Tolerant feature is a Default Option stated on the datasheet
- Undershoot Performance is a Default Option and stated on the datasheet

Analog Switch: Families and Configurations

AUC (Advanced Ultra-Low-Voltage CMOS Technology)

- Operational from 0.8V to 2.5V (3.6V tolerance)
- Sub-1V family operates at low power and high speed
- Supports overall system signal integrity
- Ideal for portable consumer electronics

LVC (Low-Voltage CMOS Technology)

- Specially designed for 3V power supplies
- 5V tolerant inputs and outputs

LV-A (Low-Voltage CMOS Technology)

- 5V tolerance, fast performance, partial power down
- Superior migration path from HC/HCT technology
- Voltage operation range from 2V to 5.5V V_{CC}

HCT (High-Speed CMOS Technology)

- Low power, low noise, at a low price
- TTL-compatible inputs


HC (High-Speed CMOS Technology)

- Low power & low noise at a low price


CD4000 (CMOS Technology)

- Maximum DC supply-voltage rating of 20V
- Wide operating voltage range supports:
Instrumentation, Control, and Communications


1-Channel SPST




1-Channel SPDT




2-Channel SPST




2-Channel SPDT




2-Channel DPST



4-Channel SPST



4-Channel SPDT



Specialty Switch: TL52055 Wide-Bandwidth, 2-Input, 1-Output, 3-Circuit Video Switch

1-48

Features:

- Low Differential Gain and Phase (DG = 0.3%, DP = 0.3° Typ)
- Low Crosstalk (XTALK = -75 dB Typ at 4.43 MHz)
- Vcc Operating Range From 4.5 V to 9 V
- Bi-CMOS Technology
- High Input Impedance ($Z_i = 20\text{k } \Omega$ Typ)


Benefits:

- Supports Composite Video Switching
- Wide Frequency Range (0 dB at 40 MHz, Vcc = 5 V) Supports High-Frequency Video Applications
- Available in Lead-Free (Per JEDEC STD-020B) Packages: SOIC16 (D), TSSOP16 (PW)

Applications:

- TVs (CRT, LCD, PDP, HDTV)
- DVD Players
- VCRs
- Set Top Box
- Video Projectors
- Car Navigation Systems


1-63

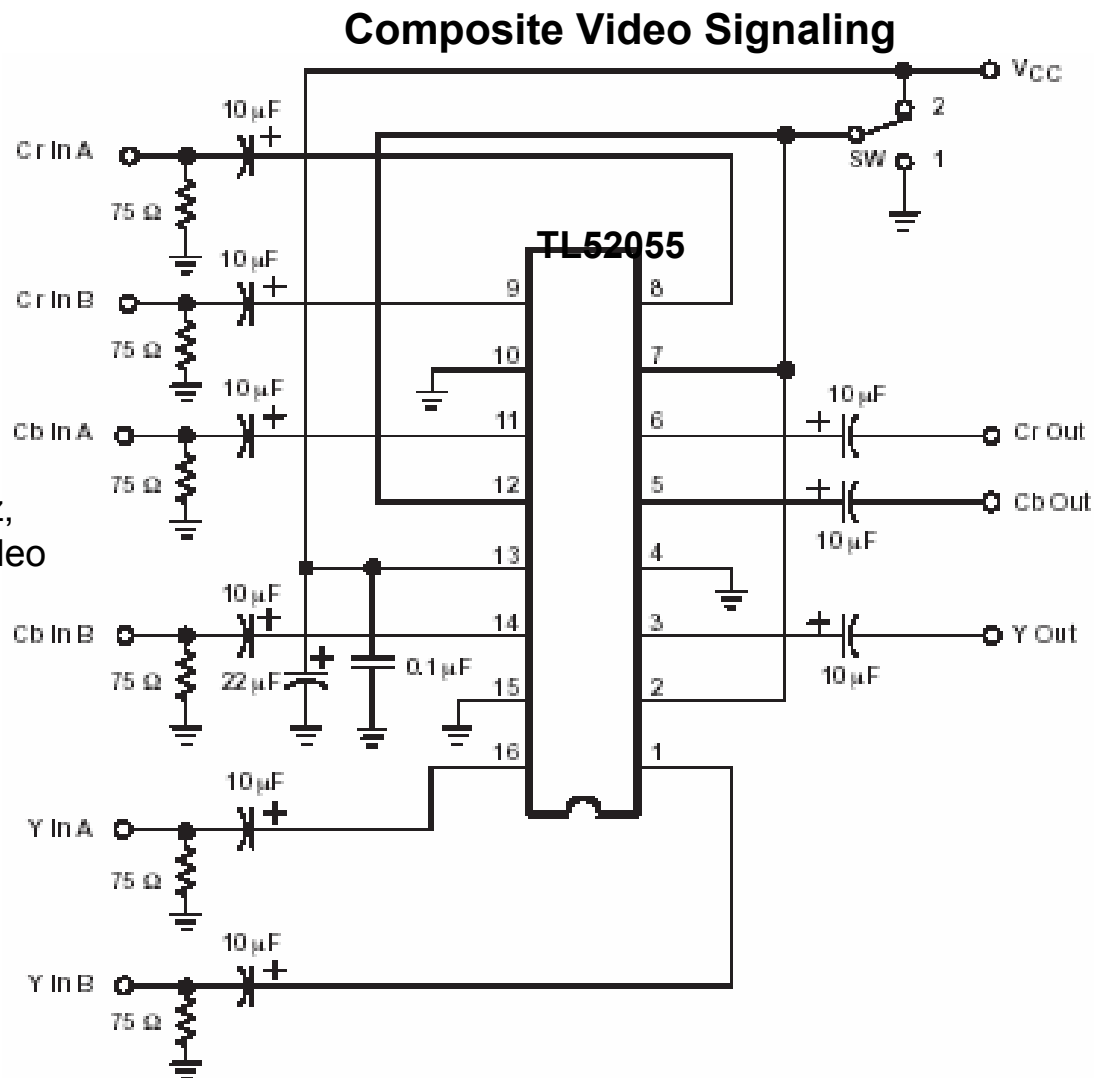

TVC

Translation Voltage Clamp

logic diagram (positive logic)

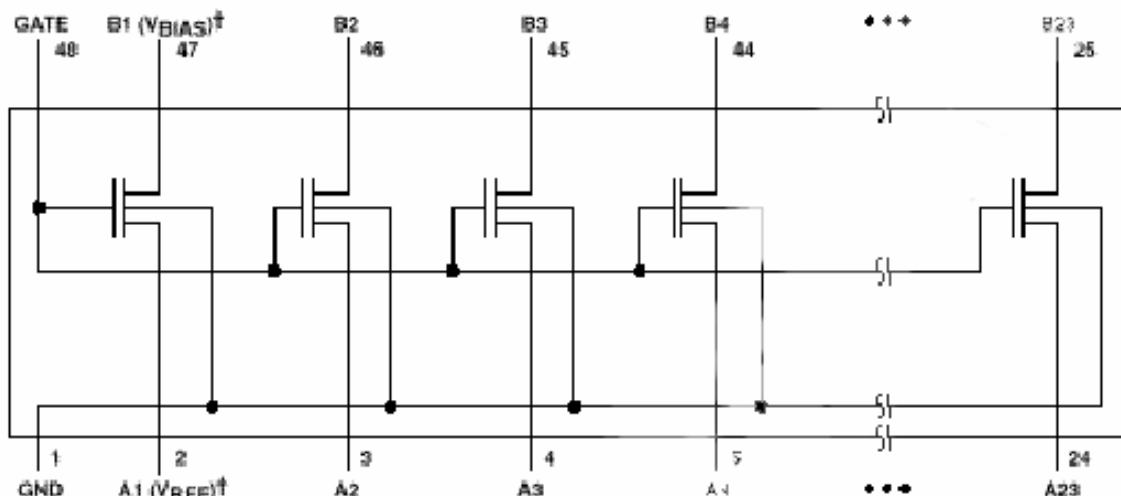

[†] The (V_{GPF}) and (V_{GAS}) may be applied to any one of the pass transistors. The GATE must be externally connected to the V_{GAS} .


- Overshoot protection
- Voltage translator or a voltage clamp
- Abs 7 to -0.5V

<u>Device</u>	<u>Bit</u>
TVC3306	2
TVC3010	10
TVC16222A	22

What is GTL/GTLP?

1-50


- Open drain n-channel CMOS outputs. The pull-up resistor pulls the signal high and the device pulls the signal low
- Receiver stage is a differential input with external V_{REF} . V_{REF} is derived from a simple R/2R voltage divider of the termination voltage, V_{TT}
- GTLP enjoys increased noise margin over GTL
- GTLP edge rates have been optimized for distributed loads
- The reduced voltage swing reduces power consumption and EMI

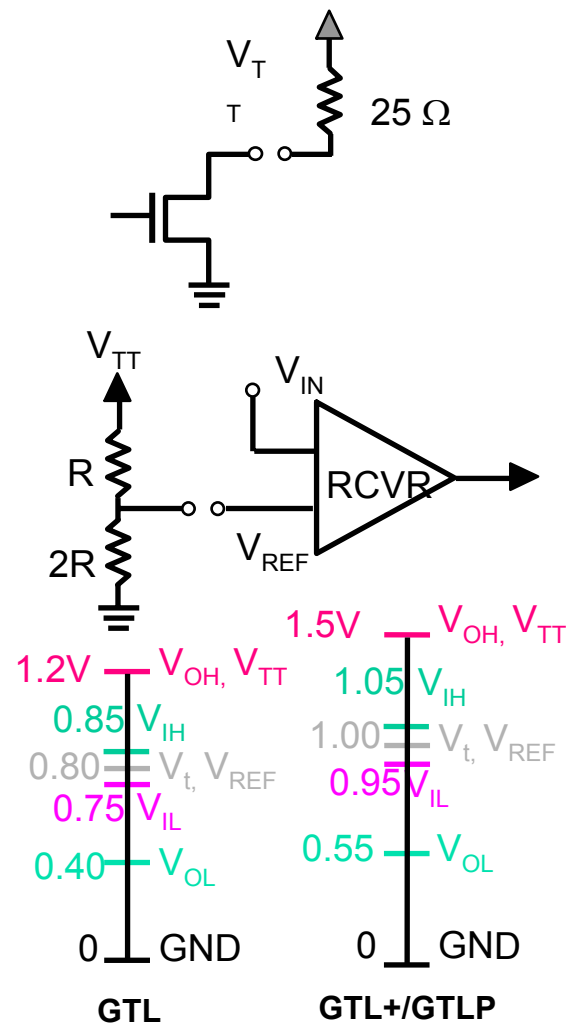

GTLP Is a Bidirectional Translator

CARD SIDE

BACKPLANE SIDE

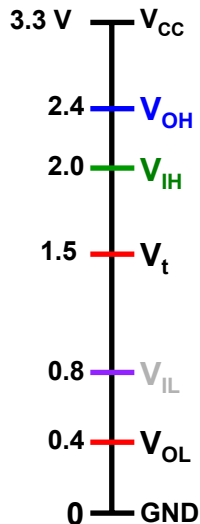

LVTTTL

A Port and Control Pi

3.3-V V_{CC}


5 V Tolerant

Drive +/-24 mA

Bus-Hold Option

Flow-Through Pinout

DGG, DGV, OR DL PACKAGE
(TOP VIEW)

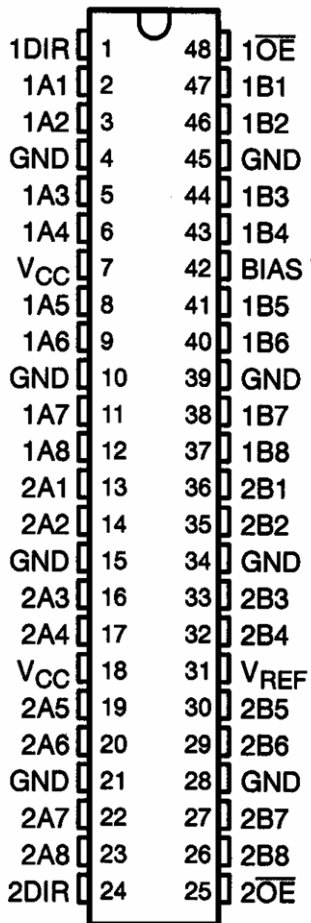


**TI-OPC™ Overshoot
Protection Circuitry**

**OEC™ Improved
Output Edge Control**

Live Insertion


Reduced EMI

**Edge Rate Control
(ERC)**

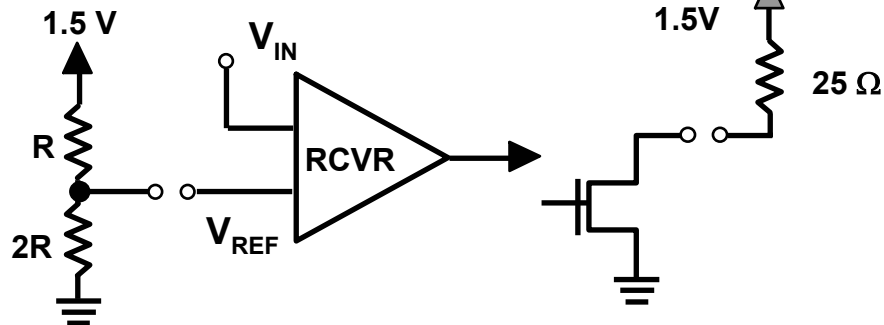

Differential Input

Sink 50 mA or 100 mA



**GTLP
B Port**


GTLP and VME Are Specifically Designed for High-Performance Multi-slot Parallel Backplanes

1-52

- Mass Storage
- ISDN Remote Access
- Internet Routers
- ATM Switches
- Wireless Base Stations
- Flight Equipment

GTLP

- Open-drain technology
- Allows high frequencies (up to 100-MHz clock)
- Standard pinouts allow ease of migration from standard logic
- Improved signal integrity over standard logic

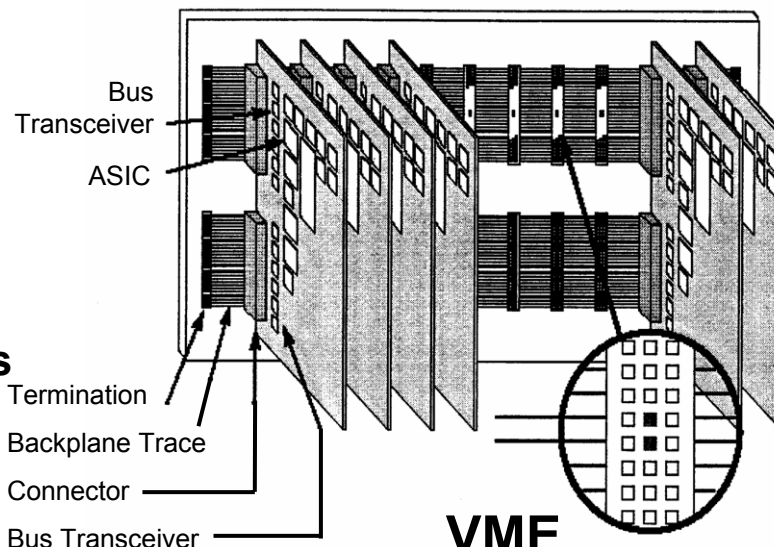

VME

- Push-pull output structure
- Transmits data at 40 Mbit/s on legacy termination topologies
- Backward compatible to existing VME backplane
- Reduced input threshold for greater noise immunity

- Industrial Controls
- Aerospace
- Transportation
- Medical
- Instrumentation Systems

GTLP

Distributed-Load Devices

Features

- CMOS
- 3.3-V V_{CC} – 5 V Tolerant
- I_{off} , PU3S, and BIAS V_{CC}
- Slow Edge Rates – ERC
- A Port
 - +/-24 mA – SDR +/-12 mA
 - Bus-Hold Option (on Die)
- B Port
 - V_{TT} 1.2 V to 2.1 V (BTL)
 - 100 mA (22- Ω Effective Characteristic Impedance)
 - TI-OPC
 - Low C_{IO}

Benefits

- ✓ Low Power Consumption
- ✓ Mixed Supply Capability
- ✓ Supports Live Insertion
- ✓ Reduced EMI
- ✓ A Port
 - ✓ Standard CMOS Output
 - ✓ No Need to Use Pullup/Pulldown
- ✓ B Port
 - ✓ Can Use GTLP in BTL Applications
 - ✓ High Drive for Heavily Loaded Systems
 - ✓ Improved Signal Integrity
 - ✓ Helps Live Insertion

SN74VMEH22501/A UBT

1-54


The VME-Compatible Device for Low-Voltage Environments

Benefits:







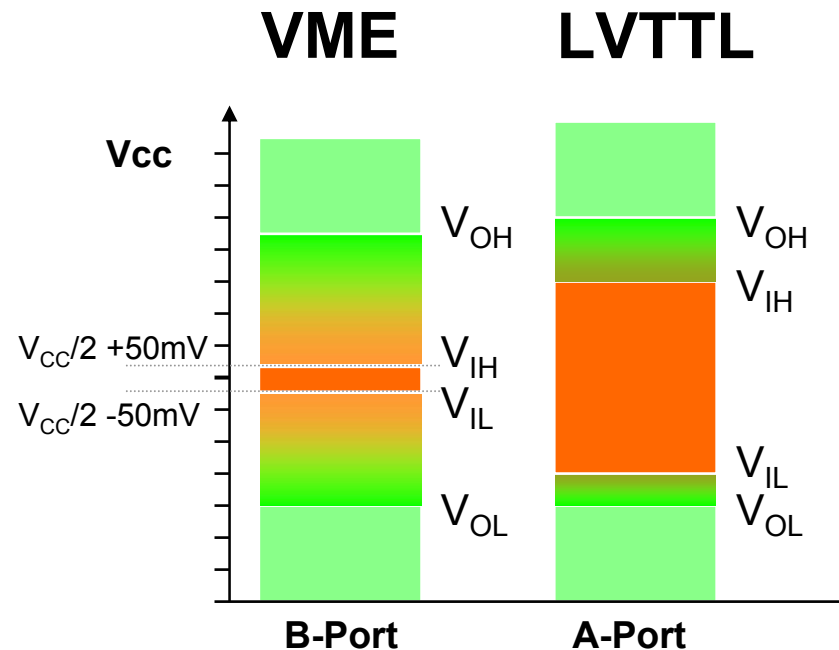


























- Extends life of VME characteristic bus
- Supports 2eVME and 2eSST protocols (VITA1.5)
- Increased noise immunity
- Supports transparent, latched or clocked mode
- 5-V tolerance at both ports
- Full live insertion capability with pre-charge
- Bus-hold and series resistors on A-Port
- Up to 320 MBps on standard VME backplane and up to 1 GBps on VME320 (star topology)
- VMEH22501 – 0 to 85 C
- VMEH22501A – -40 to 85C

Characteristics:

- Tighter input threshold ($V_{CC}/2 \pm 50 \text{ mV}$)
- -48/64 mA drive capability
- Huge AC pull-up/down drive capability to drive backplanes (slow edge rates)
- $\text{BIAS-}V_{CC}$ used to control pre-charge during live-insertion



Packaging Options

Pin	SOIC	SOP	SSOP	QSOP	TSSOP	VSSOP	TVSOP	SOT	BGA	QFN	WCSP
5								DCK DBV			YEP/YZP [†]
6								DCK DBV			YEP/YZP [†]
8	 D	 PS	 DCT		 PW	 DCU					YEP/YZP [†]
14	 D	 NS	 DB		 PW		 DGV			 RGY	
16	 D  DW	 NS	 DB	 DBQ	 PW		 DGV			 RGY	
20	 DW	 NS	 DB	 DBQ	 PW		 DGV		VFBGA ^{††}  GQN/ZQN	 RGY	
24	 DW	 NS	 DB	 DBQ	 PW		 DGV				

logic.ti.com

[†]WCSP is the Industry Standard reference for DSBGA which includes the NanoStar™ (YEP) and NanoFree™ (YZP) packages

^{††}VFBGA represents the MicroStar Jr™ packages and LFBGA identifies the MicroStar BGA package™ *Z* indicates Lead-Free Option

Packaging Options

Pin	SOIC	SOP	SSOP	QSOP	TSSOP	VSSOP	TVSOP	SOT	BGA	QFN	WCSP
28	 DW		 DL		 PW						
48			 DL		 DGG		 DGV		 VFBGA ^{††} GQL/ZQL		
56			 DL		 DGG		 DGV		 VFBGA ^{††} GQL/ZQL		
64					 DGG						
80							 DBB				
96									 LFBGA ^{††} GKE/ZKE		
114									 LFBGA ^{††} GKF/ZKF		

logic.ti.com

[†]WCSP is the Industry Standard reference for DSBGA which includes the NanoStar™ (YEP) and NanoFree™ (YZP) packages

^{††}VFBGA represents the MicroStar Jr™ packages and LFBGA identifies the MicroStar BGA package™ "Z" indicates Lead-Free Option



TI FIFO Products


- TI FIFOs Provide Cost Effective “Pin-for-Pin Functional Equivalents” to IDT’s 18-bit and 36-bit Synchronous FIFOs
- TI DSP-Sync FIFOs Optimize DSP Performance in High Bandwidth Applications by Eliminating Data Bottlenecks
- TI DSP-Sync FIFOs provide a *DSP Glueless Interface* to Leading Edge TI TMS320™ DSPs
- TI Technology Leadership Creates World Class FIFO Performance with Industry's Fastest 3.3V FIFOs
- High Bandwidth Applications Include:
 - Wireless Base Stations
 - Remote Access Servers (RAS)
 - Digital Subscriber Line (DSL)
 - Network Security Cameras
 - Medical & Industrial Imaging
 - Multi-Channel Telephony
 - Gigabit-Ethernet Routers
 - ATM Switches & SONET/ATM Multiplexers

TI FIFO

Product and Technology Roadmap


Configuration:

Performance (F Clock in MHz)

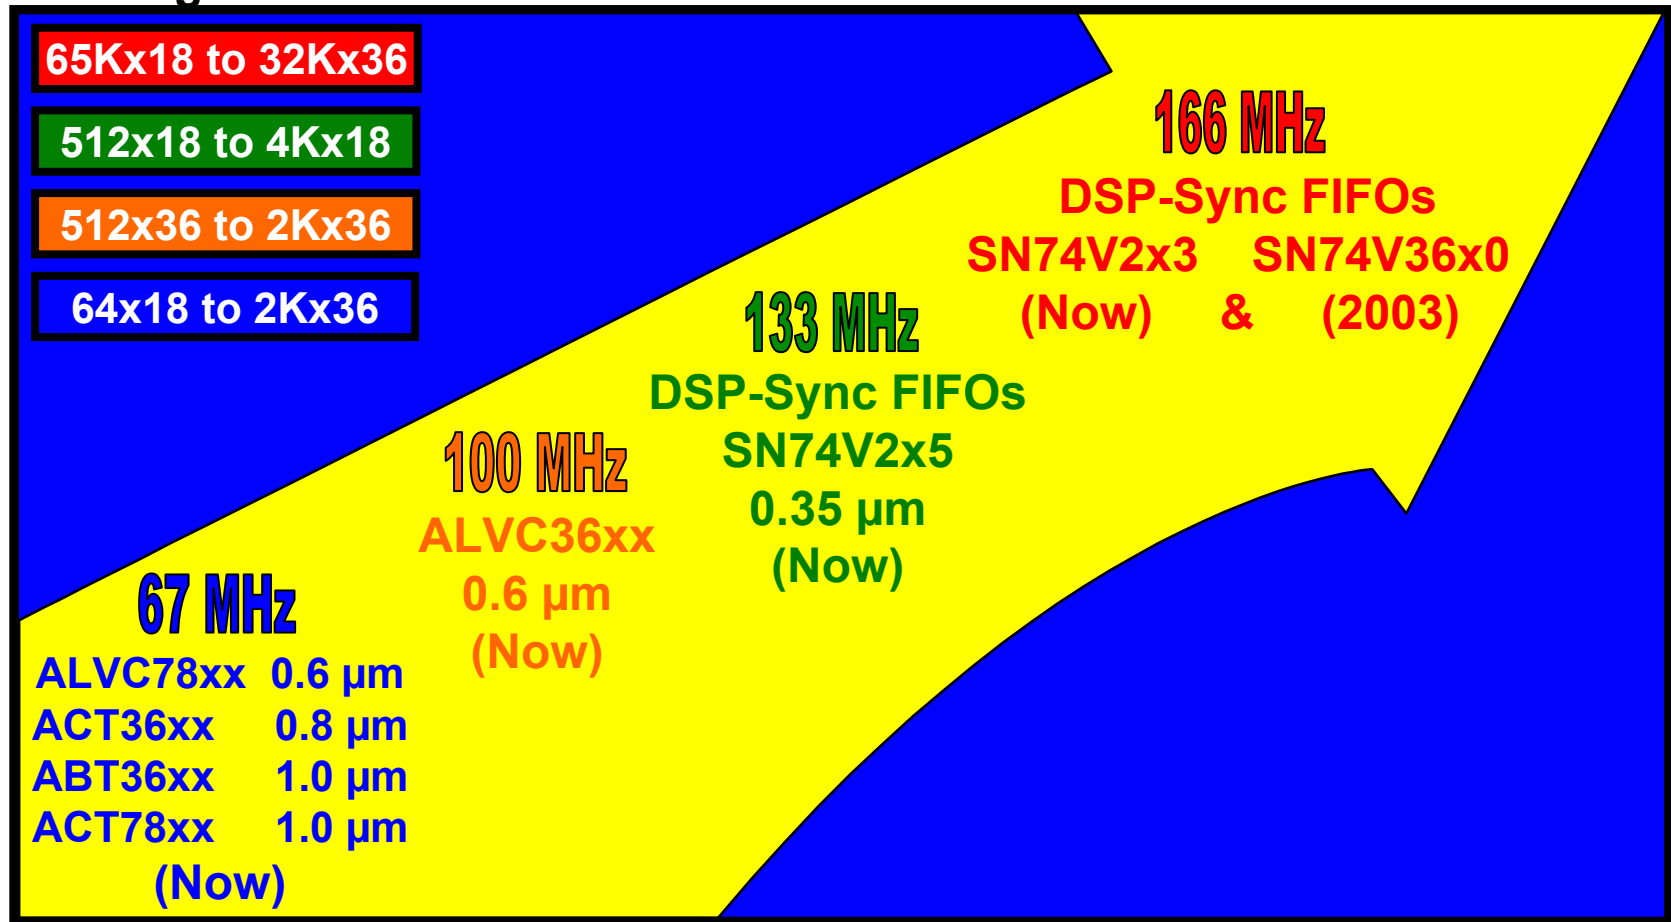

(Availability)


TI FIFOs Optimize System Performance

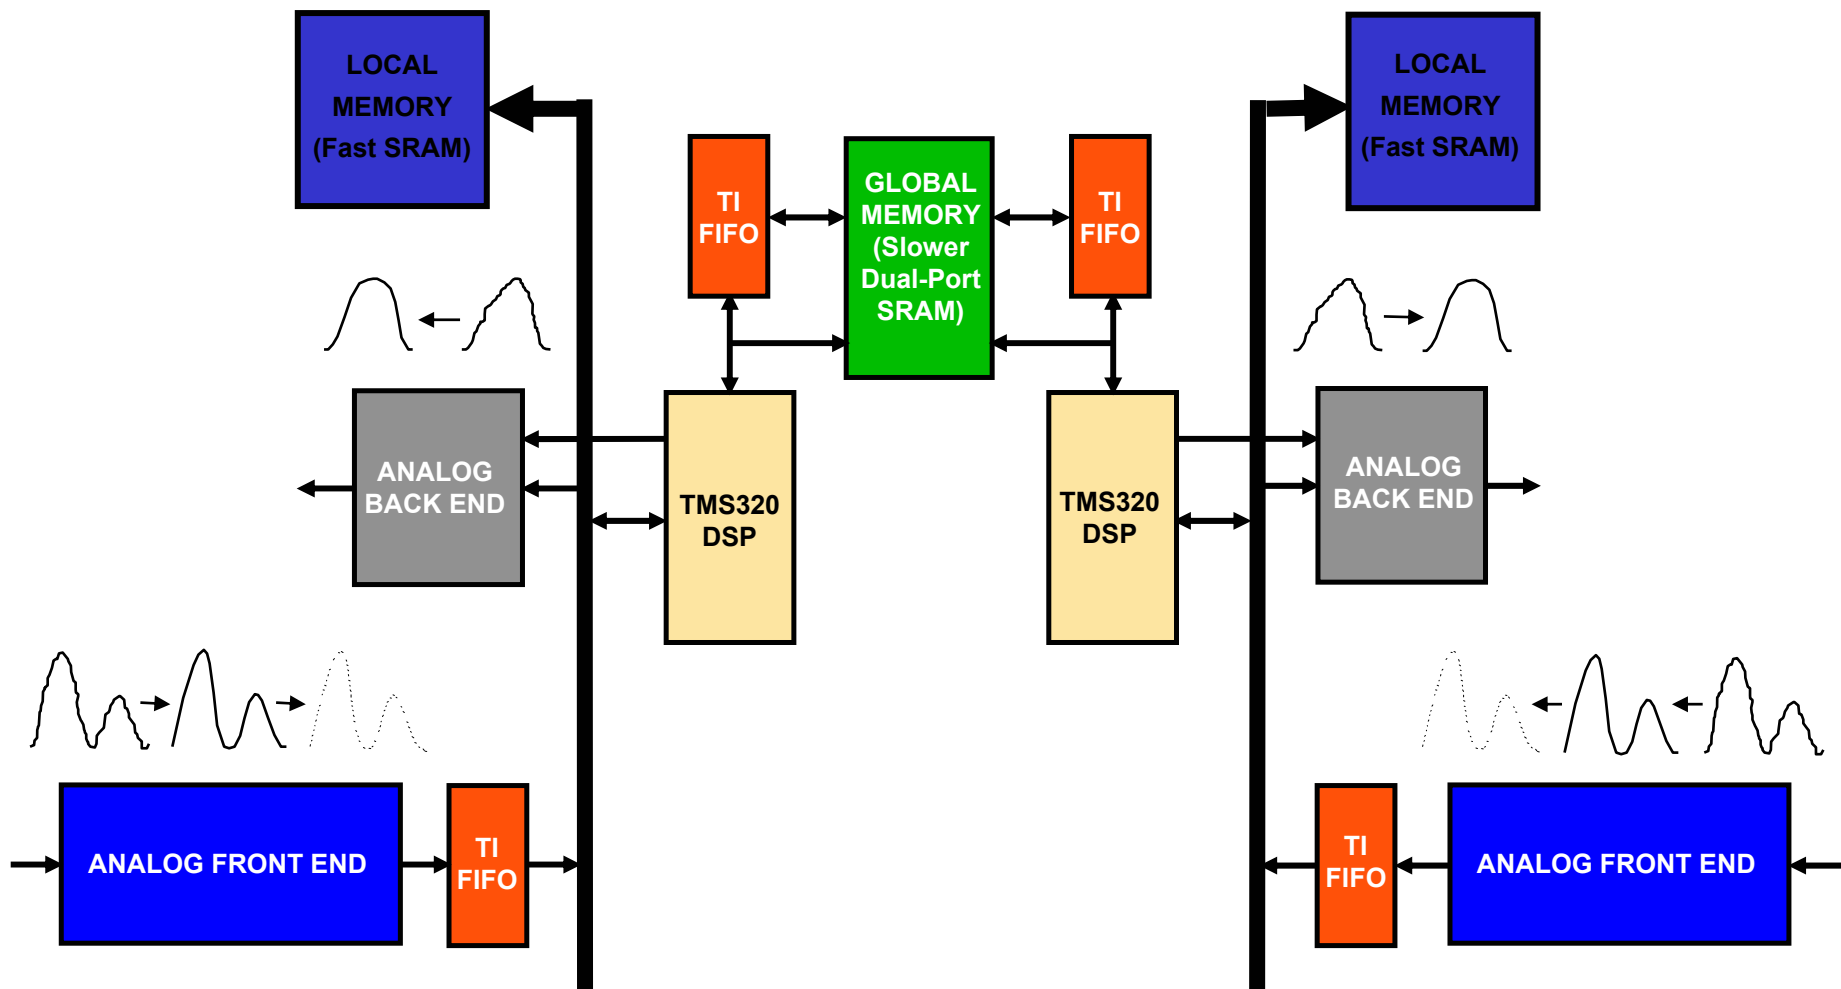


IEEE Std 1149.1 (JTAG) Boundary-Scan Logic

Generic IEEE 1149.1 functionality


- ◆ Between each I/O pin and the chip, there must be a boundary scan cell (BSC).
- ◆ All BSC's must be connected to the serial scan path, which functions like a shift register.
- ◆ The BSC's are controlled via four test control pins:
 - TCK (test clock)
 - TMS (test mode select)
 - TDI (test data input)
 - TDO (test data output)
- ◆ The BSC allows capturing data from and providing data to the chip data path.

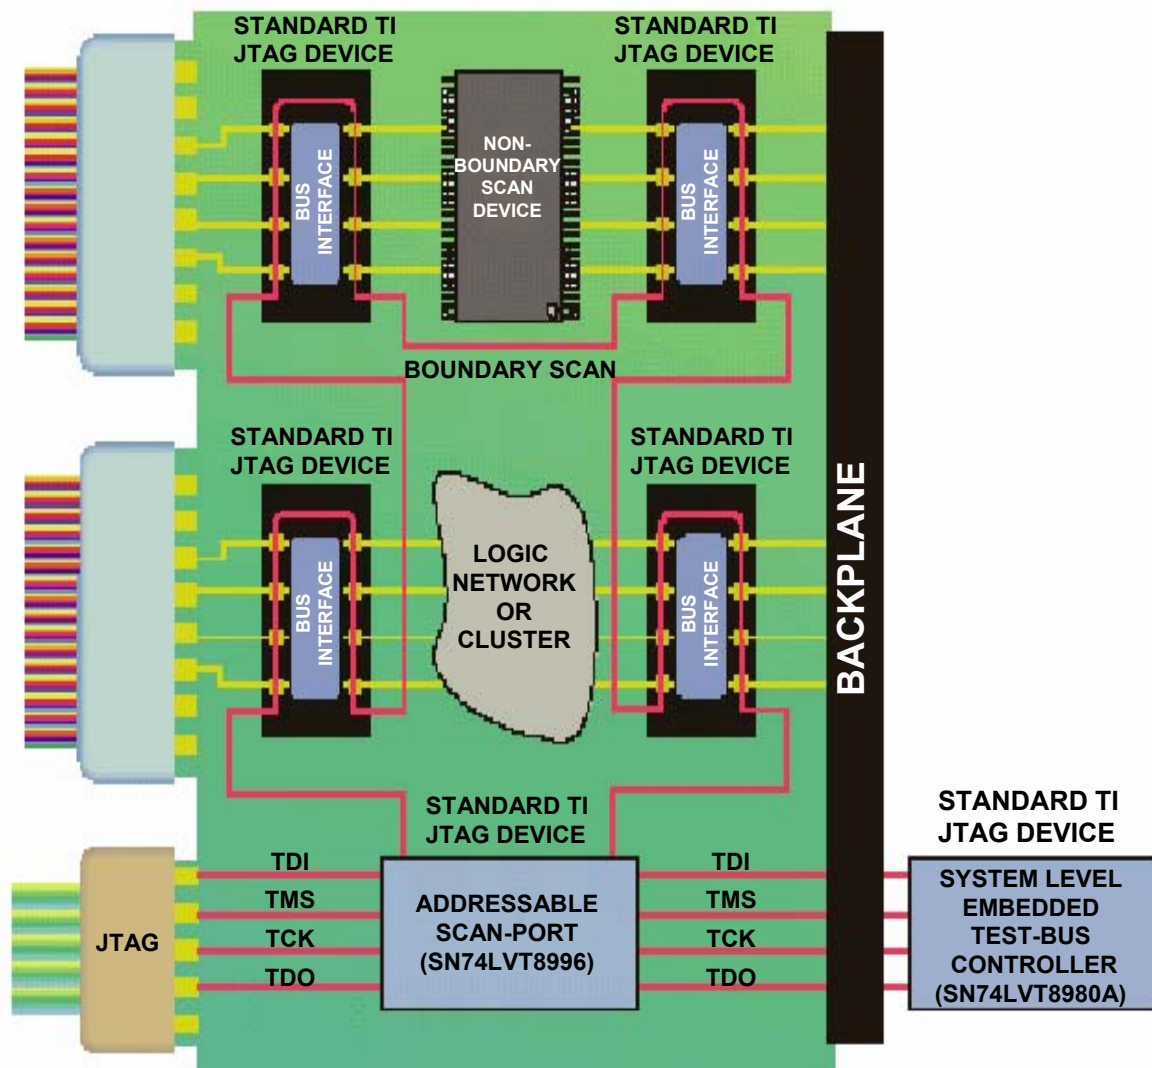

Current TI JTAG Product Offering

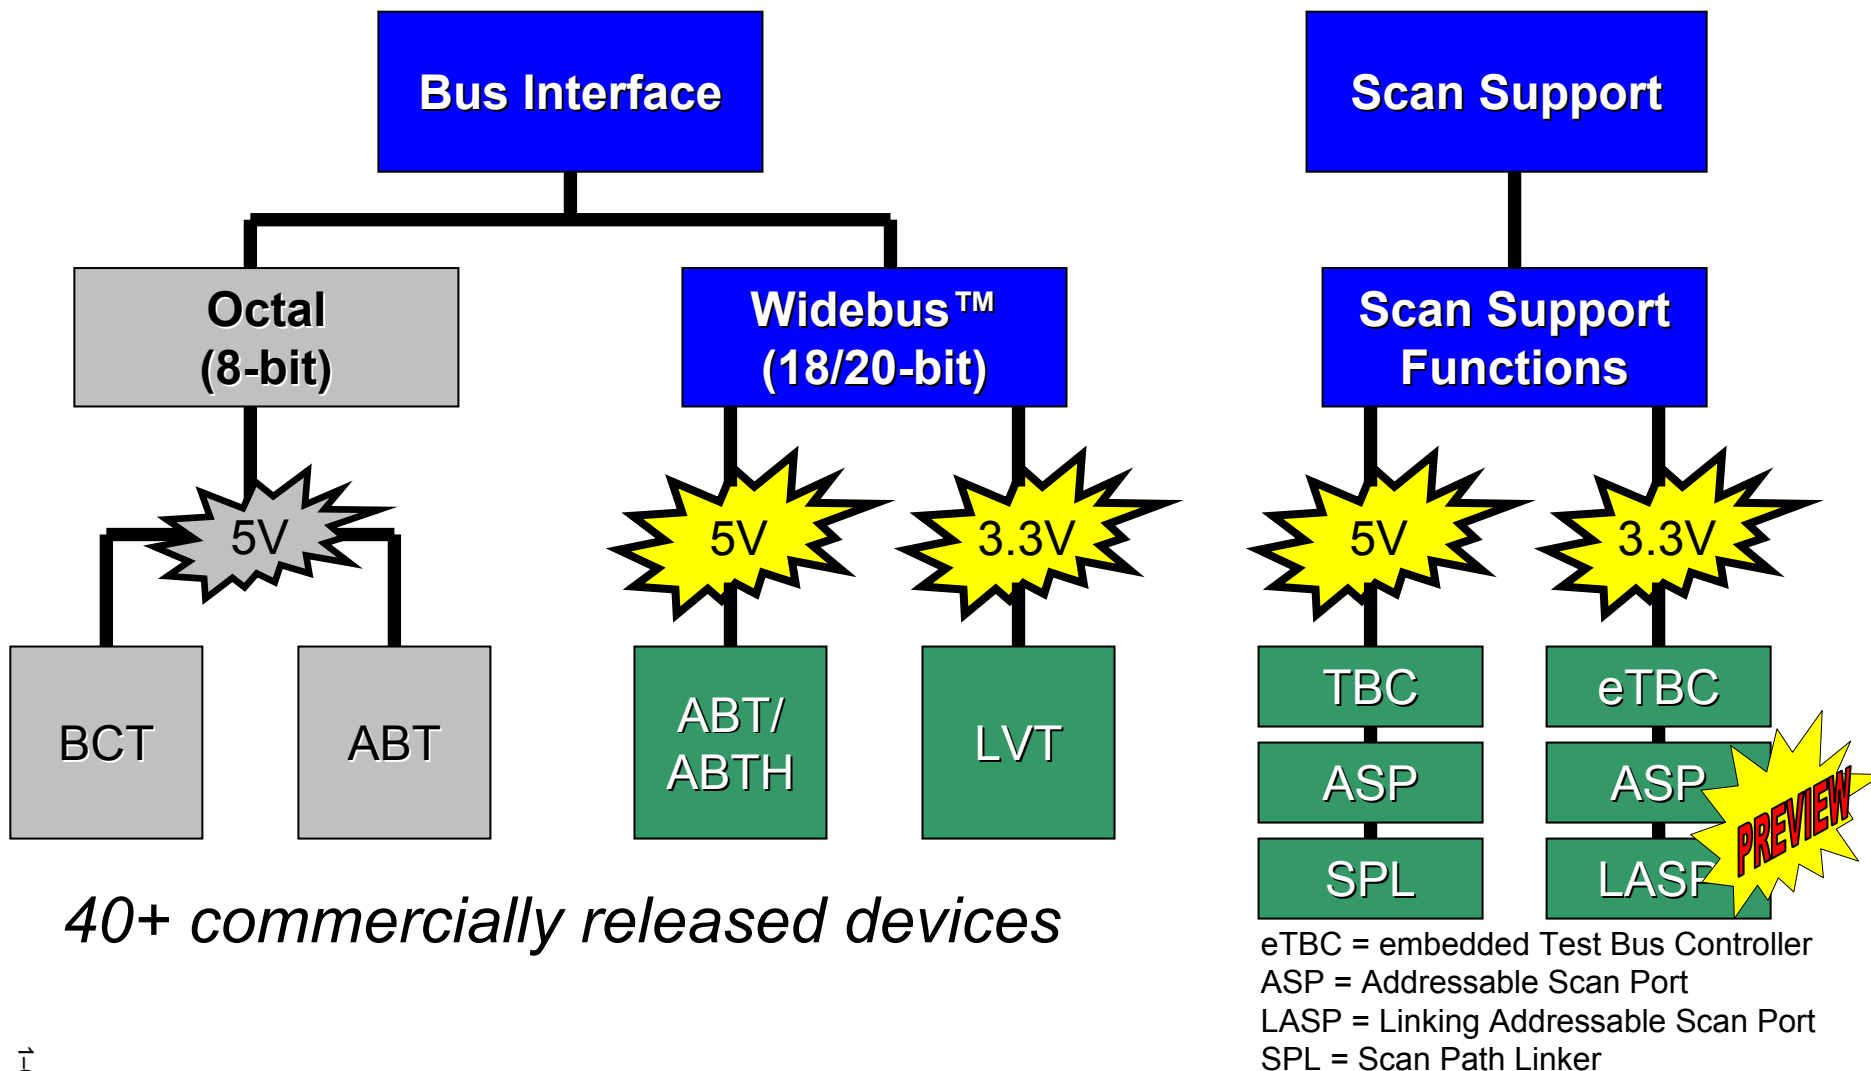


Typical System-Level Application

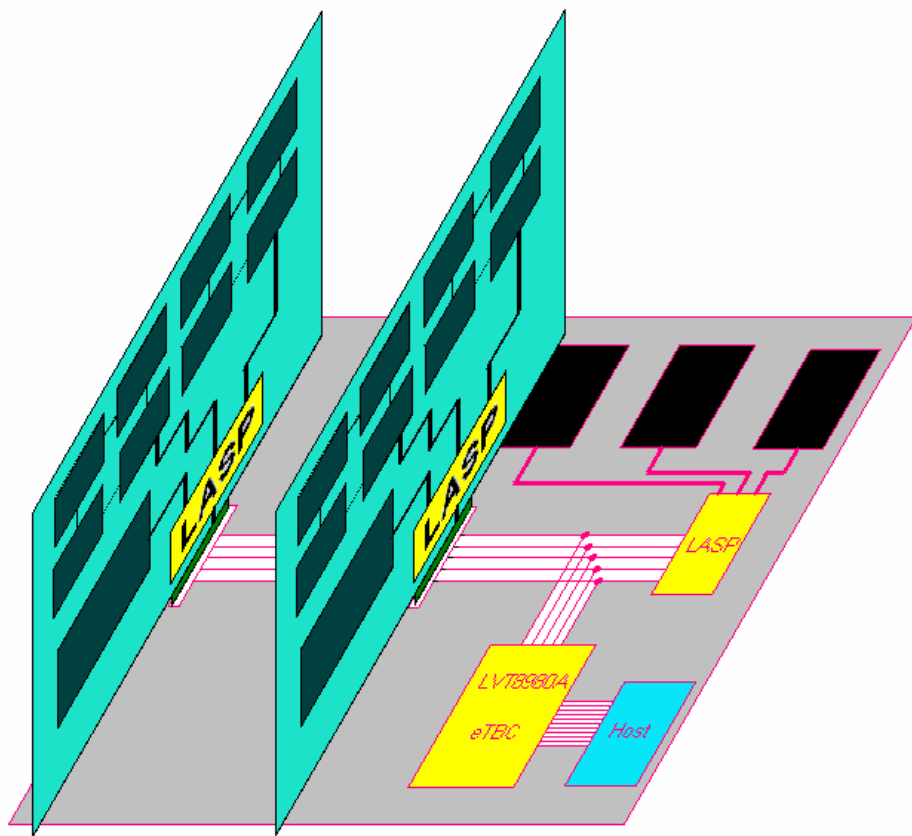

Active Backplane Multi-Drop Architectures

- eTBC converts parallel microprocessor instructions into serial JTAG commands through TMS and TCK
- eTBC addresses the correct target scan chain via LASP's
- LASP or ASP buffers/drives the JTAG scan commands into IEEE1149.1 compliant devices

Typical System-Level Application (Cont.)

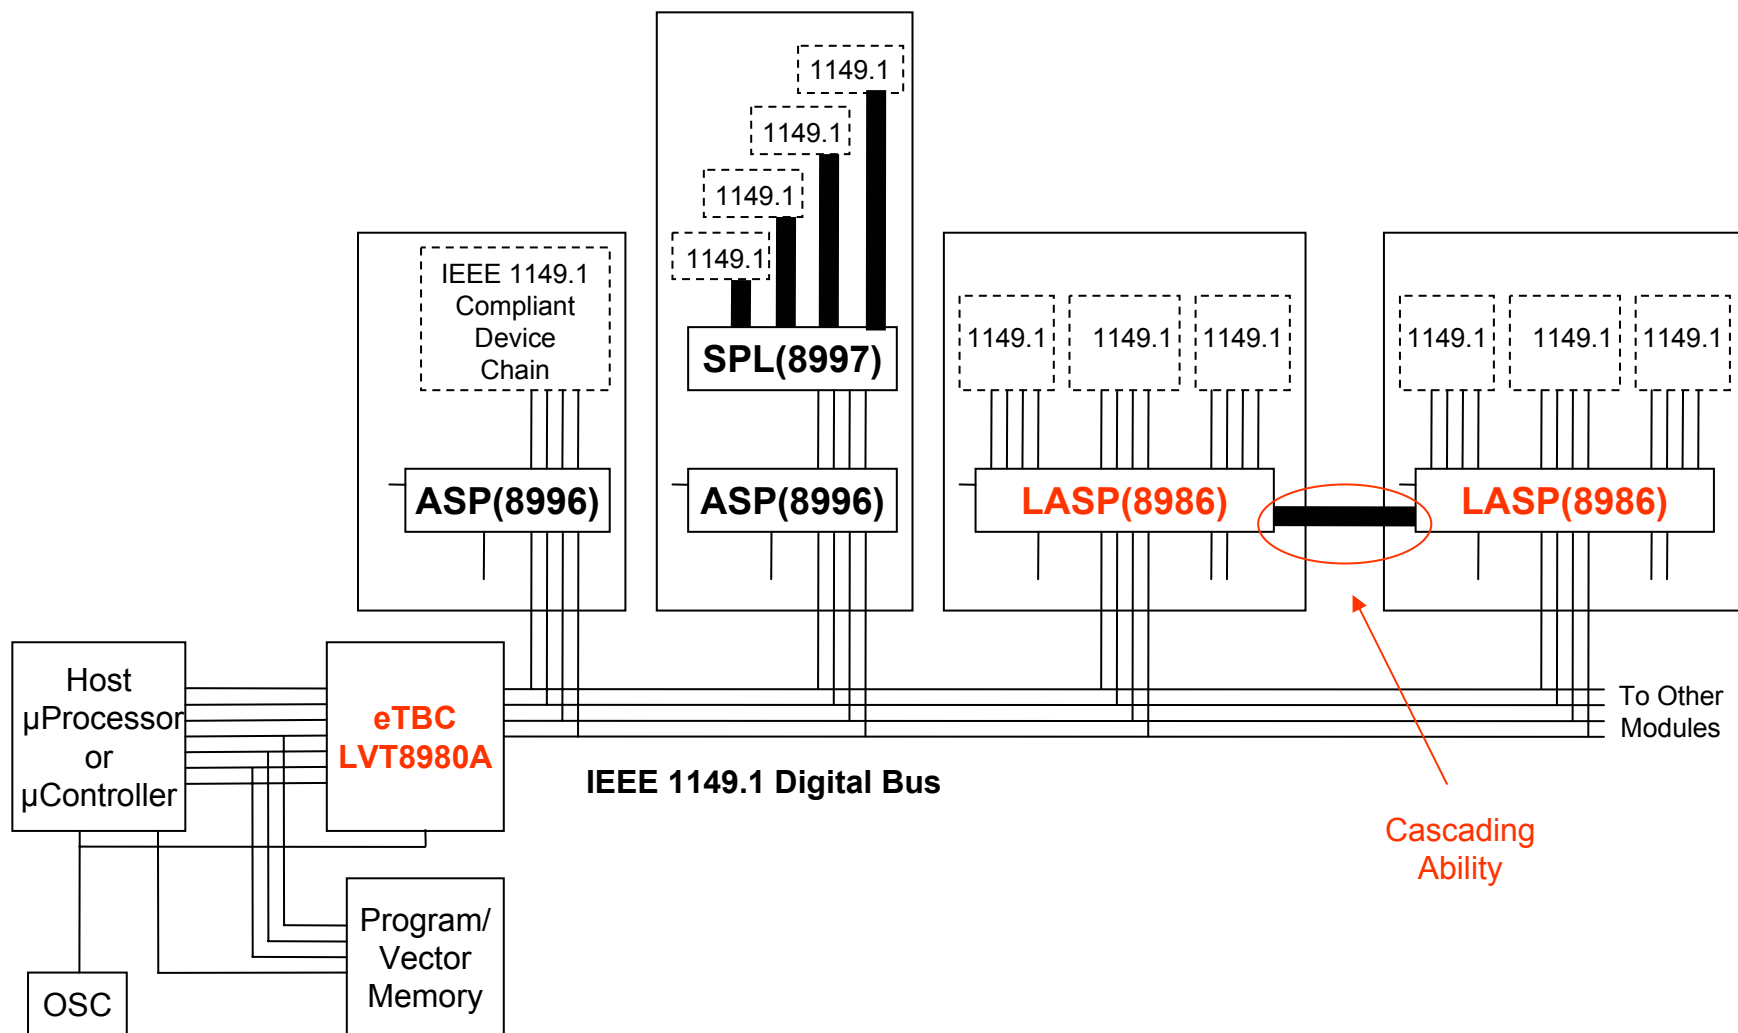

Typical JTAG Applications

Applications

- Manufacturing Board Level Test
 - Complex board assemblies (i.e. BGA packages)
- Manufacturing System Level Test
 - Fault Isolation rather than pass/fail
- Embedded System Level Test
 - Field testing or re-programming
- In System Programming(ISP)
 - Flash or PLD programming
- Emulation
 - eTBC (16-bit) used for DSP emulation/debug

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

2

MUST-HAVE PRODUCTS

CONTENTS

What Are Must-Have Products 2-5

List of Must-Have Products 2-6

I²C and Interface 2-7

Translation 2-8

Switches 2-9

Linear: Op-Amps 2-10

Linear: Power Management 2-11

New Product Priorities 2-12



What are Must-Have Products

A select group of products providing a focused priority for our customers

- Easy reference
- Value-added SLL solutions
- Design-In interest in many applications
- Technical assistance available for Design-In
- Available inventory to support immediate demand
- Free Samples available
- New solutions added quarterly

List of Must-Have Products

Switches

- TS5V330 - 5V, 300 MHz Video Switch
- TS3L301 - Gigabit Ethernet LAN Switch
- TS5L100 - Wide Bandwidth LAN Switch
- TS3L110 - 10/100 BaseT LAN Switch
- TS5A3159 - 1Ω SPDT Analog Switch

Translation

- AVCxT245 - Dual Supply Voltage Translator
- AVCA406 - Memory Card Interface Translator
- AUP1T97/98 - Single Supply Configurable Translator

If nothing else, remember these solutions

- Product Focus
- Valued solutions in any system
- Most applications can utilize at least 1 Must-Have
- Samples Available
- Significant Inventory to support demand

Linear

- TL431/2B - 0.5% Tolerance Adjustable Shunt Regulator
- TLVH431/2B - Enhanced version of the TLV431/2B
- LP2981 - 100mA Low Dropout Regulator
- LP2985 - 150mA Low Dropout Regulator
- LMV821/2/4 - 5MHz RRO Op Amp
- LMV931 - 1.8/5V RRIO Op Amp
- LMV981 - 1.8/5V RRIO Op Amp w/ shutdown
- LPV324 - Low Voltage Low Power RRO Op Amp

Interface

- MAX3243 - 3/5V Multi-Channel RS-232 Transceiver
- MAX3221 - 3/5V Single Channel RS-232 Transceiver

I2C Interface

- PCF8574/A - 8-bit I2C Remote I/O Expander
- PCF8575/C - 16-bit I2C Remote I/O Expander
- PCA9306 - Bi-Directional I2C-Bus/SMBus Level-Translator

Planned

- TS3V340 - 3V, 500 MHz Video Switch
- LV4320A - CompactFlash Interface Transceiver

I2C and Interface

PCF8574/A

PCF8575/C

- I²C-bus parallel-port expander
- 8574 (8bit). 8575 (16bit)
- Optimizes the usage of CPU/MCU I/Os
- Smallest package available (QFN), Pb-Free

PCA9306


- I²C-bus SMBus Translator
- Directionless Translator
- Smallest package available (QFN)

MAX3243




- Single Supply 3D/5R RS-232 Transceiver
- Computing and Data Cable interface
- 15KV HBM ESD

MAX3221

- Single Supply 1D/1R RS-232 Transceiver
- Computing and Data Cable interface
- 15KV HBM ESD

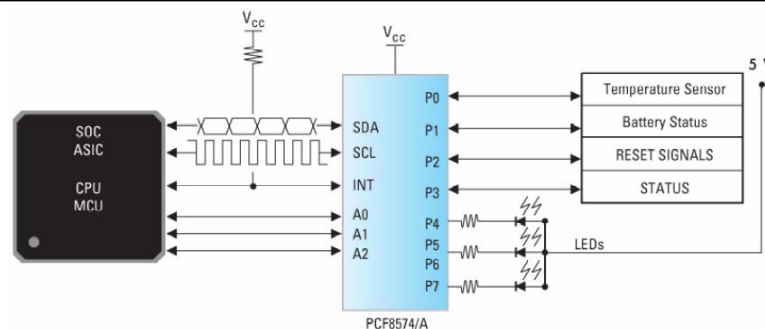

20-Pin QFN

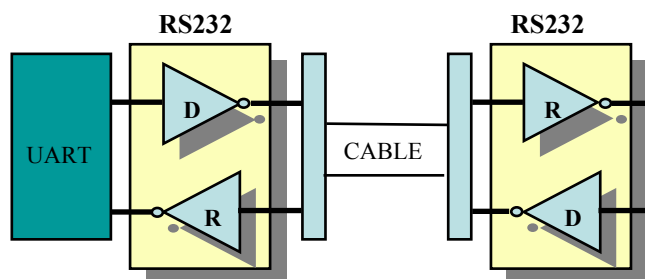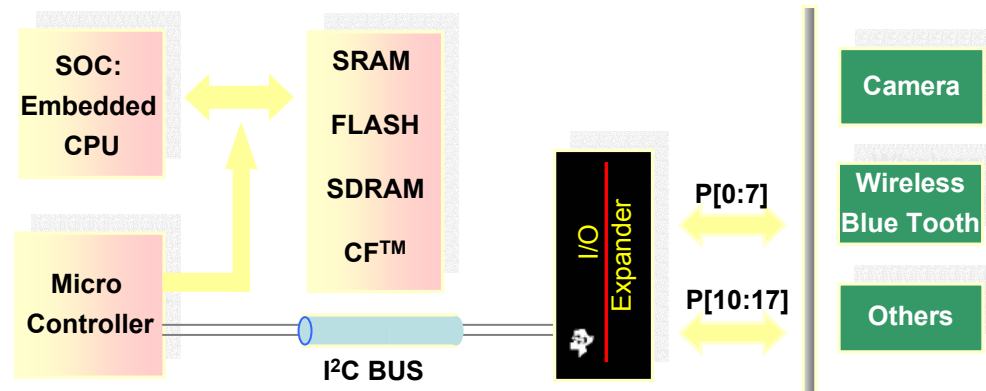


Must-Have Products

Standard Linear & Logic

Translation

AUP1T97/98

- Single Supply Configurable Translator
- 9 functions in 1 device
- Translate voltages 1.8V to 3.3V
- Ultra Low Power for battery operation

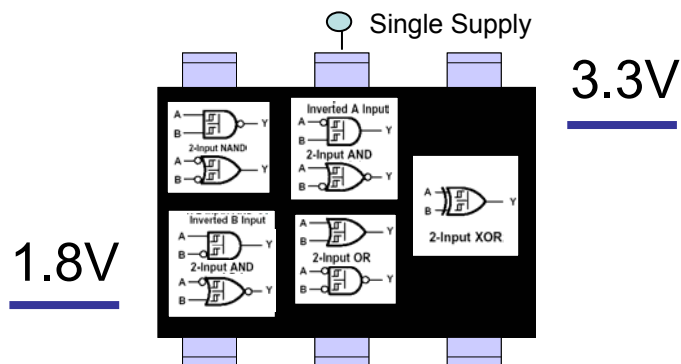


AVCxT45

AVCxT245

- Memory Interface Translator 1.2-3.3V
- 1 and 2bit widths (xT45)
- 8, 16, 20, 24, 32 bit widths (xT245)
- Broadest portfolio of translation solutions

AVCA406

- Memory Interface Translator
- Interfaces MemoryStick™, MMC, SmartMedia, XD PictureCard
- Optimized flexibility between interfaces



LV4320A (planned)

- CompactFlash™ Memory Interface Translator
- Optimized for CompactFlash™
- 8Kv ESD high voltage protection

Must-Have Products

Switches

TS5V330

- 5V Wide Bandwidth Video Switch SPDT
- TV, DVD, STB video switching

TS3V340 (planned)

- 3V Wide Bandwidth Video Switch SPDT
- 500MHz performance video switching, HDTV, DVI
- QFN packaging

TS3L301

- Gigabit Ethernet LAN Switch
- Low Cross Talk
- Computing LAN switching, Hub and Router switch


TS5L100

TS3L110



- 10/100 BaseT Wide Bandwidth LAN Switch
- 5L100 (300MHz). 3L110 (500MHz)
- Replace mechanical relays
- N/B docking stations

TS5A3159

- 1ohm SPDT Analog Switch
- TV, DVD, STB video switching

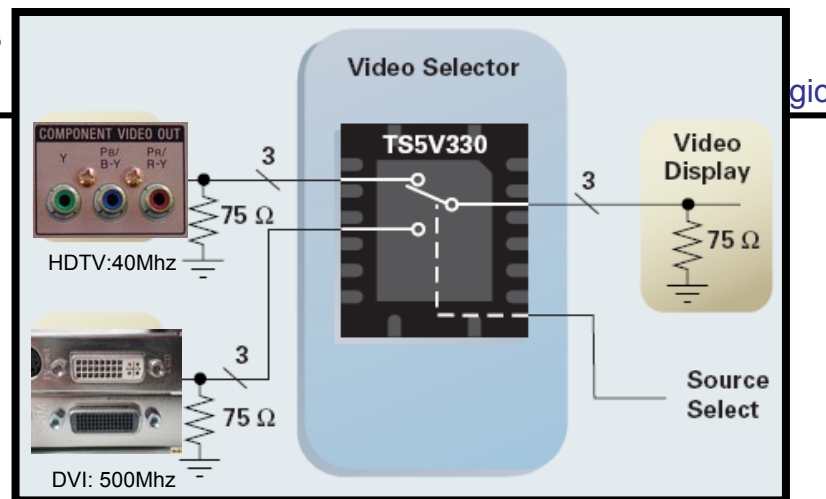

Frontside/Backside Rack Switching Application

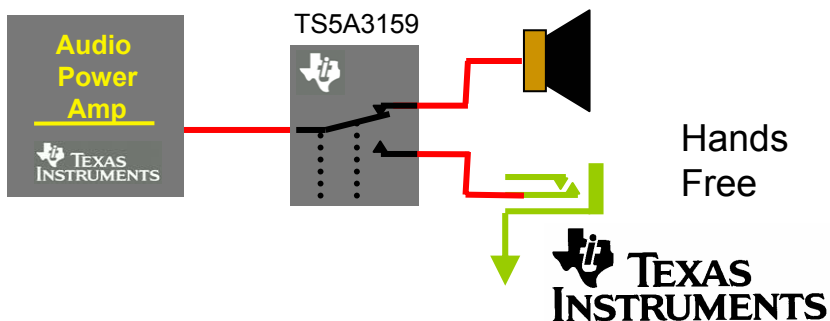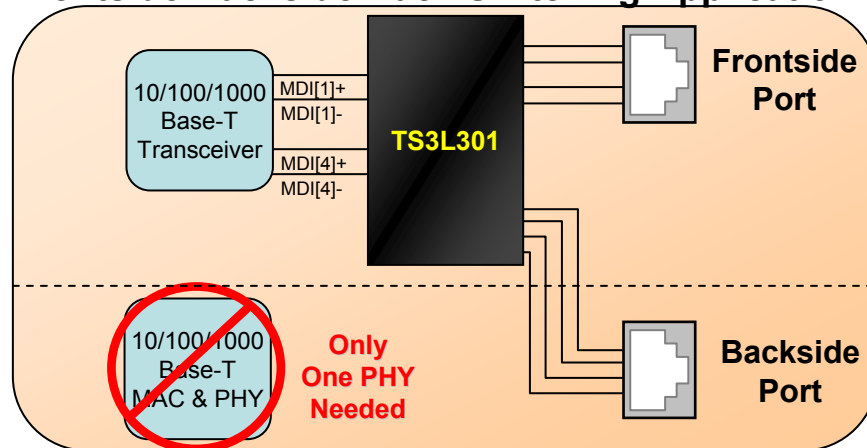

Linear: Op-Amps

LMV981

- 1.8V RRIO 1.4MHz Op Amp with Shutdown
- Low Power Battery operated applications
- Consumer, Handheld, Medical





LMV931

- 1.8V RRIO Op Amp
- Low Power and voltage general purpose applications
- Consumer, Computing


LMV821/822/824

- 5MHz RRO Op Amp
- Low Power Battery operated applications
- Utility and Energy Metering

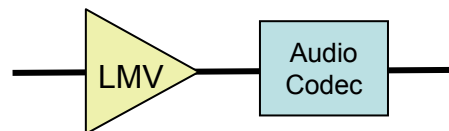



LPV324

- Low Voltage Low Power RRO Op Amp
- General purpose active filters
- Low voltage and portable applications



Low Pass Filter

Microphone Preamp

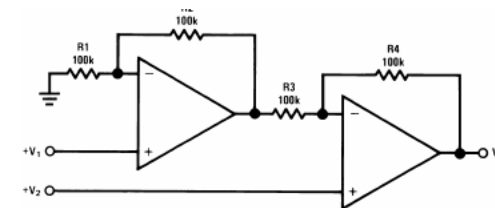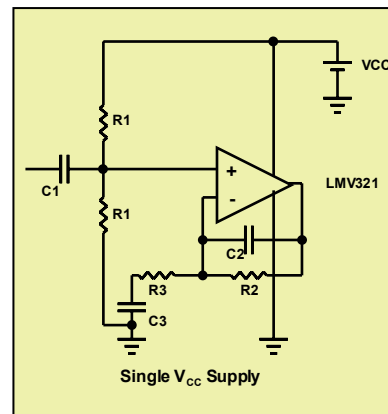

Instrumentation Amp



Linear: Power Management

LP2981

LP2985

- Industry Standard Low Dropout Regulator
- 2981 (100mA). 2985 (150mA)
- Very general application. Consumer, Portable, Computer

TL431B



TL432B

- 0.5% Tolerance Adjustable Shunt Regulator
- Tight initial tolerance
- First in small SC70 package



TLV431B

TLV432B

- 0.5% Tolerance Low Voltage Adjustable Shunt Regulator
- 3 temp ranges, including -40 – 125C
- TLVH31B provides wider V_{ka} 1.24V-18V

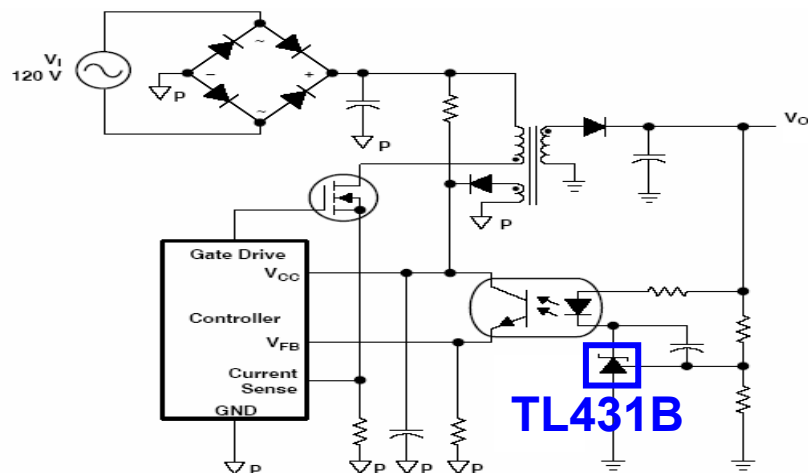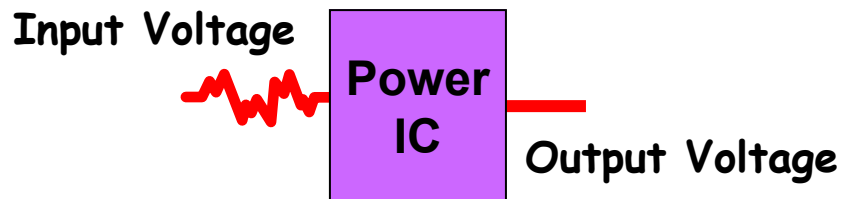

Voltage Reference and Error Amplifier

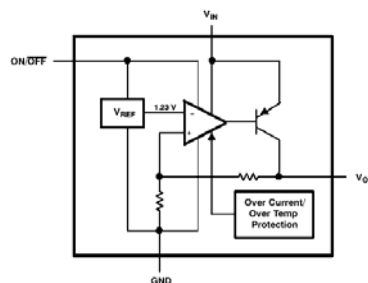

New Product Priorities

2005 SLL Priority
Provide Valued Solutions

Standard Linear & Logic

- Linear – www.ti.com/linear
 - 2nd source industry standard analog solutions.
 - Provide drop-in replacements to leading suppliers – Maxim, National, ADI, LTC
- Signal Switches – www.ti.com/signalswitches
 - New application-specific solutions for analog, video, LAN, DVI
 - Higher performance digital bus switches for computing and telecom
- Translation – www.ti.com/trans
 - Solutions to translate 5.0V–0.8V interfaces.
 - Broadest offering across bit widths 1-bit to 32-bit formats
- I2C – www.ti.com/I2C
 - 2-wire industry standard communication interface
 - Drop-in replacements to Philips PCF/PCA solutions
- Package Development
 - Smallest and most advanced packaging solutions for space savings
 - Pb-Free & Green conversion – www.leadfree.itg.ti.com/

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

3

FUNCTIONAL INDEX

CONTENTS

Buffers, Drivers, and Transceivers	3-5
Inverting Buffers and Drivers	3-5
Noninverting Buffers and Drivers	3-8
Parity Transceivers	3-11
Registered Transceivers	3-12
Standard Transceivers	3-13
Flip-Flops, Latches, and Registers	3-17
D-Type Flip-Flops (3-state)	3-17
D-Type Flip-Flops (non 3-state)	3-18
J-K Flip-Flops	3-19
D-Type Latches (3-state)	3-20
Other Latches	3-21
Shift Registers	3-21
Gates	3-23
AND Gates	3-23
Configurable Gates	3-23
Exclusive-OR Gates	3-24
Exclusive-NOR Gates	3-24
NAND Gates	3-24
NOR Gates	3-26
OR Gates	3-26
I ² C Logic	3-27
I ² C Logic	3-27
Little Logic	3-27
Single Gates	3-27
Dual Gates	3-29
Triple Gates	3-30
MSI Functions	3-31
Arithmetic and Parity Functions	3-31
Adders	3-31
Arithmetic Logic Units	3-31
Parity Generators and Checkers	3-31
Counters	3-32
Binary Counters	3-32
Decade Counters	3-33
Decoders, Encoders, and Multiplexers	3-34
Data Selectors/Multiplexers	3-34
Decoders/Demultiplexers	3-36
Priority Encoders	3-37

CONTENTS (continued)

Digital Comparators	3-37
Identity Comparators	3-37
Magnitude Comparators	3-37
Signal Switches	3-38
Analog Switches and Multiplexers	3-38
Digital Bus Exchange/Multiplexing Switches	3-39
Digital Bus Switches	3-40
Specialty Logic	3-41
Backplane Logic	3-41
Boundary-Scan (JTAG) Logic	3-43
Boundary-Scan (JTAG) Bus Devices	3-43
Boundary-Scan (JTAG) Support Devices	3-44
Bus-Termination Arrays and Networks	3-44
DIMM Memory Drivers and Transceivers	3-45
FIFOs (First-In, First-Out Memories)	3-46
Asynchronous FIFO Memories	3-46
Synchronous FIFO Memories	3-46
IEEE Std 1284 (Parallel Port Interface)	3-48
Miscellaneous Gate and Delay Elements	3-48
Monostable Multivibrators	3-48
Phase-Locked Loops (PLLs) and Oscillators	3-49
PLLs	3-49
Oscillators	3-49
Rate Multipliers and Frequency Dividers/Timers	3-49
Universal Bus Functions	3-50
Universal Bus Drivers (UBDs)	3-50
Universal Bus Exchangers (UBEs)	3-50
Universal Bus Transceivers (UBTs)	3-51
Voltage-Level Translation	3-52
Application Specific [CompactFlash™, SD Cards, MultiMediaCards (MMCs), I ² C]	3-52
Dual-Supply Translators	3-52
ECL/TTL Translators	3-53
GTL/TTL Translators	3-53
Single-Supply Translators	3-53
Translating Bus Switches	3-54

✓ Product available in technology indicated • Product available in reduced-noise advanced CMOS (11000 series) + New product planned in technology indicated
CP = center pin OC = open collector OD = open drain PP = push-pull TP = totem pole 3S = 3-state

BUFFERS, DRIVERS, AND TRANSCEIVERS

Inverting Buffers and Drivers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AUP	BCT	64BCT	CD4K	F	FCT	GTLP	HC	HCT	LS	LV	LVC	LVT	S	TTL			
Single Buffers/Drivers	OD	1G06										✓	✓											✓						
	3S	1G240										✓												✓						
Single Inverters		1G04				✓	✓					✓	✓											✓						
Single Schmitt-Trigger Inverters		1G14				✓	✓					✓	✓											✓						
Unbuffered Single Inverters		1GU04				✓						✓												✓						
Dual Buffers/Drivers	3S	2G06										✓												✓						
		2G240										✓	✓											✓						
Dual Inverters		2G04										✓																		
		2GU04										✓																		
Dual Schmitt-Trigger Inverters		2G14										+												✓						
Triple Buffers/Drivers	OD	3G06										+												✓						
Triple Inverters		3G04										+												✓						
Triple Schmitt-Trigger Inverters		3G14										+												✓						
Unbuffered Triple Inverters		3GU04										+												✓						
Hex Buffers/Drivers	OC	06																				✓	✓				✓			
	OD	06										✓											✓	✓						
	OC	16																								✓				
	3S	366																		✓										
		368																		✓	✓	✓					✓			
	OC	1005						✓																						

BUFFERS, DRIVERS, AND TRANSCEIVERS

Inverting Buffers and Drivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																										
			ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AUP	BCT	64BCT	CD4K	F	FCT	GTLP	HC	HCT	LS	LV	LVC	LVT	S	TTL		
Hex Buffers/Converters		4009														✓													
Hex Buffers/Converters		4049														✓				✓									
Hex Drivers		1004									✓																		
Hex Inverters		04		✓•	✓•	✓	✓	✓	✓		✓	✓					✓			✓	✓	✓	✓	✓		✓	✓		
	CP	11004		✓	✓																								
	OC	05						✓													✓				✓				
	OD	05		✓	✓	✓													✓			✓							
		4069														✓													
Hex Schmitt-Trigger Buffers/Drivers		40106														✓													
Hex Schmitt-Trigger Inverters		14		✓	✓	✓	✓		✓			✓							✓	✓	✓	✓	✓				✓		
		19																			✓								
Strobed Hex Inverters/Buffers	3S	4502														✓													
Unbuffered Hex Inverters		U04				✓													✓			✓	✓						
Octal Buffers/Drivers	3S	240	✓	✓•	✓•	✓	✓	✓			✓	✓		✓			✓			✓	✓	✓	✓	✓	✓	✓			
		11240		✓	✓																								
		1244						✓																					
		540	✓	✓	✓	✓	✓	✓						✓				✓		✓	✓	✓	✓	✓	✓				
	OC	756									✓			✓															
Octal Buffers/Drivers with Input Pullup Resistors	3S	746						✓																					

Inverting Buffers and Drivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AUP	BCT	64BCT	CD4K	F	FCT	GTLP	HC	HCT	LS	LV	LVC	LVT	S	TTL			
Octal Buffers and Line/MOS Drivers with Series Damping Resistors	3S	2240	✓					✓						✓				✓												
Oscillator Drivers for Crystal Oscillator or Ceramic Resonator		1404																					✓							
10-Bit Buffers/Drivers	3S	828																					✓							
		29828						✓																						
11-Bit Line/Memory Drivers	3S	5401	✓																											
12-Bit Line/Memory Drivers	3S	5403	✓																											
16-Bit Buffers/Drivers	3S	16240	✓		✓	✓	✓		✓	✓		✓						✓					✓	✓						
		16540	✓			✓	✓																✓							
16-Bit Buffers/Drivers with Series Damping Resistors	3S	162240																✓						✓						
		162244																						✓						
32-Bit	3S	32240																					✓	✓						
GTLP-to-LVTTL 1-to-6 Fanout Drivers	3S	817																	✓											

BUFFERS, DRIVERS, AND TRANSCEIVERS

Noninverting Buffers and Drivers

Description	Output	Type	Technology																												
			ABT	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AUP	AVC	BCT	64BCT	CD4K	F	FCT	HC	HCT	LS	LV-A	LV-AT	LVC	LVT	S	TTL		
Single Buffers		1G34																									✓				
Single Bus Buffers	OD	1G07											✓	✓													✓				
		1G17											✓	✓													✓				
	3S	1G125				✓	✓						✓														✓				
		1G126				✓	✓						✓														✓				
Dual		2G07											✓														✓				
Dual Bus Buffers	OD	2G17											+														✓				
		2G34											✓														✓				
	3S	2G125											✓														✓				
		2G126											✓														✓				
		2G241											✓														✓				
Triple Bus Buffers	OD	3G07											+														✓				
		3G17											+														✓				
		3G34											+														✓				
Quad Bus Buffers	3S	125	✓			✓	✓			✓			✓			✓	✓		✓		✓	✓	✓	✓		✓	✓				
		126	✓			✓	✓			✓			✓			✓	✓		✓		✓	✓	✓	✓		✓	✓				
Hex Buffers		34											✓																		
	OC	1035							✓																						
	3S	4503																✓													
Hex Buffers/ Converters		4010																✓													
		4050																✓		✓											
Hex Buffers/ Line Drivers	3S	365																		✓	✓	✓									
		367				✓	✓													✓	✓	✓	✓							✓	
	OC	07																				✓	✓							✓	
	OD	07											✓													✓					
	OC	17																													✓
		35								✓																					
Hex Schmitt-Trigger Buffers		17											✓																		

BUFFERS, DRIVERS, AND TRANSCEIVERS

Noninverting Buffers and Drivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AUP	AVC	BCT	64BCT	CD4K	F	FCT	HC	HCT	LS	LV-A	LV-AT	LVC	LVT	S	TTL	
12-Bit Line/Memory Drivers	3S	5402	✓																											
16 Bit	3S	16241	✓																								✓			
		16244	✓	✓	✓	✓	✓	✓		✓	✓		✓		✓					✓						✓	✓			
		16541	✓		✓	✓	✓																			✓	✓			
16 Bit with Series Damping Resistors	3S	162244	✓							✓	✓									✓						✓	✓			
18 Bit	3S	16825	✓		✓						✓																			
18 Bit with Series Damping Resistors	3S	162825	✓																											
20 Bit	3S	16827	✓		✓						✓	✓								✓										
20 Bit with Series Damping Resistors	3S	162827	✓								✓	✓																		
20 Bit with Balanced Drive and Series Damping Resistors	3S	162827																		✓										
1-Bit to 2-Bit Address Drivers	3S	162830									✓																			
1-Bit to 4-Bit Address Drivers	3S	16344									✓																			
		162344									✓																			
1-to-4 Address Registers/Drivers	3S	16831									✓																			
		16832									✓																			
32 Bit	3S	32244									✓	✓		✓		✓										✓	✓			

Noninverting Buffers and Drivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AUP	AVC	BCT	64BCT	CD4K	F	FCT	HC	HCT	LS	LV-A	LV-AT	LVC	LVT	S	TTL	
32 Bit with Series Resistors	3S	322244												✓																
4-Segment Liquid Crystal Display Drivers		4054															✓													

Parity Transceivers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY			
			ABT	ACT	ALS	F
Octal with Parity Generators/Checkers	3S	657	✓			✓
8 Bit to 9 Bit		833	✓			
		29833			✓	
		853	✓			
		29854			✓	
Dual 8 Bit to 9 Bit		16833	✓			
		16853	✓			
16 Bit with Parity Generators/Checkers	3S	16657	✓	✓		

BUFFERS, DRIVERS, AND TRANSCEIVERS

Registered Transceivers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY														
			ABT	AC	ACT	ALS	ALVC	AS	AVC	BCT	F	FCT	HC	HCT	LS	LVC	LVT
Octal	3S	52										✓					
		543	✓		•					✓	✓	✓				✓	✓
		11543			✓												
		561				✓											
		646	✓	✓	✓							✓	✓	✓	✓	✓	✓
		648				✓		✓							✓		
		651	✓														
		652	✓	✓	✓							✓	✓	✓	✓	✓	✓
		11652		✓	✓												
	OC/3S	653				✓											
		654				✓											
Octal with Series Damping Resistors	3S	2543										✓					
		2646										✓					
		2652										✓					
		2952	✓									✓				✓	✓
16 Bit	3S	16470	✓														
		16543	✓		✓		✓					✓				✓	✓
		162543										✓					
		16646	✓		✓		✓		✓			✓				✓	✓
		162646										✓					
		16651			✓												
		16652	✓	✓	✓							✓				✓	✓
		162652										✓					
		16952	✓		✓		✓					✓				✓	✓
		162952										✓					
18 Bit	3S	16524					✓										
		16525					✓										
		162525					✓										
32 Bit	3S	32543	✓														
4 to 1 Multiplexed/Demultiplexed	3S	162460	✓														

Standard Transceivers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																									
			ABT	ABTE	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	64BCT	F	FCT	GTL	GTLP	HC	HCT	LS	LV-A	LV-AT	LVC	LVT
Dual 1 Bit LVTTL to GTLP Adjustable Edge Rate with Split LVTTL Port, Feedback Path, and Selectable Polarity	3S	1395																			✓							
2 Bit LVTTL to GTLP Adjustable Edge Rate with Selectable Parity	3S	1394																			✓							
Quad	3S	243								✓												✓	✓	✓				
Quad Tridirectional	3S	442																						✓				
8-Bit Transceivers and Transparent D-Type Latches with Four Independent Buffers		16973									✓																	
8 Bit LVTTL to GTLP	3S	306																			✓							

BUFFERS, DRIVERS, AND TRANSCEIVERS

Standard Transceivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	ABTE	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	64BCT	F	FCT	GTL	GTLP	HC	HCT	LS	LV-A	LV-AT	LVC	LVT		
Octal	3S	245	✓		✓ .	✓ .	✓	✓			✓	✓		✓	✓		✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	
		1245								✓																				
		11245			✓	✓																								
		620	✓								✓																			
	OC	621									✓																			
	3S	623	✓		✓	✓					✓						✓		✓	✓			✓	✓	✓					
		638									✓			✓									✓	✓	✓					
		639									✓																			
		640	✓								✓			✓			✓						✓	✓	✓					
		1640									✓																			
	OC	641									✓			✓											✓					
		642									✓														✓					
	3S	645									✓			✓									✓	✓	✓					
		1645									✓																			
Octal with Series Damping Resistors	3S	2245	✓															✓	✓								✓	✓		
Octal Transceivers and Line/MOS Drivers with B-Port Series Damping Resistors	3S	2245	✓														✓													
Octal with Adjustable Output Voltage	3S	3245																									✓			

Standard Transceivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																											
			ABT	ABTE	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	64BCT	F	FCT	GTL	GTLP	HC	HCT	LS	LV-A	LV-AT	LVC	LVT		
Octal Dual Supply with Configurable Output Voltage	3S	4245																									✓			
Octal with 3.3-V to 5-V Shifters	3S	4245																									✓			
9 Bit	3S	863	✓																								✓			
		29863								✓						✓														
		29864														✓														
10 Bit	3S	861	✓																							✓				
11 Bit Incident Wave Switching	3S/OC	16246		✓																										
16 Bit	3S	16245	✓		✓	✓		✓	✓		✓	✓		✓	✓			✓									✓	✓		
		16623	✓			✓																								
		16640	✓																											
16-Bit Bus Transceivers and Transparent D-Type Latches with Eight Independent Buffers	3S	32973									✓																			
16 Bit Incident Wave Switching	3S	16245		✓																							✓			
16 Bit with Series Damping Resistors	3S	16245									✓	✓																		
16 Bit with Series Damping Resistors	3S	162245	✓									✓							✓								✓	✓		

BUFFERS, DRIVERS, AND TRANSCEIVERS

Standard Transceivers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																					
			ABT	ABTE	AC	ACT	AHC	AHCT	ALB	ALS	ALVC	ALVT	AS	AUC	AVC	BCD	64BCD	F	FCT	GTL	GTLP	HC	HCT	LS
16 Bit 3.3 V to 5 V Level Shifting	3S	164245									✓				✓									
16 Bit LVTTTL to GTLP Adjustable Edge Rate	3S	1645								✓											✓			
16 Bit LVTTTL to GTLP	3S	16945																			✓			
18 Bit Bus Interface	3S	16863	✓			✓					✓													
18 Bit LVTTTL to GTL/GTL+		16622																		✓				
		16923																		✓				
18 Bit LVTTTL to GTLP Source Synchronous Clock Outputs	3S	1627																			✓			
		16927																			✓			
20 Bit	3S	16861				✓																		
25 Ω Octal	3S	25245	✓													✓	✓							
	OC	25642														✓								
32 Bit	3S	32245	✓								✓			✓										✓
32 Bit LVTTTL to GTLP	3S	32945																			✓			
32 Bit LVTTTL to GTLP Adjustable Edge Rate	3S	3245																			✓			

FLIP-FLOPS, LATCHES, AND REGISTERS

D-Type Flip-Flops (3-state)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																				
			ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	F	FCT	HC	HCT	LS	LV	LVC	LVT	S
Single Latch	3S	1G373																			✓		
Dual 4 Bit Edge Triggered	3S	874						✓			✓												
		876						✓			✓												
Quad	3S	173														✓	✓	✓					
Octal Bus Interface	3S	825									✓					✓							
		29825											✓										
Octal Edge Triggered	3S	374	✓	✓	✓•	✓	✓	✓	✓		✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	3S/CP	11374			✓																		
	3S	574	✓	✓	✓	✓	✓	✓			✓			✓	✓	✓	✓	✓		✓	✓	✓	
		575							✓			✓											
		576							✓			✓											
		577							✓														
Octal Edge Triggered Dual Rank	3S	4374									✓												
Octal Edge Triggered with Series Damping Resistors	3S	2374													✓								
		2574													✓								
Octal Inverting	3S	534	✓	✓	✓			✓								✓	✓						
		564		✓	✓			✓							✓	✓	✓						
9 Bit Bus Interface	3S	823	✓								✓					✓					✓		
		29823						✓															
10 Bit Bus Interface	3S	821	✓								✓										✓		
		29821						✓						✓									
10 Bit with Dual Outputs	3S	16820							✓														
		162820							✓														
16 Bit Edge Triggered	3S	16374	✓	✓	✓	✓	✓		✓	✓		✓	✓			✓					✓	✓	
		162374							✓							✓						✓	
		163374																				✓	
18 Bit	3S	16823	✓		✓				✓							✓							
		162823	✓													+							

FLIP-FLOPS, LATCHES, AND REGISTERS

D-Type Flip-Flops (3-state) (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																				
			ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	F	FCT	HC	HCT	LS	LV	LVC	LVT	S
20 Bit	3S	16721							✓														
		162721							✓														
		16722										✓											
		16821	✓						✓	✓			+										
32 Bit Edge Triggered	3S	32374							✓	✓		✓	✓								✓	✓	
		322374																				✓	

D-Type Flip-Flops (non 3-state)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																			
			ABT	AC	ACT	AHC	AHCT	ALS	AS	AUC	AUP	CD4K	F	FCT	HC	HCT	LS	LV	LVC	LVT	S	TTL
Single Edge Triggered		1G79								✓	✓								✓			
		1G80								✓	✓								✓			
Single Edge Triggered with Preset and Clear		1G74								✓									✓			
		2G74								+												
Dual		4013										✓										
		74		✓•	✓•	✓	✓	✓	✓	✓			✓		✓	✓	✓	✓	✓		✓	
	CP	11074		✓	✓																	
Dual Edge Triggered		2G79								✓									✓			
		2G80								✓									✓			
Quad	CP	175		✓•	✓			✓	✓				✓		✓	✓	✓	✓			✓	✓
		11175		✓																		
		40175										✓										
Hex		174		✓	✓	✓	✓	✓	✓				✓		✓	✓	✓	✓			✓	
		40174										✓										
Hex with Enable		378															✓					
Octal		273	✓	✓	✓	✓	✓	✓						✓	✓	✓	✓	✓		✓		
Octal with Enable		377	✓										✓	✓	✓	✓	✓					

J-K Flip-Flops

DESCRIPTION	TYPE	TECHNOLOGY											
		AC	ACT	ALS	AS	CD4K	F	HC	HCT	LS	LVC	S	TTL
Dual Edge Triggered J-K Master-Slave	4027					✓							
Dual Edge Triggered J-K with Reset	73							✓	✓	✓			
	107							✓	✓	✓			✓
Dual Edge Triggered J-K with Set and Reset	112	✓	✓	✓			✓	✓	✓	✓	✓	✓	
Dual Positive Edge Triggered J-K with Set and Reset	109	✓	✓	✓	✓		✓	✓	✓	✓			
Quad Edge Triggered J-K	276												✓

FLIP-FLOPS, LATCHES, AND REGISTERS

D-Type Latches (3-state)

DESCRIPTION	TYPE	TECHNOLOGY																					
		ABT	AC	ACT	AHC	AHCT	ALS	ALVC	ALVT	AS	AUC	AVC	BCT	F	FCT	HC	HCT	LS	LV-A	LV-AT	LVC	LVT	S
Dual 4 Bit	873						✓			✓													
Octal Inverting Transparent	533	✓	✓	✓			✓			✓						✓	✓						
	563		✓	✓			✓									✓	✓						
Octal Transparent	373	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓		✓	✓	✓	✓		✓	✓	✓
	11373			✓																			
	573	✓	✓	✓	✓	✓	✓			✓			✓	✓	✓	✓	✓		✓	✓	✓	✓	
	580						✓												✓	✓	✓	✓	
	845						✓																
Octal Transparent Read Back	666						✓																
	667						✓																
Octal Transparent with Series Damping Resistors	2373													✓	✓								
	2573														✓								
9 Bit Transparent	843	✓					✓								✓								
	29843												✓										
9 Bit Transparent Read Back	992						✓																
10 Bit Transparent	841	✓					✓			✓					✓						✓		
12 Bit to 24 Bit Multiplexed	16260	✓						✓															
12 Bit to 24 Bit Multiplexed with Series Damping Resistors	162260	✓						✓															
16 Bit Transparent	16373	✓	✓	✓	✓	✓		✓	✓		✓	✓			✓						✓	✓	
	162373							✓							✓							✓	
18 Bit Transparent	16843	✓																					
20 Bit Transparent	16841	✓		✓				✓							✓								
	162841	✓						✓							✓								
32 Bit Transparent	32373								✓			✓									✓	✓	

Other Latches

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY				
			ALS	CD4K	HC	HCT	LS
Dual 2 Bit Bistable Transparent		75			✓	✓	
Dual 4 Bit with Strobe	3S	4508		✓			
4 Bit Bistable		75					✓
		375					✓
Quad Clocked D		4042		✓			
Quad NAND R-S	3S	4044		✓			
Quad NOR R-S	3S	4043		✓			
Quad S-R		279					✓
8 Bit Addressable		259	✓		✓	✓	✓
		4099		✓			
		4724		✓			
8 Bit D-Type Transparent Read Back		990	✓				
8 Bit Edge Triggered Read Back		996	✓				
10 Bit D-Type Transparent Read Back		994	✓				

Shift Registers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY													
			AC	ACT	AHC	AHCT	ALS	ALVC	AS	CD4K	F	FCT	HC	HCT	LS	LV
1-Bit to 4-Bit Address Registers/Drivers	3S	162831						✓								
		162832						✓								
4 Bit Bidirectional Universal Shift		194							✓				✓	✓	✓	
		195											✓			
		40194								✓						
4 Bit D-Type		4076								✓						
4 Stage Parallel-In/Parallel-Out Shift		4035								✓						
Dual 4 Stage Static Shift		4015								✓			✓			
4-by-4 Register Files	OC	170													✓	
	3S	670											✓	✓	✓	
Dual 16-by-4 Register Files	3S	870					✓									
5 Bit Shift		96													✓	
8 Bit Diagnostic Scan	3S	818										✓				

FLIP-FLOPS, LATCHES, AND REGISTERS

Shift Registers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY													
			AC	ACT	AHC	AHCT	ALS	ALVC	AS	CD4K	F	FCT	HC	HCT	LS	LV
8 Bit Multilevel Pipeline	3S	520										✓				
8 Bit Serial In, Parallel Out Shift		164	✓	✓			✓						✓	✓	✓	✓
8 Bit Parallel In, Serial Out Shift with Gated Clock		165					✓						✓	✓	✓	✓
8 Bit Parallel In, Serial In, Serial Out Shift		166					✓						✓	✓	✓	✓
8 Bit Shift with Output Registers	OC	594			✓	✓							✓		✓	✓
		599													✓	
8 Bit Shift with 3-State Output Registers	3S	595			✓	✓							✓		✓	✓
8 Bit Shift with 3-State Output Latches	3S	596													✓	
8 Bit Shift with Input Latches		597											✓	✓	✓	
8 Bit Shift with Input Latches and 3-State Input/Output Ports	3S	598													✓	
8 Bit Universal Shift/Storage	3S	299	✓	✓			✓				✓		✓	✓	✓	
		323	✓				✓								✓	
8 Stage Static Shift		4014								✓						
		4021								✓						
8-Stage Shift-and-Store Bus	3S	4094								✓			✓	✓		
8-Stage Static Bidirectional Parallel-/Serial-Input/Output Bus		4034								✓						
16 Bit Serial In/Out with 16-Bit Parallel-Out Storage		673													✓	
		674													✓	
64 Stage Static Shift		4031								✓						
Dual 64 Stage Static Shift	3S	4517								✓						
Serial-to-Parallel Interface	OC/PP	8153								✓						✓

GATES

AND Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																
			AC	ACT	AHC	AHCT	ALS	ALVC	AS	AUC	AUP	CD4K	F	HC	HCT	LS	LV	LVC	S
Single 2 Input		1G08			✓	✓				✓	✓							✓	
Dual 2 Input		2G08								✓								✓	
Quad 2 Input		08	✓•	✓•	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
	CP	11008	✓	✓															
	OC	09					✓									✓			✓
		4081										✓							
Quad 2-Input Buffers/Drivers		1008							✓										
Quad 2 Input with Schmitt-Trigger Inputs		7001												✓					
Dual 4 Input		21					✓		✓				✓	✓	✓	✓	✓		
		4082										✓							
Triple 3 Input		11	✓•	✓			✓		✓				✓	✓	✓	✓	✓		
		4073										✓							

Configurable Gates

DESCRIPTION	TYPE	TECHNOLOGY		
		CD4K	LS	S
Dual 2 Wide 2 Input	51			✓
	4085	✓		
Dual 2 Wide 2 Input, 2 Wide 3 Input	51		✓	
Expandable 4 Wide 2 Input	4086	✓		
Expandable 8 Input	4048	✓		

Exclusive-OR Gates

[illegible]

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			CD4K	HC	LS
Quad 2 Input	OC	266			✓
	OD	266		✓	
		4077	✓		
		7266		✓	

[illegible]

NAND Gates (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																	
			AC	ACT	AHC	AHCT	ALS	ALVC	AS	AUC	AUP	CD4K	F	HC	HCT	LS	LV	LVC	S	TTL
Dual 2 Input		2G00								✓								✓		
	OD	2G38																✓		
Dual 2 Input with Schmitt-Trigger Inputs		2G132																✓		
Dual 2-Input Buffers/Drivers		40107										✓								
Quad 2 Input		00	✓•	✓•	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	CP	11000	✓	✓																
	OC	03					✓									✓				
	OD	03												✓	✓					
		4011										✓								
	3S	26														✓				
		37					✓									✓			✓	✓
	OC	38					✓						✓			✓			✓	✓
Quad 2-Input Buffers/Drivers		1000							✓											
Quad 2 Input Unbuffered		4011										✓								
Quad 2 Input with Schmitt-Trigger Inputs		132			✓	✓								✓	✓	✓	✓		✓	✓
		4093										✓								
Hex 2-Input Drivers		804					✓		✓											
		1804							✓											
Triple 3 Input		10	✓	✓			✓	✓	✓				✓	✓	✓	✓	✓	✓	✓	✓
		4023										✓								
Dual 4 Input		4012										✓								
		20	✓	✓			✓		✓				✓	✓	✓	✓	✓		✓	
Dual 4-Input Positive 50-Ω Line Drivers		140																	✓	
8 Input		30		•			✓		✓				✓	✓	✓	✓				
	CP	11030		✓																
8 Input AND/NAND		4068										✓								
13 Input		133					✓												✓	

GATES

NOR Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																
			AC	ACT	AHC	AHCT	ALS	AS	AUC	AUP	CD4K	F	HC	HCT	LS	LV	LVC	S	TTL
Single 2 Input		1G02			✓	✓			✓	✓							✓		
Dual 2 Input		2G02							✓								✓		
Quad 2 Input	OC	4001									✓								
		02	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
		33					✓								✓				
Quad 2 Input with Schmitt-Trigger Inputs		7002											✓						
Quad 2 Input Unbuffered		4001									✓								
Hex 2-Input Drivers		805					✓	✓											
		808						✓											
Triple 3 Input		4025									✓								
		27					✓	✓				✓	✓	✓	✓	✓			
Dual 4 Input		4002									✓		✓						
Dual 4 Input with Strobe		25																	✓
Dual 5 Input		260										✓							
8 Input NOR/OR		4078									✓								

OR Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																	
			AC	ACT	AHC	AHCT	ALS	ALVC	AS	AUC	AUP	CD4K	F	HC	HCT	LS	LV	LVC	S	TTL
Single 2 Input		1G32			✓	✓				✓	✓							✓		
Dual 2 Input		2G32								✓								✓		
Quad 2 Input		32	✓•	✓•	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	CP	11032	✓	✓																
		4071										✓								
Quad 2-Input Buffers/Drivers		1032							✓											
Quad 2 Input with Schmitt-Trigger Inputs		7032												✓						
Hex 2-Input Drivers		832					✓		✓											
Dual 4 Input		4072										✓								
Triple 3 Input		4075										✓		✓	✓					

I²C LOGIC

I²C Logic

DESCRIPTION	TYPE	TECHNOLOGY	
		PCA	PCF
Dual Bidirectional I ² C Bus and SMBus Voltage Level Translators	9306	✓	
Nonvolatile 5-Bit Registered Multiplexers with I ² C Interface	8550	✓	
Remote 8-Bit I/O Expanders for I ² C Bus	8574		✓
	8574A		✓
Remote 16-Bit I ² C and SMBus I/O Expanders with Interrupt Output	8575		✓
	8575A		✓

LITTLE LOGIC

Single Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY						
			AHC	AHCT	AUC	AUP	CBT	CBTLV	LVC
Configurable Multiple-Function Gates		1G57			+	✓			✓
		1G58			+	✓			✓
		1G97			+	✓			✓
		1G98			+	✓			✓
		1G99				✓			✓
Single Bilateral Bus Switches (Analog or Digital)		1G66			✓				✓
Single Buffer Gates		1G34							✓
Single Crystal Oscillator Drivers		1GX04							✓
Single Edge-Triggered D-Type Flip-Flops		1G79			✓	✓			✓
		1G80			✓	✓			✓
Single Edge-Triggered Flip-Flops with Preset and Clear		1G74			✓				
Single FET Bus Switches		1G125					✓	✓	
		1G384					✓		
Single FET Bus Switches with Level Shifting		1G125					✓		
		1G384					✓		

LITTLE LOGIC

Single Gates (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY						
			AHC	AHCT	AUC	AUP	CBT	CBTLV	LVC
Single Buffer Gates		1G34				✓			✓
Single Inverters		1GU04	✓		✓				✓
		1G04	✓	✓	✓	✓			✓
Single Inverting Buffers/Drivers	OD	1G06			✓	✓			✓
	3S	1G240			✓				✓
Single Latches	3S	1G373							✓
Single NAND Gates		1G10			+				✓
		1G11			+				✓
		1G27			+				✓
		1G332			+				✓
		1G386			+				✓
Single Noninverting Buffers/Drivers	OD	1G07			✓	✓			✓
Single Noninverting Bus Buffers	3S	1G125	✓	✓	✓				✓
		1G126	✓	✓	✓				✓
Single Noninverting Schmitt-Trigger Buffers/Drivers		1G17			✓	✓			✓
Single-Pole Double-Throw Analog Switches		1G3157							✓
Single Schmitt-Trigger Inverters		1G14	✓	✓	✓	✓			✓
Single 2 Input AND Gates		1G08	✓	✓	✓	✓			✓
Single 2 Input Exclusive-OR Gates		1G86	✓	✓	✓				✓
Single 2 Input NAND Gates	OD	1G00	✓	✓	✓	✓			✓
		1G38							✓
Single 2 Input NOR Gates		1G02	✓	✓	✓	✓			✓
Single 2 Input OR Gates		1G32	✓	✓	✓	✓			✓
Single 3 Input AND-OR Gates		1G0832							✓
Single 3-Input OR-AND Gates		1G3208							✓
1-of-2 Decoders/Demultiplexers		1G19			✓				✓
1-of-2 Noninverting Demultiplexers	3S	1G18			+				✓
2-to-4 Line Decoders		1G139			✓				

Dual Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY	
			AUC	LVC
Single 2- to 1-Line Data Selectors/Multiplexers		2G157	+	✓
Single 2-to-1 NAND Gates		2G257	+	
Single Edge-Triggered D-Type Flip-Flops with Preset and Clear		2G74	+	✓
Dual Analog Multiplexers/Demultiplexers		2G53	✓	✓
Dual Bilateral Bus Switches (Analog or Digital)		2G66	✓	✓
Dual Edge-Triggered D-Type Flip-Flops		2G79	✓	✓
Dual Edge-Triggered D-Type Flip-Flops		2G80	✓	✓
Dual Inverters		2G04	✓	✓
		2GU04	✓	✓
Dual Inverting Buffers/Drivers	3S	2G06	✓	✓
		2G240	+	✓
Dual Noninverting Buffers/Drivers		2G07	✓	✓
		2G34	✓	✓
Dual Noninverting Bus Buffers	OD	2G17	+	✓
	3S	2G125	✓	✓
		2G126	✓	✓
		2G241	✓	✓
Dual Schmitt-Trigger Inverters		2G14	+	✓
Dual 2 Input AND Gates		2G08	+	✓
Dual 2 Input Exclusive-OR Gates		2G86	✓	✓
Dual 2 Input NAND Gates		2G00	✓	✓
	OD	2G38		✓
Dual 2 Input NAND Gates with Schmitt-Trigger Inputs		2G132		✓
Dual 2 Input NOR Gates		2G02	✓	✓
Dual 2 Input OR Gates		2G32	✓	✓

LITTLE LOGIC

Triple Gates

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY	
			AUC	LVC
Triple Inverting Buffers/Drivers	OD	3G06	+	✓
Triple Noninverting Buffers/Drivers	OD	3G07	+	✓
		3G17	+	✓
		3G34	+	✓
		3G04	+	✓
		3G14	+	✓
Triple Schmitt-Trigger Inverters				
Triple Unbuffered Inverters		3GU04	+	✓

MSI FUNCTIONS

ARITHMETIC AND PARITY FUNCTIONS

Adders

DESCRIPTION	TYPE	TECHNOLOGY						
		AC	ACT	F	HC	HCT	LS	S
9 Bit Binary Full with Fast Carry	283	✓	✓	✓	✓	✓	✓	✓

Arithmetic Logic Units

DESCRIPTION	TYPE	TECHNOLOGY		
		AS	LS	S
Arithmetic Logic Units/Function Generators	181	✓	✓	
	381			✓
Look-Ahead Carry Generators	182			✓

Parity Generators and Checkers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY									
			AC	ACT	ALS	AS	F	FCT	HC	HCT	LS	S
Dual 8 Bit Odd		480						✓				
9 Bit Odd/Even		280	✓	✓	✓	✓	✓		✓	✓	✓	✓
9 Bit with Bus-Driver Parity Input/Output Port		286		•		✓						
	CP	11286		✓								

MSI FUNCTIONS

COUNTERS

Binary Counters

DESCRIPTION	TYPE	TECHNOLOGY													
		AC	ACT	ALS	AS	CD4K	F	FCT	HC	HCT	LS	LV	S	TTL	
4 Bit Ripple	93								✓	✓	✓				
	293										✓				
Dual 4 Bit	393								✓	✓	✓	✓		✓	
Dual 4 Bit Up	4520					✓			✓	✓					
Presettable 4 Bit Up/Down	4516					✓									
Presettable 4 Bit BCD Up/Down with Dual Clock and Reset	40193					✓									
Presettable Synchronous 4 Bit Up/Down	191			✓				✓	✓	✓	✓				
	193			✓					✓	✓	✓			✓	
Programmable 4 Bit with Asynchronous Clear	40161					✓									
Synchronous 4 Bit	569			✓											
Synchronous 4 Bit Up/Down	169			✓	✓		✓				✓				
	669										✓				
	697										✓				
Synchronous 4 Bit with Preset and Asynchronous Clear	161	✓	✓	✓	✓		✓		✓	✓	✓	✓			
Synchronous 4 Bit with Preset and Synchronous Clear	163	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓		
8-Bit Counters/Dividers with 1-of-8 Decoded Outputs	4022					✓									
8 Bit with 3-State Output Registers	590								✓		✓				
8 Bit with Input Registers	592										✓				
8 Bit with Input Registers and Parallel Counter Outputs	593										✓				
8 Bit Synchronous Up/Down	867			✓	✓										
	869			✓	✓										
8 Bit Presettable Synchronous Down	40103					✓			✓	✓					
7-Stage Ripple-Carry Counters/Dividers	4024					✓			✓	✓					
12-Stage Ripple-Carry Counters/Dividers	4040					✓			✓	✓		✓			
14-Stage Ripple-Carry Counters/Dividers with Oscillators	4020					✓			✓	✓					
	4060					✓			✓	✓					
21 Stage	4045					✓									

Binary Counters (continued)

DESCRIPTION	TYPE	TECHNOLOGY													
		AC	ACT	ALS	AS	CD4K	F	FCT	HC	HCT	LS	LV	S	TTL	
Divide by 12	92										✓				
Divide by N	4018					✓									
Dual 16 Bit with Output Registers	8154											✓			
Programmable Divide by N	4059					✓			✓						
Presettable Up/Down or BCD Decade	4029					✓									

Decade Counters

DESCRIPTION	TYPE	TECHNOLOGY			
		CD4K	HC	HCT	LS
Divide by 2, Divide by 5	90				✓
Dual Divide by 2, Divide by 5	390		✓	✓	✓
Synchronous Presettable BCD Up/Down	190		✓		
	192		✓		
Counters/Dividers with 1-of-10 Decoded Outputs	4017	✓	✓		
Counters/Drivers with Decoded 7-Segment Display Outputs	4026	✓			
	4033	✓			
BCD-to-Decimal Decoders	4028	✓			
Presettable BCD Up/Down	4510	✓			
Dual BCD Up	4518	✓	✓		
Programmable BCD Divide by N	4522	✓			
2 Decade Synchronous Presettable BCD Down	40102	✓			
Up-Down Counters/Latches/7-Segment Display Drivers	40110	✓			
Presettable BCD-Type Up/Down with Dual Clock and Reset	40192	✓			

MSI FUNCTIONS

DECODERS, ENCODERS, AND MULTIPLEXERS

Data Selectors/Multiplexers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																		
			ABT	AC	ACT	AHC	AHCT	ALS	AS	AUC	CD4K	F	FCT	HC	HCT	LS	LV	LVC	PCA	S	TTL
Single 2-to-1 Line Data Selectors/Multiplexers		2G157								+								✓			
1-of-8 Analog Multiplexers/Demultiplexers		4051															✓				
1-of-8 Analog Multiplexers/Demultiplexers with Logic Level Conversion		4051									✓			✓	✓						
1-of-8 Analog Multiplexers/Demultiplexers with Latches		4351												✓	✓						
1-of-8 Data Selectors	3S	4512									✓										
1-of-8 Data Selectors/Multiplexers		151		✓	✓			✓	✓			✓		✓	✓	✓				✓	
	3S	251		✓				✓				✓		✓	✓	✓					
1-of-8 Data Selectors/Multiplexers/Registers	3S	354												✓	✓						
		356													✓						
1-of-8 Differential Analog Multiplexers/Demultiplexers		4097									✓										
1-of-16 Analog Multiplexers/Demultiplexers		4067									✓			✓	✓						
1-of-16 Data Selectors/Multiplexers		150																			✓
1-of-16 Data Generators/Multiplexers	3S	250							✓												
Dual 1-of-4 Data Selectors/Multiplexers		153		✓	✓			✓	✓			✓		✓	✓	✓					
	3S	253		✓	✓			✓	✓			✓		✓	✓	✓					
Dual Analog Multiplexers/Demultiplexers		2G53								+								✓			
Dual 1-of-4 Analog Multiplexers/Demultiplexers		4052															✓				
Dual 1-of-4 Analog Multiplexers/Demultiplexers with Logic Level Conversion		4052									✓			✓	✓						
Dual 1-of-4 Analog Multiplexers/Demultiplexers with Latches		4352												✓							
Triple 1-of-2 Analog Multiplexers/Demultiplexers		4053															✓				
Triple 1-of-2 Analog Multiplexers/Demultiplexers with Logic Level Conversion		4053									✓			✓	✓						

Data Selectors/Multiplexers (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																		
			ABT	AC	ACT	AHC	AHCT	ALS	AS	AUC	CD4K	F	FCT	HC	HCT	LS	LV	LVC	PCA	S	TTL
Quad 1-of-2 Data Selectors/Multiplexers	3S	257		✓	✓			✓	✓			✓	✓	✓	✓	✓		✓		✓	
		258			✓			✓	✓			✓		✓	✓	✓				✓	
	CP/3S	11257		✓	✓																
Quad 1-of-2 Data Selectors/Multiplexers with Series Damping Resistors	3S	2257											✓								
Quad 2-to-1 Data Selectors/Multiplexers		157		✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓		✓	
	3S	40257									✓										
Quad 2-to-1 Data Selectors/Multiplexers with Storage		298							✓							✓					
		399											✓			✓					
Quad 2-to-4 Data Selectors/Multiplexers		158		✓	✓	✓	✓	✓	✓					✓	✓	✓				✓	
Hex 2-to-1 Universal Multiplexers	3S	857						✓													
4-to-1 Multiplexers/Demultiplexers	3S	16460	✓																		
Nonvolatile 5-Bit Registers with I ² C Interface		8550																	✓		

MSI FUNCTIONS

Decoders/Demultiplexers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY																	
			AC	ACT	AHC	AHCT	ALS	AS	AUC	BCI	CD4K	F	FCT	HC	HCT	LS	LV	LVC	S	TTL
1-of-2 Decoders/Demultiplexers		1G19																✓		
1-of-2 Noninverting Demultiplexers	3S	1G18							+									✓		
2-of-3 Decoders/Demultiplexers		1G29																✓		
Dual 2-to-4 Line Decoders/Demultiplexers		139	✓	✓•	✓	✓	✓							✓	✓	✓	✓	✓	✓	
	CP	11139		✓																
		155														✓				
	OC	156					✓									✓				
Dual 2-Line to 4-Line Memory Decoders with On-Chip Supply-Voltage Monitors		2414								✓										
Dual Binary 1-of-4 Decoders/Demultiplexers		4555									✓									
		4556									✓									
3-to-8 Line Decoders/Demultiplexers		238	✓	✓										✓	✓					
3-to-8 Line Inverting Decoders/Demultiplexers		138	✓•	✓	✓	✓	✓	✓				✓	✓	✓	✓	✓	✓	✓	✓	
	CP	11138	✓																	
3-to-8 Line Decoders/Demultiplexers with Address Latches		137					✓							✓	✓					
		237												✓	✓					
4-Bit Latch/4 to 16 Line		4514									✓			✓	✓					
		4515									✓			✓	✓					
4-to-16 Line Decoders/Demultiplexers		154												✓	✓					✓
	OC	159																		✓
BCD-to-Decimal Decoders/Drivers	OC	45																		✓
		145														✓				✓
BCD to 7-Segment Decoders/Drivers	OC	47														✓				✓
		247														✓				
BCD to 7-Segment Latches/Decoders/Drivers		4511									✓			✓	✓					
BCD to 7-Segment LCD Decoders/Drivers with Display-Frequency Outputs		4055									✓									
BCD to 7-Segment LCD Decoders/Drivers with Strobed Latch Function		4056									✓									
BCD to 7-Segment Latches/Decoders/Drivers for LCDs		4543									✓			✓	✓					
BCD to 10-Line Decimal		42												✓	✓	✓				

Priority Encoders

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY			
			CD4K	HC	HCT	LS
8 to 3 Line		148		✓		✓
	3S	348				✓
		4532	✓			
10 to 4 Line		147		✓	✓	
10 to 4 Line BCD		40147	✓			

DIGITAL COMPARATORS

Identity Comparators

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY	
			ALS	F
8 Bit Identity ($\overline{P} = Q$)		521	✓	✓
8 Bit Identity ($P = Q$) with Input Pullup Resistors	OC	518	✓	
8 Bit Identity ($\overline{P} = \overline{Q}$) with Input Pullup Resistors		520	✓	✓
12 Bit Address		679	✓	

Magnitude Comparators

DESCRIPTION	TYPE	TECHNOLOGY						
		ALS	AS	CD4K	HC	HCT	LS	S
4 Bit	85				✓	✓	✓	✓
	4063			✓				
	4585			✓				
8 Bit	682				✓		✓	
	684				✓		✓	
	688	✓			✓	✓	✓	
	885		✓					

SIGNAL SWITCHES

Analog Switches and Multiplexers

DESCRIPTION	TYPE	TECHNOLOGY						
		AHC	AUC	CD4K	HC	HCT	LV-A	LVC
Single Switches	1G66		✓					✓
Dual Switches	2G66		✓					✓
Dual 4-Channel Multiplexers/Demultiplexers	4052				✓	✓	✓	
Dual 4-Channel Multiplexers/Demultiplexers with Injection-Current Effect Control	4852				✓			
Dual 4-Channel Multiplexers/Demultiplexers with Latches	4352			✓				
Dual 4-Channel Multiplexers/Demultiplexers with Logic-Level Conversion	4052			✓				
Triple 2-Channel Multiplexers/Demultiplexers	4053				✓	✓	✓	
Triple 2-Channel Multiplexers/Demultiplexers with Logic-Level Conversion	4053			✓				
Quadruple Switches	4066	✓		✓	✓		✓	
Quadruple Switches with Level Translation	4316				✓	✓		
8-Channel Multiplexers/Demultiplexers	4051				✓	✓	✓	
	4097			✓				
8-Channel Multiplexers/Demultiplexers with Injection-Current Effect Control	4851				✓			
8-Channel Multiplexers/Demultiplexers with Latches	4651				✓	✓		
8-Channel Multiplexers/Demultiplexers with Logic-Level Conversion	4051			✓				
16-Channel Multiplexers/Demultiplexers	4067				✓	✓	✓	
SPDT Switches	1G3157							✓
SPDT Switches or 2:1 Multiplexers/Demultiplexers	2G53		✓					✓

Digital Bus Exchange/Multiplexing Switches

DESCRIPTION	TYPE	TECHNOLOGY				
		CB3Q	CB3T	CBT	CBT-C	CBTLV
1-of-8 FET Multiplexers/Demultiplexers	3251	✓		✓		✓
Dual 1-of-4 FET Multiplexers/Demultiplexers	3253	✓	✓	✓	✓	✓
4-Bit 1-of-2 FET Multiplexers/Demultiplexers	3257	✓	✓	✓	✓	✓
10-Bit FET Bus-Exchange Switches	3383		✓	✓	✓	✓
12-Bit 1-of-2 FET Multiplexers/Demultiplexers with Internal Pulldown Resistors	16292			✓		✓
	162292			✓		
12-Bit 1-of-2 FET Multiplexers/Demultiplexers with Internal Pulldown Resistors and Series Damping Resistors	16292					✓
12-Bit 1-of-3 FET Multiplexers/Demultiplexers	16214			✓	✓	
Synchronous 16-Bit 1-of-2 FET Multiplexers/Demultiplexers	16232			✓		
16-Bit 1-of-2 FET Multiplexers/Demultiplexers	16233			✓		
16-Bit to 32-Bit FET Multiplexer/Demultiplexer Bus Switches	16390			✓		
18-Bit FET Bus-Exchange Switches	16209			✓		
24-Bit FET Bus-Exchange Switches	16212	+	✓	✓	✓	✓
	16213			✓		
24-Bit FET Bus-Exchange Switches with Schottky Diode Clamping	16212			✓		
	16213			✓		

SIGNAL SWITCHES

Digital Bus Switches

DESCRIPTION	TYPE	TECHNOLOGY											
		AHC	AUC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	HC	HCT	LV	LVC
Single FET	1G125					✓		✓					
	1G384					✓							
Single FET with Level Shifting	1G125					✓							
	1G384					✓							
Dual FET	3305			✓			✓						
	3306			✓	✓	✓	✓						
Dual FET with Level Shifting	3305						✓						
	3306					✓	✓						
Dual FET with Schottky Diode Clamping	3306					✓							
Quad Bilateral	4016								✓	✓			
	4066	✓							✓	✓	✓	✓	
Quad FET	1G125				✓		✓						
	3125			✓	✓	✓	✓	✓					
	3126					✓		✓					
Octal FET	3244			✓		✓	✓						
	3245			✓	✓	✓	✓	✓					
	3345			✓		✓	✓						
Octal 5 V with Precharged Outputs and Undershoot Protection	6845						✓						
10 Bit FET	3384			✓	✓	✓	✓	✓					
	3861					✓		✓					
10 Bit FET with Internal Pulldown Resistors	3857							✓					
10 Bit FET with Level Shifting	3384						✓						
	3861					✓							
10 Bit FET with Precharged Outputs and Diode Clamping	6800					✓							
10 Bit FET with Precharged Outputs and Active Clamp Undershoot Protection	6800			✓		✓	✓						
10 Bit FET with Precharged Outputs for Live Insertion	6800					✓							
10 Bit FET with Schottky Diode Clamping	3384			✓		✓							
16 Bit FET	16244		✓	✓		✓	✓						
	16245			✓		✓	✓						
16 Bit FET with Active Clamp Undershoot Protection	16245					✓							

Digital Bus Switches (continued)

DESCRIPTION	TYPE	TECHNOLOGY											
		AHC	AUC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	HC	HCT	LV	LVC
20 Bit FET	16210			✓	✓	✓	✓	✓					
	16861					✓							
20 Bit FET with Active Clamp Undershoot Protection	16861					✓							
20 Bit FET with Level Shifting	16210					✓							
	16861					✓							
20 Bit FET with Precharged Outputs	16800						✓	✓					
20 Bit FET with Series Damping Resistors	19861					+							
24 Bit FET	16211			✓	✓	✓	✓	✓					
24 Bit FET with Bus Hold	16211					✓							
24 Bit FET with Level Shifting	16211					✓							
24 Bit FET with Precharged Outputs	16811			✓			✓						
24 Bit FET with Schottky Diode Clamping	16211					✓							
32 Bit FET	34X245					✓							
32 Bit FET with Active Clamp Undershoot Protection	32245			✓		✓							

SPECIALTY LOGIC

Backplane Logic

DESCRIPTION	TYPE	TECHNOLOGY				
		ABTE	FB	GTL	GTLP	VME
1:6/1:2 GTLP-to-LVTTL Fanout Drivers	817				✓	
Dual 1-Bit LVTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers with Split LVTTL Port, Feedback Path, and Selectable Polarity	1395				✓	
	21395				✓	
2-Bit LVTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers with Selectable Polarity	1394				✓	
7-Bit TTL/BTL Transceivers (IEEE Std 1194.1)	2041		✓			
8-Bit LVTTL-to-GTLP Adjustable-Edge-Rate Registered Transceivers with Split LVTTL Port and Feedback Path	22033				✓	
	2034				✓	
	22034				✓	
8-Bit LVTTL-to-GTLP Bus Transceivers	306				✓	
8-Bit TTL/BTL Registered Transceivers (IEEE Std 1194.1)	2033		✓		✓	
8-Bit TTL/BTL Transceivers (IEEE Std 1194.1)	2040		✓			

SPECIALTY LOGIC

Backplane Logic (continued)

DESCRIPTION	TYPE	TECHNOLOGY				
		ABTE	FB	GTL	GTLP	VME
8-Bit Universal Bus Transceivers and Two 1-Bit Bus Transceivers with 3-State Outputs	22501					✓
9-Bit TTL/BTL Address/Data Transceivers (IEEE Std 1194.1)	2031		✓			
11-Bit Incident Wave Switching Bus Transceivers with 3-State and Open-Collector Outputs	16246	✓				
16-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers	1645				✓	
16 Bit LVTTTL-to-GTL/GTL+ Universal Bus Transceivers with Live Insertion	1655			✓		
16 Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers	1655				✓	
16-Bit Incident Wave Switching Bus Transceivers with 3-State Outputs	16245	✓				
16-Bit LVTTTL-to-GTLP Bus Transceivers	16945				✓	
17-Bit LVTTTL-to-GTL/GTL+ Universal Bus Transceivers with Buffered Clock Outputs	16616			✓		
17-Bit LVTTTL-to-GTLP Universal Bus Transceivers with Buffered Clock	16916				✓	
17-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers with Buffered Clock	1616				✓	
17-Bit TTL/BTL Universal Storage Transceivers with Buffered Clock Lines (IEEE Std 1194.1)	1651		✓			
17-Bit LVTTTL/BTL Universal Storage Transceivers with Buffered Clock Lines (IEEE Std 1194.1)	1653		✓			
18-Bit TTL/BTL Universal Storage Transceivers (IEEE Std 1194.1)	1650		✓			
18-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers	1612				✓	
18-Bit LVTTTL-to-GTL/GTL+ Universal Bus Transceivers	16612			✓		
18-Bit LVTTTL-to-GTLP Universal Bus Transceivers	16612				✓	
	16912				✓	
18-Bit LVTTTL-to-GTL/GTL+ Bus Transceivers	16622			✓		
	16923			✓		
18-Bit LVTTTL-to-GTLP Bus Transceivers with Source-Synchronous Clock Outputs	16927				✓	
32-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers	3245				✓	
32-Bit LVTTTL-to-GTLP Bus Transceivers	32945				✓	
34-Bit LVTTTL-to-GTLP Universal Bus Transceivers	32916				✓	
36-Bit LVTTTL-to-GTLP Universal Bus Transceivers	32912				✓	

BOUNDARY-SCAN (JTAG) LOGIC

Boundary-Scan (JTAG) Bus Devices

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			ABT	BCT	LVT
Scan-Test Devices with Octal Buffers	3S	8240		✓	
		8244		✓	
Scan-Test Devices with Octal Bus Transceivers and Registers	3S	8646	✓		
		8652	✓		
Scan-Test Devices with Octal D-Type Latches	3S	8373		✓	
Scan-Test Devices with Octal D-Type Edge-Triggered Flip-Flops	3S	8374		✓	
Scan-Test Devices with Octal Registered Bus Transceivers		8543	✓		
		8952	✓		
Scan-Test Devices with Octal Transceivers	3S	8245	✓	✓	
Scan-Test Devices with 18-Bit Bus Transceivers		18245	✓		
Scan-Test Devices with 18-Bit Inverting Bus Transceivers		18640	✓		
Scan-Test Devices with 18-Bit Transceivers and Registers	3S	18646	✓		✓
		182646	✓		✓
		18652	✓		✓
		182652	✓		✓
Scan-Test Devices with 18-Bit Universal Bus Transceivers	3S	18502	✓		✓
		182502	✓		✓
		18511			✓
		18512			✓
		182512			✓
Scan-Test Devices with 20-Bit Universal Bus Transceivers	3S	18504	✓		✓
		182504	✓		✓
		18514			✓

SPECIALTY LOGIC

Boundary-Scan (JTAG) Support Devices

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			ABT	ACT	LVT
Embedded Test-Bus Controllers with 8-Bit Generic Host Interfaces	3S	8980			✓
Test-Bus Controllers IEEE Std 1149.1 (JTAG) TAP Masters with 16-Bit Generic Host Interfaces	3S	8990		✓	
10-Bit Addressable Scan Ports Multidrop-Addressable IEEE Std 1149.1 (JTAG) TAP Transceivers		8996	✓		✓
10-Bit Linking Addressable IEEE Std 1149.1 (JTAG) TAP Transceivers	3S	8986			✓
Scan-Path Linkers with 4-Bit Identification Buses Scan-Controlled IEEE Std 1149.1 (JTAG) TAP Concatenators	3S	8997		✓	

Bus-Termination Arrays and Networks

DESCRIPTION	TYPE	TECHNOLOGY			
		ACT	CD4K	F	S
Dual 4-Bit Programmable Terminators	40117		✓		
8-Bit Schottky Barrier Diode Bus-Termination Arrays	1056			✓	
10-Bit Bus-Termination Networks with Bus Hold	1071	✓			
12-Bit Schottky Barrier Diode Bus-Termination Arrays	1050				✓
	1051				✓
16-Bit Bus-Termination Networks with Bus Hold	1073	✓			
16-Bit Schottky Barrier Diode Bus-Termination Arrays	1052				✓
	1053				✓
16-Bit Schottky Barrier Diode R-C Bus-Termination Arrays	1016			✓	

DIMM Memory Drivers and Transceivers

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY				
			HSTL	SSTL	SSTU	SSTV	SSTVF
9-Bit to 18-Bit HSTL-to-LVTTL Memory Address Latches		16918	✓				
9-Bit to 18-Bit HSTL-to-LVTTL Memory Address Latches with Input Pullup Resistors		16919	✓				
13-Bit to 26-Bit Registered Buffers with SSTL_2 Inputs and Outputs		16859				✓	✓
14-Bit Registered Buffers with SSTL_2 Inputs and Outputs		16857				✓	✓
14-Bit SSTL_2 Registered Buffers		16857		✓			
14-Bit to 28-Bit HSTL-to-LVTTL Memory Address Latches		162822	✓				
20-Bit SSTL_3 Interface Buffers	3S	16847		✓			
20-Bit SSTL_3 Interface Universal Bus Drivers	3S	16837		✓			
24-Bit to 48-Bit Registered Buffers with SSTL_2 Inputs and Outputs		32852				✓	✓
25-Bit Configurable Registered Buffers with Address-Parity Test		32866			✓		
25-Bit Configurable Registered Buffers with SSTL_18 Inputs and Outputs		32864			✓		
		32864C			✓		
		32864D			✓		
26-Bit Registered Buffers with SSTL_2 Inputs and LVCMOS Outputs		32867				✓	
26-Bit Registered Buffers with SSTL_2 Inputs and Outputs		32877				✓	

SPECIALTY LOGIC

FIFOs (FIRST-IN, FIRST-OUT MEMORIES)

Asynchronous FIFO Memories

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY							
			ABT	ACT	ALS	ALVC	CD4K	HC	HCT	S
16 × 4	3S	232			✓					
		40105					✓	✓	✓	
16 × 5	3S	225								✓
		229			✓					
64 × 4	3S	236			✓					
64 × 18	3S	7814		✓						
64 × 18 3.3 V	3S	7814				✓				
256 × 18	3S	7806		✓						
256 × 18 3.3 V	3S	7806				✓				
512 × 18	3S	7804		✓						
512 × 18 3.3 V	3S	7804				✓				
512 × 18 × 2 Bidirectional	3S	7820	✓							
1024 × 9 × 2 Bidirectional	3S	2235		✓						
1024 × 18	3S	7802		✓						
2048 × 9	3S	7808		✓						

Synchronous FIFO Memories

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY				
			ABT	ACT	ALVC	LS	V
16 × 4	3S	224				✓	
64 × 1 × 2 Independent	3S	2226		✓			
		2227		✓			
64 × 18	3S	7813		✓			
64 × 18 3.3 V	3S	7813			✓		
64 × 36	3S	3611	✓				
		3613	✓				
64 × 36 × 2 Bidirectional	3S	3612	✓				
		3614	✓				

Synchronous FIFO Memories (continued)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY				
			ABT	ACT	ALVC	LS	V
256 × 1 × 2 Independent	3S	2228		✓			
		2229		✓			
256 × 18	3S	7805		✓			
256 × 18 3.3 V	3S	7805			✓		
256 × 36 × 2 Bidirectional	3S	3622		✓			
512 × 18	3S	7803		✓			
512 × 18 3.3 V	3S	215					✓
		7803			✓		
512 × 18 × 2 Bidirectional	3S	7819	✓				
512 × 36	3S	3631		✓			
512 × 36 × 2 Bidirectional	3S	3632		✓			
		3638		✓			
1024 × 18	3S	7801		✓			
		7811		✓			
		7881		✓			
1024 × 18 3.3 V	3S	225					✓
1024 × 36	3S	3641		✓			
1024 × 36 3.3 V	3S	3640					✓
		3641			✓		
2048 × 9	3S	7807		✓			
2048 × 18	3S	7882		✓			
2048 × 18 3.3 V	3S	235					✓
2048 × 36	3S	3651		✓			
2048 × 36 3.3 V	3S	3650					✓
		3651			✓		
4096 × 18 3.3 V	3S	245					✓
4096 × 36 3.3 V	3S	3660					✓
8192 × 18 or 16384 × 9 3.3 V	3S	263					✓
8192 × 36 3.3 V	3S	3670					✓
16384 × 18 or 32768 × 9 3.3 V	3S	273					✓
16384 × 36 3.3 V	3S	3680					✓
32768 × 18 or 65536 × 9 3.3 V	3S	283					✓
32768 × 36 3.3 V	3S	3690					✓
65536 × 18 or 131072 × 9 3.3 V	3S	293					✓

SPECIALTY LOGIC

IEEE Std 1284 (Parallel Port Interface)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			ACT	LV-A	LVC
7-Bit Bus Interfaces	3S	1284	✓		
19-Bit Bus Interfaces	OD/TP	161284		✓	✓
19-Bit Translation Transceivers with Error-Free Power Up	OD/TP	161284			✓
	OD/TP	Z161284			✓

Miscellaneous Gate and Delay Elements

DESCRIPTION	TYPE	TECHNOLOGY
		LS
Hex Delay Elements for Generating Delay Lines	31	✓

Monostable Multivibrators

DESCRIPTION	TYPE	TECHNOLOGY								
		AHC	AHCT	CD4K	HC	HCT	LS	LV	LVC	TTL
Low Power Monostable/Astable	4047			✓						
Monostable Multivibrators with Schmitt-Trigger Inputs	121									✓
Retriggerable	122						✓			
Single Retriggerable with Schmitt-Trigger Inputs	1G123								✓	
Dual	4098			✓						
Dual with Schmitt-Trigger Inputs	221				✓	✓	✓	✓		✓
Dual Precision	14538			✓						
Dual Retriggerable with Reset	123	✓	✓		✓	✓	✓	✓		✓
	423				✓	✓	✓			
Dual Retriggerable Precision	4538				✓	✓				

PHASE-LOCKED LOOPS (PLLs) AND OSCILLATORS

PLLs

DESCRIPTION	TYPE	TECHNOLOGY				
		ACT	CD4K	HC	HCT	LS
Digital PLLs	297	✓		✓	✓	✓
PLLs with VCO	4046		✓	✓	✓	
PLLs with VCO and Lock Detectors	7046			✓	✓	

Oscillators

DESCRIPTION	TYPE	TECHNOLOGY	
		LS	S
Single Crystal Controlled	321	✓	
Single Voltage Controlled	624	✓	
	628	✓	
Dual Voltage Controlled	124		✓
	629	✓	

Rate Multipliers and Frequency Dividers/Timers

DESCRIPTION	TYPE	TECHNOLOGY		
		CD4K	LS	TTL
4-Bit Binary Rate Multipliers	4089	✓		
BCD Rate Multipliers	4527	✓		
Synchronous 6-Bit Binary Rate Multipliers	97			✓
24-Stage Frequency Dividers	4521	✓		
Programmable Frequency Dividers/Digital Timers	292		✓	
	294		✓	
Programmable Timers	4536	✓		
	4541	✓		

UNIVERSAL BUS FUNCTIONS

Universal Bus Drivers (UBDs)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			ALVC	AVC	LVT
12 Bit with Parity Checker and Dual 3-State Outputs	3S	16903	✓		
16 Bit	3S	16334	✓	✓	
		162334	✓		
18 Bit	3S	16834	✓	✓	
		162834	✓		
		16835	✓	✓	✓
		162835	✓		
20 Bit	3S	162836	✓		

Universal Bus Exchangers (UBEs)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY		
			ABT	ALVC	AVC
9 Bit 4 Port	3S	16409		✓	
		162409		✓	
12 Bit to 24 Bit Multiplexed	3S	16271		✓	
12 Bit to 24 Bit Registered	3S	16269		✓	✓
		16270		✓	
		162268		✓	
16 Bit to 32 Bit with Byte Masks	3S	162280		✓	
16 Bit Tri-Port	3S	32316	✓		
18 Bit to 36 Bit Registered	3S	16282		✓	
		162282		✓	
18 Bit Tri-Port	3S	32318	✓		

Universal Bus Transceivers (UBTs)

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY									
			ABT	ALVC	ALVT	AUC	FCT	GTL	GTLP	LVC	LVT	VME
8 Bit and Two 1-Bit Split Outputs with Feedback Path	3S	22501										✓
16 Bit LVTTL to GTL/GTL+ with Live Insertion		1655						✓				
16 Bit LVTTL to GTLP Adjustable Edge Rate	3S	1655							✓			
17 Bit LVTTL to GTLP Adjustable Edge Rate	3S	1616							✓			
17 Bit LVTTL to GTL/GTL+		16616						✓				
17 Bit LVTTL to GTLP with Buffered Clock	3S	16916							✓			
18 Bit	3S	16500	✓	✓			✓				✓	
		162500	✓				✓					
		16501	✓	✓		✓	✓				✓	
		162501	✓				✓					
		16600	✓	✓								
		16601	✓	✓	✓							
		162601	✓	✓								
18 Bit with Boundary Scan	3S	18511									✓	
18 Bit with Parity Generators/Checkers	3S	16901		✓						✓		
18 Bit LVTTL to GTL/GTL+		16612						✓				
18 Bit LVTTL to GTLP	3S	16612							✓			
		16912							✓			
18 Bit LVTTL to GTLP Adjustable Edge Rate	3S	1612							✓			
32 Bit	3S	32501	✓	✓								

VOLTAGE-LEVEL TRANSLATION

Application Specific [CompactFlash™, SD Cards, MultiMediaCards (MMCs), I²C]

DESCRIPTION	TYPE	TECHNOLOGY	
		AVC	LV-A
Voltage-Translation Transceivers for MMCs, SD Cards, Memory Stick™ Compliant Products, SmartMedia Cards, and xD-Picture Cards™	A406	✓	
Low-Power, Dual-Supply, Level-Translating CompactFlash Interfaces with 16-Bit Data, 11-Bit Address	4320		✓

Dual-Supply Translators

DESCRIPTION		TYPE	TECHNOLOGY		
			ALVC	AVC	LVC
Single Bus Transceivers Translate Between 1.65 V to 5.5 V		1T45			✓
Dual Bus Transceivers	Translate Between 1.2 V to 3.6 V	2T45		✓	
	Translate Between 1.65 V to 5.5 V	2T45			✓
Octal Bus Transceivers	Translate Between 1.4 V to 3.6 V	8T245		✓	
	Translate Between 1.65 V to 5.5 V	8T245			+
	Translate Between 2.3 V to 3.6 V and 3 V to 5.5 V	C3245			✓
	Translate Between 2.7 V to 3.6 V and 4.5 V to 5.5 V	4245			✓
	Translate Between 2.7 V to 5.5 V and 4.5 V to 5.5 V	C4245			✓
16-Bit Bus Transceivers	Translate Between 1.4 V to 3.6 V	A164245		✓	
		B164245		✓	
	Translate Between 1.4 V to 3.6 V and 1.2 V to 3.6 V	16T245		✓	
	Translate Between 2.5 V to 3.3 V and 3.5 V to 5 V	164245	✓		
20-Bit Bus Transceivers Translate Between 1.4 V to 3.6 V and 1.2 V to 3.6 V		20T245		✓	
24-Bit Bus Transceivers Translate Between 1.4 V to 3.6 V and 1.2 V to 3.6 V		24T245		✓	
32-Bit Bus Transceivers	Translate Between 1.4 V to 3.6 V	B324245		✓	
	Translate Between 1.4 V to 3.6 V and 1.2 V to 3.6 V	32T245		✓	

ECL/TTL Translators

DESCRIPTION	OUTPUT	TYPE	TECHNOLOGY
			ECL
Octal	3S	10KHT5541	✓
Octal with Edge-Triggered D-Type Flip-Flops	3S	10KHT5574	✓
Octal TTL-to-ECL with Edge-Triggered D-Type Flip-Flops and Output Enable		10KHT5578	✓
Octal TTL-to-ECL with Output Enable		10KHT5542	✓
		10KHT5543	✓

GTL/TTL Translators

DESCRIPTION	TYPE	TECHNOLOGY
		GTL
12-Bit GTL-/GTL/GTL+ to LVTTTL	2007	✓
13-Bit GTL-/GTL/GTL+ to LVTTTL	2006	✓

Single-Supply Translators

DESCRIPTION	TYPE	TECHNOLOGY
		AUP
Voltage Translators	1T57	✓
	1T58	✓
	1T97	✓
	1T98	✓

VOLTAGE-LEVEL TRANSLATION

Translating Bus Switches

DESCRIPTION	TYPE	TECHNOLOGY			
		CB3T	CBT	CBTC	TVC
Single FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	1G125	✓			
Single FET Bus Switches with Level Shifting	1G125		✓		
	1G384		✓		
Dual FET Bus Switches with Level Shifting	3306		✓		
Dual FET Bus Switches with Level Shifting and -2-V Undershoot Protection	3305			✓	
	3306			✓	
Dual Bus Switch Voltage Translators	3306	✓			
Dual 1-of-4 FET Multiplexers/Demultiplexers 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	3253	✓			
Dual Voltage Clamps	3306				✓
4-Bit 1-of-2 FET Multiplexing/Demultiplexing Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	3257	✓			
Quad FET Bus Switches with 5-V-Tolerant Level Shifters	3125	✓			
8-Bit FET Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	3245	✓			
10-Bit FET Bus Switches with Level Shifting	3384		✓		
	3861		✓		
10-Bit FET Bus Switches with Level Shifting and -2-V Undershoot Protection	3384			✓	
10-Bit FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	3384	✓			
10-Bit Voltage Clamps	3010				✓
20-Bit FET Bus Switches with Level Shifting	16210		✓		
20-Bit FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	16210	✓			
22-Bit Voltage Clamps	16222				✓
24-Bit FET Bus Switches with Level Shifting	16211		✓		
24-Bit FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	16211	✓			
24-Bit FET Bus-Exchange Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters	16212	✓			

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

4

FUNCTIONAL CROSS-REFERENCE

✓ Product available in technology indicated

● Product available in reduced-noise advanced CMOS (11000 series)

✦ New product planned in technology indicated

DEVICE	BiCMOS						BIPOLAR						CMOS																				OTHER															
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME		
1G00															✓	✓		✓	✓												✓																	
1G02															✓	✓		✓	✓												✓																	
1G04															✓	✓		✓	✓												✓																	
1GU04															✓			✓	✓												✓																	
1GX04																			✓	✓											✓																	
1G06																		✓	✓												✓																	
1G07																		✓	✓												✓																	
1G08															✓	✓		✓	✓												✓																	
1G0832																																✓																
1G10																		+													✓																	
1G11																		+													✓																	
1G14															✓	✓		✓	✓												✓																	
1G17																		✓	✓												✓																	
1G18																		+													✓																	
1G19																		✓													✓																	
1G27																		+													✓																	
1G32															✓	✓		✓	✓												✓																	
1G34																															✓																	
1G38																															✓																	
1G57																		+	✓												✓																	
1G58																		+	✓												✓																	
1G66																		✓													✓																	
1G74																		✓													✓																	
1G79																		✓	✓												✓																	
1G80																		✓	✓												✓																	
1G86															✓	✓		✓													✓																	
1G97																		+	✓												✓																	
1G98																		+	✓												✓																	

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																		OTHER																		
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/IV-A/IV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME			
2G34																		✓														✓																	
2G38																																✓																	
2G53																		✓														✓																	
2G66																		✓														✓																	
2G74																		+														✓																	
2G79																		✓														✓																	
2G80																		✓														✓																	
2G86																		✓														✓																	
2G125																		✓														✓																	
2G126																		✓														✓																	
2G132																																✓																	
2G157																		+														✓																	
2G240																		✓														✓																	
2G241																		✓														✓																	
2G257																		+																															
2T45																				✓												✓																	
2T245																		✓																															
3G04																		+														✓																	
3GU04																		+														✓																	
3G06																		+														✓																	
3G07																		+														✓																	
3G14																		+														✓																	
3G17																		+														✓																	
3G34																		+														✓																	
8T245																				✓												+																	
16T245																				✓												+																	
20T245																				✓																													
24T245																				✓																													
32T245																				✓																													

DEVICE	BiCMOS						BIPOLAR						CMOS																				OTHER																	
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	s	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME				
00							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓																	
02							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓																	
03							✓			✓	✓	✓	✓		✓	✓	✓	✓											✓	✓	✓																			
04							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓	✓																
U04															✓			✓											✓			✓	✓	✓																
05							✓			✓	✓		✓	✓	✓														✓			✓	✓																	
06										✓	✓	✓						✓															✓	✓																
07										✓	✓	✓	✓					✓	✓													✓	✓	✓	✓															
08							✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓	✓																
09							✓			✓	✓																																							
10							✓	✓	✓	✓	✓	✓	✓	✓			✓												✓	✓	✓	✓	✓	✓																
11							✓	✓	✓	✓			✓	✓															✓	✓	✓	✓	✓																	
14										✓		✓	✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓																	
16												✓																																						
17												✓						✓																																
19										✓																																								
20							✓	✓	✓	✓	✓		✓	✓															✓	✓	✓	✓																		
21							✓	✓	✓	✓																			✓	✓	✓	✓																		
25												✓																																						
26										✓																																								
27							✓	✓	✓	✓																			✓	✓	✓	✓																		
30							✓	✓	✓	✓				•															✓	✓		✓																		
31										✓																																								
32							✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											✓	✓	✓	✓	✓																	
33							✓			✓																																								
34																		✓																																
35							✓																																											
37							✓			✓	✓	✓																																						
38							✓		✓	✓	✓	✓																																						

DEVICE	BiCMOS						BIPOLAR					CMOS																			OTHER																									
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME										
42										✓																			✓	✓																										
45												✓																																												
47										✓		✓																																												
51										✓	✓																																													
52																											✓																													
73										✓																			✓	✓	✓																									
74							✓	✓	✓	✓	✓		✓	•	✓	•	✓	✓		✓										✓	✓	✓	✓	✓																						
75										✓																				✓	✓	✓	✓	✓																						
85										✓	✓																			✓	✓	✓																								
86							✓	✓	✓	✓	✓		✓	•	✓		✓													✓	✓	✓	✓	✓																						
90										✓																																														
92										✓																																														
93										✓																				✓	✓																									
96										✓																																														
97												✓																																												
107										✓		✓																		✓	✓																									
109							✓	✓	✓	✓			✓	✓																✓	✓	✓																								
112							✓		✓	✓	✓		✓	✓																✓	✓		✓																							
121												✓																																												
122										✓																																														
123										✓		✓				✓	✓													✓	✓	✓																								
124											✓																																													
125	✓			✓	✓	✓			✓	✓						✓	✓	✓	✓											✓	✓	✓	✓	✓																						
126	✓			✓	✓	✓			✓	✓						✓	✓	✓	✓											✓	✓	✓	✓	✓																						
128												✓																																												
132										✓	✓	✓				✓	✓													✓	✓	✓																								
133							✓				✓																																													
136										✓																																														
137							✓																							✓	✓																									

[illegible]

DEVICE	BiCMOS						BIPOLAR					CMOS																		OTHER																										
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME										
192																													✓																											
193							✓			✓		✓																	✓	✓	✓																									
194								✓		✓																			✓	✓	✓																									
195																													✓																											
215																																																								
221										✓		✓																	✓	✓	✓	✓																								
224																																																								
225											✓																																													
229																																																								
232																																																								
235																																																								
236																																																								
237																														✓	✓	✓																								
238													✓	✓																✓	✓	✓																								
240	✓			✓		✓	✓	✓	✓	✓	✓		✓	•	✓	✓	✓		✓											✓	✓	✓	✓	✓																						
241	✓			✓		✓	✓	✓	✓	✓	✓		✓	✓																✓	✓	✓	✓																							
243							✓			✓																				✓	✓	✓																								
244	✓			✓	✓	✓	✓	✓	✓	✓	✓		✓	•	✓	✓	✓	✓	✓									✓	✓	✓	✓	✓	✓	✓																						
245	✓			✓	✓	✓	✓	✓	✓	✓			✓	•	✓	✓	✓	✓	✓		✓							✓	✓	✓	✓	✓	✓	✓																						
247										✓																																														
250								✓																																																
251							✓		✓	✓			✓																	✓	✓	✓																								
253							✓	✓	✓	✓	✓		✓	✓																✓	✓	✓																								
257							✓	✓	✓	✓	✓	✓	✓	•	✓	✓												✓	✓	✓	✓																									
258							✓	✓	✓	✓	✓			✓																✓	✓	✓																								
259							✓			✓																				✓	✓	✓																								
260									✓		✓																																													
263																																				✓																				
266										✓																				✓																										

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																				OTHER																
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME			
393										✓		✓																	✓	✓	✓	✓																	
399										✓																		✓																					
406																			✓																														
423										✓																			✓	✓																			
442										✓																																							
465										✓																																							
480																												✓																					
518							✓																																										
520							✓		✓																			✓																					
521							✓		✓																																								
533	✓						✓	✓					✓	✓																✓		✓																	
534	✓	✓					✓						✓	✓																✓	✓	✓	✓																
540	✓	✓		✓		✓	✓			✓			✓	✓		✓	✓											✓	✓	✓	✓	✓	✓																
541	✓	✓		✓		✓	✓		✓	✓			✓	✓		✓	✓											✓	✓	✓	✓	✓	✓																
543	✓			✓		✓			✓						•													✓																					
561							✓																																										
563							✓						✓	✓																✓		✓																	
564							✓						✓	✓														✓	✓	✓	✓																		
569							✓																																										
573	✓			✓		✓	✓	✓	✓				✓	✓		✓	✓											✓	✓	✓	✓	✓																	
574	✓			✓		✓	✓	✓	✓				✓	✓		✓	✓											✓	✓	✓	✓	✓	✓																
575							✓	✓																																									
576							✓	✓																																									
577							✓																																										
580							✓																																										
590										✓																				✓																			
592										✓																																							
593										✓																																							
594										✓						✓														✓		✓																	

DEVICE	BiCMOS						BIPOLAR						CMOS																	OTHER																					
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME					
595										✓					✓	✓													✓		✓																				
596										✓																																									
597										✓																			✓		✓																				
598										✓																																									
599										✓																																									
620	✓						✓																																												
621							✓																																												
623	✓			✓			✓		✓	✓			✓	✓														✓	✓	✓																					
624										✓																																									
628										✓																																									
629										✓																																									
638							✓		✓																																										
639							✓		✓																																										
640	✓			✓			✓		✓	✓																				✓	✓																				
641							✓		✓	✓																																									
642							✓		✓	✓																																									
645							✓		✓	✓																				✓	✓																				
646	✓					✓				✓	✓			✓	✓													✓	✓	✓			✓																		
648							✓		✓																																										
651	✓																																																		
652	✓					✓	✓			✓			✓	✓	.													✓	✓	✓			✓																		
653							✓																																												
654							✓																																												
657	✓							✓																																											
666							✓																																												
667							✓																																												
669										✓	✓																																								
670										✓	✓																		✓	✓																					
673										✓																																									

DEVICE	BiCMOS						BIPOLAR					CMOS																			OTHER																				
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME					
674										✓																																									
679							✓																																												
682										✓																			✓																						
684										✓																			✓	✓																					
688							✓			✓																			✓	✓																					
697										✓																																									
746							✓																																												
756				✓				✓																																											
757				✓	✓			✓																																											
760				✓			✓	✓																																											
804							✓	✓																																											
805							✓	✓																																											
808								✓																																											
817																																																			
818																												✓																							
821	✓							✓																																											
823	✓							✓																																											
825								✓																																											
827	✓																											✓																							
828																																																			
832							✓	✓																																											
833	✓																																																		
841	✓						✓	✓																																											
843	✓						✓	✓																				✓																							
845							✓																																												
853	✓																																																		
857							✓																																												
861	✓																																																		
863	✓																																																		

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																		OTHER																				
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME					
1394																																																			
1395																																																			
1404																																																			
1444																																																			
1612																																																			
1616																																																			
1627																																																			
1640							✓																																												
1645							✓																																												
1650																																																			
1651																																																			
1653																																																			
1655																																																			
1804								✓																																											
2006																																																			
2007																																																			
2031																																																			
2033																																																			
2034																																																			
2040																																																			
2041																																																			
2226																																																			
2227																																																			
2228																																																			
2229																																																			
2235																																																			
2240	✓			✓			✓																					✓																							
2241	✓			✓																																															
2244	✓			✓				✓																				✓																							

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																	OTHER																	
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME	
3614																																															
3622																																															
3631																																															
3632																																															
3638																																															
3640																																															
3641																																															
3650																																															
3651																																															
3660																																															
3670																																															
3680																																															
3690																																															
3857																																															
3861																																															
4001																																															
4002																																															
4007																																															
4009																																															
4010																																															
4011																																															
4012																																															
4013																																															
4014																																															
4015																																															
4016																																															
4017																																															
4018																																									</						

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																		OTHER																	
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME		
4054																										✓																						
4055																										✓																						
4056																										✓																						
4059																										✓		✓																				
4060																										✓		✓		✓																		
4063																										✓																						
4066															✓											✓		✓		✓		✓																
4067																										✓		✓		✓																		
4068																										✓																						
4069																										✓																						
4070																										✓																						
4071																										✓																						
4072																										✓																						
4073																										✓																						
4075																										✓		✓																				
4076																										✓																						
4077																										✓																						
4078																										✓																						
4081																										✓																						
4082																										✓																						
4085																										✓																						
4086																										✓																						
4089																										✓																						
4093																										✓																						
4094																										✓		✓																				
4097																										✓																						
4098																										✓																						
4099																																																

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																		OTHER																			
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME				
4724																										✓																								
4851																													✓																					
4852																													✓	✓																				
5400	✓	✓																																																
5401	✓	✓																																																
5402	✓	✓																																																
5403	✓																																																	
6800																					✓		✓	✓																										
6845																																																		
7001																														✓																				
7002																														✓	✓																			
7032																														✓	✓																			
7046																														✓	✓	✓																		
7266																														✓																				
7802																																																		
7803																																																		
7804																																																		
7805																																																		
7806																																																		
7807																																																		
7808																																																		
7811																																																		
7813																																																		
7814																																																		
7819																																																		
7820																																																		
7881																																																		
7882																																																		
8003								✓																																										

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																			OTHER																	
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME			
11138													✓																																				
11139														✓																																			
11175													✓																																				
11240													✓	✓																																			
11244													✓	✓																																			
11245													✓	✓																																			
11257													✓	✓																																			
11286														✓																																			
11373														✓																																			
11374														✓																																			
11543														✓																																			
11652														✓																																			
14538																										✓																							
16209																							✓																										
16210																					✓	✓	✓	✓	✓																								
16211																					✓	✓	✓	✓	✓																								
16212																						✓	✓	✓	✓	✓																							
16213																							✓																										
16214																							✓	✓																									
16222																																		✓															
16232																							✓																										
16233																							✓																										
16240	✓		✓			✓								✓	✓	✓	✓	✓	✓								✓					✓																	
16241	✓					✓																																											
16244	✓	✓	✓			✓							✓	✓	✓	✓	✓	✓	✓	✓		✓	✓				✓					✓																	
16245	✓	✓	✓			✓							✓	✓		✓	✓	✓	✓	✓	✓		✓	✓			✓					✓																	
16246																																																	
16260	✓																																																
16269																				✓																													

DEVICE	BiCMOS						BIPOLAR						CMOS																	OTHER																					
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME					
16270																	✓																																		
16271																	✓																																		
16282																	✓																																		
16292																							✓			✓																									
16334																					✓																														
16344																																																			
16373	✓		✓			✓							✓	✓	✓	✓	✓	✓		✓							✓						✓																		
16374	✓		✓			✓							✓	✓	✓	✓	✓	✓		✓							✓						✓																		
16390																							✓																												
16409																	✓																																		
16460	✓																																																		
16470	✓																																																		
16500	✓					✓											✓										✓																								
16501	✓					✓											✓	✓									✓																								
16524																	✓										✓																								
16525																	✓																																		
16540	✓															✓																																			
16541	✓					✓				</																																									

[illegible]

[illegible]

[illegible]

DEVICE	BiCMOS						BIPOLAR						CMOS																		OTHER																			
	ABT	ALB	ALVT	BCT	64BCT	LVT	ALS	AS	F	LS	S	TTL	AC	ACT	AHC	AHCT	ALVC	AUC	AUP	AVC	CB3Q	CB3T	CBT	CBT-C	CBTLV	CD4K	FCT	HC	HCT	LV/LV-A/LV-AT	LVC	TVC	ABTE	FB	FIFO	GTL	GTLP	HSTL	JTAG	PCA	PCF	SSTL	SSTU	SSTV	SSTVF	VME				
162646																											✓																							
162652																											✓																							
162721																	✓																																	
162820																	✓																																	
162822																																																		
162823	✓																										✓																							
162825	✓																										✓																							
162827	✓		✓														✓										✓																							
162830																	✓																																	
162831																	✓																																	
162832																	✓																																	
162834																	✓																																	
162835																	✓																																	
162836																	✓																																	
162841	✓																✓										✓																							
162952																											✓																							
164245																	✓			✓																														
182502																																							✓											
182504																																							✓											
182512																																							✓											
182646																																							✓											
182652																																							✓											
322374						✓																																												
324245																				✓																														
34X245																							✓																											

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOLS/ALTERNATE SOURCES	B



DEVICE SELECTION GUIDE

SECTION 5

DEVICE SELECTION GUIDE

CONTENTS

ABT – Advanced BiCMOS Technology Logic	5–5
ABTE/ETL – Advanced BiCMOS Technology/Enhanced Transceiver Logic	5–13
AC/ACT – Advanced CMOS Logic	5–15
AHC/AHCT – Advanced High-Speed CMOS Logic	5–23
ALB – Advanced Low-Voltage BiCMOS Logic	5–29
ALS – Advanced Low-Power Schottky Logic	5–31
ALVC – Advanced Low-Voltage CMOS Technology Logic	5–37
ALVT – Advanced Low-Voltage BiCMOS Technology Logic	5–43
AS – Advanced Schottky Logic	5–45
AUC – Advanced Ultra-Low-Voltage CMOS Logic	5–49
AUP – Advanced Ultra-Low-Power CMOS Logic	5–53
AVC – Advanced Very-Low-Voltage CMOS Logic	5–55
BCT – BiCMOS Technology Logic	5–59
64BCT – 64-Series BiCMOS Technology Logic	5–62
BTA – Bus-Termination Arrays	5–63
CB3Q – 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus-Switch Crossbar Technology Logic	5–65
CB3T – 2.5-V/3.3-V Low-Voltage Translator Bus-Switch Crossbar Technology Logic	5–69
CBT – Crossbar Technology Logic	5–71
CBT-C – 5-V Bus-Switch Crossbar Technology Logic With –2-V Undershoot Protection	5–75
CBTLV – Low-Voltage Crossbar Technology Logic	5–79
CD4000 – CMOS B-Series Integrated Circuits	5–81
74F – Fast Logic	5–85
FB+/BTL – FutureBus+/Backplane Transceiver Logic	5–89
FCT – Fast CMOS TTL Logic	5–91
FIFO – First-In, First-Out Memories	5–99
GTL – Gunning Transceiver Logic	5–103
GTLP – Gunning Transceiver Logic Plus	5–105
HC/HCT – High-Speed CMOS Logic	5–111
IEEE Std 1149.1 (JTAG) Boundary-Scan Logic	5–123
Little Logic	5–127
LS – Low-Power Schottky Logic	5–133
LV-A – Low-Voltage CMOS Technology Logic	5–139
LV-AT – Low-Voltage CMOS Technology Logic – TTL Compatible	5–143
LVC – Low-Voltage CMOS Technology Logic	5–145
LVT – Low-Voltage BiCMOS Technology Logic	5–155
PCA/PCF – I ² C Inter-Integrated Circuit Applications	5–161
S – Schottky Logic	5–163
Signal Switch	5–167
SSTL – Stub Series-Terminated Logic	5–179
HSTL – High-Speed Transceiver Logic	5–179
SSTU – Stub Series-Terminated Ultra-Low-Voltage Logic	5–181
SSTV/SSTVF – Stub Series-Terminated Low-Voltage Logic	5–185
TTL – Transistor-Transistor Logic	5–899
TVC – Translation Voltage Clamp Logic	5–193
VME – VERSAmodule Eurocard Bus Technology	5–195

ABT

Advanced BiCMOS Technology Logic

The ABT family, TI's second-generation family of BiCMOS bus-interface products, is manufactured using a 0.8- μ BiCMOS process. It provides high drive up to 64 mA and propagation delays in the 5-ns range, while maintaining very low power consumption. ABT products are well suited for live-insertion applications, with an I_{off} specification of 0.1 mA and power-up 3-state (PU3S) circuitry.

The ABT family offers series-damping-resistor options where reduced transmission-line effects are required. Special ABT parts that provide high-current drive (180 mA) for use with 25- Ω transmission lines also are offered. Advanced bus functions, such as UBT™ transceivers, emulate a wide variety of bus-interface functions. Multiplexing options for memory interleaving and bus upsizing or downsizing also are provided.

The ABT devices can be purchased in octal, Widebus™, or Widebus+™. The Widebus and Widebus+ packages feature higher performance, with reduced noise and flow-through pinout for easier board layout. Widebus+ devices offer input bus-hold circuitry to eliminate the need for external pullup resistors for floating inputs.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

ABT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABT125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓		✓	✓	✓		✓			SCBS182
SN74ABT126	14	Quad Bus Buffers with 3-State Outputs		✓	✓		✓	✓	✓		✓			SCBS183
SN74ABT240A	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS098
SN74ABT241	20	Octal Buffers/Drivers with 3-State Outputs	✓											SCBS184
SN74ABT241A	20	Octal Buffers/Drivers with 3-State Outputs		✓			✓	✓	✓		✓			SCBS184
SN54ABT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓											SCBS099
SN74ABT244A	20	Octal Buffers and Line Drivers with 3-State Outputs		✓			✓	✓	✓		✓			SCBS099
SN74ABT245A	20	Octal Bus Transceivers with 3-State Outputs	✓											SCBS081
SN74ABT245B	20	Octal Bus Transceivers with 3-State Outputs		✓	✓		✓	✓	✓		✓	✓	✓	SCBS081
SN74ABTH245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓			✓		✓		✓	✓		SCBS663
SN74ABT273	20	Octal D-Type Flip-Flops with Clear	✓	✓			✓	✓	✓		✓			SCBS185
SN74ABT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS155
SN54ABT374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓											SCBS111
SN74ABT374A	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs		✓			✓	✓	✓		✓			SCBS111
SN74ABT377	20	Octal D-Type Flip-Flops with Enable	✓											SCBS156
SN74ABT377A	20	Octal D-Type Flip-Flops with Enable	✓	✓			✓	✓	✓		✓			SCBS156
SN74ABT533	20	Octal Inverting Transparent Latches with 3-State Outputs	✓											SCBS186
SN74ABT533A	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS186

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABT534	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓											SCBS187
SN74ABT534A	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS187
SN74ABT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs		✓			✓	✓	✓					SCBS188
SN54ABT541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓											SCBS093
SN74ABT541B	20	Octal Buffers and Line Drivers with 3-State Outputs		✓			✓	✓	✓		✓			SCBS093
SN74ABT543	24	Octal Registered Transceivers with 3-State Outputs	✓											SCAS422
SN74ABT543A	24	Octal Registered Transceivers with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS157
SN74ABT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓											SCBS190
SN74ABT573A	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓		✓	✓	✓		✓		✓	SCBS190
SN54ABT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓											SCBS191
SN74ABT574A	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓		✓	✓	✓		✓		✓	SCBS191
SN74ABT620	20	Octal Bus Transceivers with 3-State Outputs		✓			✓	✓	✓					SCBS113
SN74ABT623	20	Octal Bus Transceivers with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS114
SN74ABT640	20	Octal Bus Transceivers with 3-State Outputs		✓			✓	✓	✓		✓			SCBS104
SN74ABT646	24	Octal Registered Bus Transceivers with 3-State Outputs		✓			✓		✓		✓	✓		SCBS068
SN74ABT646A	24	Octal Registered Bus Transceivers with 3-State Outputs	✓	✓			✓	✓	✓		✓	✓		SCBS069
SN74ABT651	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓			✓	✓	✓					SCBS083
SN74ABT652A	24	Octal Bus Transceivers and Registers with 3-State Outputs	✓	✓			✓	✓	✓					SCBS072
SN74ABT657A	24	Octal Bus Transceivers with Parity Generators/Checkers and 3-State Outputs		✓			✓	✓	✓					SCBS192
SN54ABT821	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓											SCBS193
SN74ABT821A	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓			✓	✓	✓					SCBS193
SN74ABT823	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓			✓	✓	✓					SCBS158
SN74ABT827	24	10-Bit Buffers/Drivers with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS159

DEVICE SELECTION GUIDE

ABT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABT833	24	8-Bit to 9-Bit Parity Bus Transceivers	✓	✓			✓	✓						SCBS195
SN74ABT841	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs	✓											SCBS196
SN74ABT841A	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓			✓	✓	✓		✓			SCBS196
SN74ABT843	24	9-Bit Bus-Interface D-Type Latches with 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS197
SN74ABT853	24	8-Bit to 9-Bit Parity Bus Transceivers	✓	✓			✓	✓	✓		✓			SCBS198
SN74ABT861	24	10-Bit Transceivers with 3-State Outputs		✓			✓	✓						SCBS199
SN74ABT863	24	9-Bit Bus Transceivers with 3-State Outputs		✓			✓		✓					SCBS201
SN74ABT2240A	20	Octal Buffers and Line/MOS Drivers with Series Damping Resistors and 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS232
SN74ABT2241	20	Octal Buffers and Line/MOS Drivers with Series Damping Resistors and 3-State Outputs		✓			✓	✓	✓		✓			SCBS233
SN74ABT2244A	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS106
SN74ABT2245	20	Octal Transceivers and Line MOS Drivers with Series Damping Resistors and 3-State Outputs	✓	✓			✓	✓	✓		✓			SCBS234
SN74ABTR2245	20	Octal Transceivers and Line MOS Drivers with Series Damping Resistors and 3-State Outputs		✓			✓	✓	✓		✓	✓		SCBS680
SN74ABT2827	24	10-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs		✓			✓							SCBS648
SN74ABT2952A	24	Octal Bus Transceivers and Registers with 3-State Outputs	✓	✓			✓	✓	✓					SCBS203
SN74ABT5400A	28	11-Bit Line/Memory Drivers with 3-State Outputs					✓							SCBS661
SN74ABT5401	28	11-Bit Line/Memory Drivers with 3-State Outputs					✓							SCBS235
SN74ABT5402A	28	12-Bit Line/Memory Drivers with 3-State Outputs					✓							SCBS660
SN74ABT5403	28	12-Bit Line/Memory Drivers with 3-State Outputs					✓							SCBS236
SN74ABT16240A	48	16-Bit Buffers/Drivers with 3-State Outputs	✓						✓		✓	✓		SCBS095
SN74ABT16241A	48	16-Bit Buffers/Drivers with 3-State Outputs	✓						✓		✓	✓		SCBS096
SN74ABT16244A	48	16-Bit Buffers/Drivers with 3-State Outputs							✓		✓	✓		SCBS073

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABTH16244	48	16-Bit Buffers/Drivers with 3-State Outputs	✓						✓		✓			SCBS677
SN74ABT16245A	48	16-Bit Bus Transceivers with 3-State Outputs							✓		✓	✓		SCBS300
SN74ABTH16245	48	16-Bit Bus Transceivers with 3-State Outputs	✓						✓		✓	✓		SCBS662
SN74ABTH16260	56	12-Bit to 24-Bit Multiplexed D-Type Latches with 3-State Outputs	✓						✓					SCBS204
SN74ABT16373A	48	16-Bit Transparent D-Type Latches with 3-State Outputs	✓						✓		✓			SCBS160
SN74ABT16374A	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓						✓		✓			SCBS205
SN74ABTH16460	56	4-to-1 Multiplexed/Demultiplexed Transceivers with 3-State Outputs							✓		✓			SCBS207
SN74ABT16470	56	16-Bit Registered Transceivers with 3-State Outputs							✓		✓			SCBS085
SN74ABT16500B	56	18-Bit Universal Bus Transceivers with 3-State Outputs							✓		✓			SCBS057
SN74ABT16501	56	18-Bit Universal Bus Transceivers with 3-State Outputs							✓		✓			SCBS086
SN74ABT16540A	48	16-Bit Buffers/Drivers with 3-State Outputs							✓		✓	✓		SCBS208
SN74ABT16541A	48	16-Bit Buffers/Drivers with 3-State Outputs							✓		✓	✓		SCBS118
SN74ABT16543	56	16-Bit Registered Transceivers with 3-State Outputs	✓						✓		✓			SCBS087
SN74ABT16600	56	18-Bit Universal Bus Transceivers with 3-State Outputs							✓		✓			SCBS209
SN74ABT16601	56	18-Bit Universal Bus Transceivers with 3-State Outputs	✓						✓		✓			SCBS210
SN74ABT16623	48	16-Bit Bus Transceivers with 3-State Outputs							✓		✓			SCBS211
SN74ABT16640	48	16-Bit Bus Transceivers with 3-State Outputs	✓						✓		✓			SCBS107
SN74ABT16646	56	16-Bit Bus Transceivers and Registers with 3-State Outputs	✓						✓		✓			SCBS212
SN74ABT16652	56	16-Bit Bus Transceivers and Registers with 3-State Outputs	✓						✓					SCBS215
SN74ABT16657	56	16-Bit Transceivers with Parity Generators/Checkers and 3-State Outputs							✓		✓			SCBS103
SN74ABT16821	56	20-Bit D-Type Flip-Flops with 3-State Outputs							✓		✓			SCBS216
SN74ABT16823	56	18-Bit D-Type Flip-Flops with 3-State Outputs	✓						✓		✓			SCBS217

DEVICE SELECTION GUIDE

ABT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABTH16823	56	18-Bit D-Type Flip-Flops with 3-State Outputs							✓		✓			SCBS664
SN74ABT16825	56	18-Bit Buffers/Drivers with 3-State Outputs							✓					SCBS218
SN74ABT16827	56	20-Bit Buffers/Drivers with 3-State Outputs							✓				✓	SCBS220
SN74ABT16833	56	Dual 8-Bit to 9-Bit Parity Bus Transceivers							✓		✓			SCBS097
SN74ABT16841	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs	✓						✓					SCBS222
SN74ABT16843	56	18-Bit Bus-Interface D-Type Latches with 3-State Outputs							✓		✓			SCBS223
SN74ABT16853	56	Dual 8-Bit to 9-Bit Parity Bus Transceivers							✓		✓			SCBS153
SN74ABT16863	56	18-Bit Bus-Interface Transceivers with 3-State Outputs							✓					SCBS225
SN74ABT16952	56	16-Bit Registered Transceivers with 3-State Outputs	✓						✓		✓			SCBS082
SN74ABTH25245	24	25-Ω Octal Bus Transceivers with 3-State Outputs		✓			✓							SCBS251
SN74ABTH32245	100	32-Bit Bus Transceivers with 3-State Outputs								✓				SCBS228
SN74ABTH32316	80	16-Bit Tri-Port Universal Bus Exchangers	✓			✓								SCBS179
SN74ABTH32318	80	18-Bit Tri-Port Universal Bus Exchangers				✓								SCBS180
SN74ABTH32501	100	32-Bit Universal Bus Transceivers with 3-State Outputs								✓				SCBS229
SN74ABTH32543	100	32-Bit Registered Bus Transceivers with 3-State Outputs								✓				SCBS230
SN74ABT162244	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs	✓						✓		✓	✓		SCBS238
SN74ABT162245	48	16-Bit Bus Transceivers with Series Damping Resistors and 3-State Outputs	✓						✓		✓			SCBS239
SN74ABTH162245	48	16-Bit Bus Transceivers with Series Damping Resistors and 3-State Outputs							✓		✓	✓		SCBS712
SN74ABTH162260	56	12-Bit to 24-Bit Multiplexed D-Type Latches with Series Damping Resistors and 3-State Outputs							✓					SCBS240
SN74ABTH162460	56	4-to-1 Multiplexed/Demultiplexed Registered Transceivers with 3-State Outputs							✓		✓			SCBS241
SN74ABT162500	56	18-Bit Universal Bus Transceivers with 3-State Outputs							✓					SCBS242

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE
			MIL	PDIP	QFN	QFP	SOIC	SOP	SSOP	TQFP	TSSOP	TVSOP	VFBGA	
SN74ABT162501	56	18-Bit Universal Bus Transceivers with 3-State Outputs							✓		✓			SCBS243
SN74ABT162601	56	18-Bit Universal Bus Transceivers with 3-State Outputs	✓						✓		✓			SCBS247
SN74ABT162823A	56	18-Bit Bus-Interface Flip-Flops with 3-State Outputs							✓		✓			SCBS666
SN74ABT162825	56	18-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs							✓					SCBS474
SN74ABT162827A	56	20-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs							✓		✓			SCBS248
SN74ABT162841	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs							✓		✓			SCBS665

ABTE/ETL

Advanced BiCMOS Technology/ Enhanced Transceiver Logic

ABTE, with wide-noise-margin ETL logic levels on the A port, is backward compatible with existing LVTTTL/TTL logic. ABTE devices support the ANSI/VITA 1-1994 specification (VME64), with tight tolerances for transition times and skew. ABTE is manufactured using the 0.8- μ BiCMOS process and provides A-port drive levels up to 90 mA for incident-wave switching. B-port features include bus-hold circuitry, eliminating the need for external pullup resistors and 25- Ω series output resistors to dampen signal reflections. Other features include a V_{CC} BIAS pin and internal pullup resistors on control pins for live-insertion protection.

The VMEbus International Trade Association (VITA) established a task group in 1997 to specify a synchronous protocol to double data transfer rates to 320 Mbyte/s or more. The new specification, 2eSST (two-edge source synchronous transfer), is based on the asynchronous 2eVME protocol.

Sustained data rates of 1 Gbyte/s, more than ten times faster than traditional VME64 backplanes with single-edge signaling, are possible by taking advantage of the 2eSST use of both edges of each VMEbus clock and the 21-slot VME320 star-configuration backplane.

TI, in conjunction with VITA, is designing a device to support the 2eSST protocol.

See www.ti.com/sc/logic for the most current data sheets and additional information on this new device.

DEVICE SELECTION GUIDE

ABTE/ETL

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			MIL	SSOP	TSSOP	
SN74ABTE16245	48	16-Bit Incident-Wave-Switching Bus Transceivers with 3-State Outputs	✓	✓	✓	SCBS226
SN74ABTE16246	48	11-Bit Incident-Wave-Switching Bus Transceivers with 3-State and Open-Collector Outputs		✓	✓	SCBS227

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)



AC/ACT

Advanced CMOS Logic

TI offers a full family of advanced CMOS logic, with a wide range of AC/ACT devices for low-power and medium- to high-speed applications. Products acquired from Harris Semiconductor provide many additional functions. Over 160 AC and ACT device types are available, including gates, latches, flip-flops, buffers/drivers, counters, multiplexers, transceivers, and registered transceivers. The AC/ACT family is a reliable, low-power logic family, with 24-mA output current drive at 5-V V_{CC} (AC/ACT) and 12-mA output current drive 3.3-V V_{CC} (AC only).

The family includes standard end-pin products and center-pin V_{CC} and ground-configuration products with OEC™ circuitry. The OEC circuitry, available only with the center-pin products, helps reduce simultaneous switching noise associated with high-speed logic. The center-pin products include 16-, 18-, and 20-bit bus-interface functions in the 48- and 56-pin shrink small-outline package (SSOP) and thin shrink small-outline package (TSSOP). These packages allow the designer to double functionality in the same circuit board area or reduce the circuit board area by one-half.

The AC family offers CMOS inputs and outputs, while the ACT family offers TTL inputs with CMOS outputs.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
CD74AC00	14	Quad 2-Input NAND Gates	✓	✓	✓				SCHS223
SN74AC00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓	✓	SCAS524
CD74AC02	14	Quad 2-Input NOR Gates	✓	✓	✓				SCHS224
CD74AC04	14	Hex Inverters	✓	✓	✓				SCHS225
SN74AC04	14	Hex Inverters	✓	✓	✓	✓	✓	✓	SCAS519
CD74AC05	14	Hex Inverters with Open-Drain Outputs	✓	✓	✓				SCHS225
CD74AC08	14	Quad 2-Input AND Gates	✓	✓	✓				SCHS226
SN74AC08	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓	✓	SCAS536
CD74AC10	14	Triple 3-Input NAND Gates		✓	✓				SCHS227
SN74AC10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓	✓	✓	SCAS529
SN74AC11	14	Triple 3-Input AND Gates	✓	✓	✓	✓	✓	✓	SCAS532
CD74AC14	14	Hex Schmitt-Trigger Inverters		✓	✓				SCHS228
SN74AC14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	✓	✓	✓	SCAS522
CD74AC20	14	Dual 4-Input NAND Gates	✓	✓	✓				SCHS229
CD74AC32	14	Quad 2-Input OR Gates	✓	✓	✓				SCHS230
SN74AC32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓	✓	SCAS528
CD74AC74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓				SCHS231
SN74AC74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓	✓	✓	SCAS521
CD74AC86	14	Quad 2-Input Exclusive-OR Gates		✓	✓				SCHS232
SN74AC86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓	✓	✓	SCAS533
CD74AC109	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓				SCHS282
CD74AC112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓				SCHS282
CD74AC138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓				SCHS234
CD74AC139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓				SCHS235
CD74AC151	16	1-of-8 Data Selectors/Multiplexers		✓	✓				SCHS236
CD74AC153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓				SCHS237
CD74AC157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓				SCHS283
CD74AC158	16	Quad 2-to-4 Line Data Selectors/Multiplexers			✓				SCHS283
CD74AC161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓				SCHS239
CD74AC163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓				SCHS284
CD74AC164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓				SCHS240
CD74AC174	16	Hex D-Type Flip-Flops with Clear		✓	✓				SCHS241

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
CD74AC175	16	Quad D-Type Flip-Flops with Clear			✓	✓			SCHS242
CD74AC238	16	3-to-8 Line Decoders/Demultiplexers			✓				SCHS234
CD74AC240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓				SCHS287
SN74AC240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS512
CD74AC241	20	Octal Buffers/Drivers with 3-State Outputs	✓						SCHS287
SN74AC241	20	Octal Buffers/Drivers with 3-State Outputs		✓	✓	✓	✓	✓	SCAS513
CD74AC244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓				SCHS287
SN74AC244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS514
CD74AC245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓		✓		SCHS245
SN74AC245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS461
CD74AC251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs			✓				SCHS246
CD74AC253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs			✓				SCHS247
CD74AC257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓				SCHS248
CD74AC273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓				SCHS249
CD74AC280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓	✓				SCHS250
CD74AC283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓				SCHS251
CD74AC299	20	8-Bit Universal Shift/Storage Registers	✓		✓				SCHS288
CD74AC323	20	8-Bit Universal Shift/Storage Registers			✓				SCHS288
CD74AC373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS289
SN74AC373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS540
CD74AC374	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS290
SN74AC374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS543
SN74AC533	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓	✓	✓	✓	SCAS555
CD74AC534	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs			✓				SCHS290
SN74AC534	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	SCAS554
CD74AC540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs			✓				SCHS285
CD74AC541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓				SCHS285
CD74AC563	20	Octal Inverting Transparent Latches with 3-State Outputs		✓					SCHS291
SN74AC563	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓	✓	✓	✓	SCAS552
SN74AC564	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	SCAS551
CD74AC573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS291
SN74AC573	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓	✓	SCAS542
CD74AC574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓				SCHS292
SN74AC574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS541
CD74AC623	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓			SCHS286
CD74AC646	24	Octal Registered Bus Transceivers with 3-State Outputs	✓		✓				SCHS293
CD74AC652	24	Octal Bus Transceivers and Registers with 3-State Outputs			✓				SCHS294
74AC11000	16	Quad 2-Input NAND Gates		✓	✓	✓			SCLS054
74AC11004	20	Hex Inverters		✓	✓				SCHS033
74AC11008	16	Quad 2-Input AND Gates		✓	✓			✓	SCAS014
74AC11032	16	Quad 2-Input OR Gates		✓	✓	✓			SCAS007
74AC11074	14	Dual D-Type Flip-Flops with Set and Reset		✓	✓	✓	✓	✓	SCAS499
74AC11086	16	Quad 2-Input Exclusive-OR Gates		✓	✓				SCAS081
74AC11138	16	3-to-8 Line Inverting Decoders/Demultiplexers		✓	✓	✓		✓	SCAS042

DEVICE SELECTION GUIDE

AC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
74AC11175	20	Quad D-Type Flip-Flops with Clear		✓	✓				SCAS090
74AC11240	24	Octal Buffers/Drivers with 3-State Outputs		✓	✓		✓		SCAS448
74AC11244	24	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓	✓	SCAS171
74AC11245	24	Octal Bus Transceivers with 3-State Outputs		✓	✓				SCAS010
74AC11257	20	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓		✓	✓	SCAS049
74AC16244	48	16-Bit Buffers/Drivers with 3-State Outputs					✓		SCAS120
74AC16245	48	16-Bit Bus Transceivers with 3-State Outputs					✓		SCAS235
74AC16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs					✓		SCAS121
74AC16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓		SCAS123
74AC16652	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓		SCAS242

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
CD74ACT00	14	Quad 2-Input NAND Gates	✓	✓	✓				SCHS223
SN74ACT00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓	✓	SCAS523
CD74ACT02	14	Quad 2-Input NOR Gates	✓	✓	✓				SCHS224
CD74ACT04	14	Hex Inverters	✓	✓	✓				SCHS225
SN74ACT04	14	Hex Inverters	✓	✓	✓	✓	✓	✓	SCAS518
CD74ACT05	14	Hex Inverters with Open-Drain Outputs	✓	✓	✓				SCHS225
CD74ACT08	14	Quad 2-Input AND Gates	✓	✓	✓				SCHS226
SN74ACT08	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓	✓	SCAS535
CD74ACT10	14	Triple 3-Input NAND Gates		✓	✓				SCHS227
SN74ACT10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓	✓	✓	SCAS526
SN74ACT11	14	Triple 3-Input AND Gates	✓	✓	✓	✓	✓	✓	SCAS531
CD74ACT14	14	Hex Schmitt-Trigger Inverters		✓	✓				SCHS228
SN74ACT14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	✓	✓	✓	SCAS557
CD74ACT20	14	Dual 4-Input NAND Gates	✓	✓	✓				SCHS229
CD74ACT32	14	Quad 2-Input OR Gates	✓	✓	✓				SCHS230
SN74ACT32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓	✓	SCAS530
CD74ACT74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓				SCHS231
SN74ACT74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓	✓	✓	SCAS520
CD74ACT86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓				SCHS232
SN74ACT86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓	✓	✓	SCAS534
CD74ACT109	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓				SCHS233
CD74ACT112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓		✓				SCHS233
CD74ACT138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓				SCHS234
CD74ACT139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓				SCHS235
CD74ACT151	16	1-of-8 Data Selectors/Multiplexers	✓		✓				SCHS236
CD74ACT153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓				SCHS237
CD74ACT157	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓	✓			✓	SCHS283
CD74ACT158	16	Quad 2-to-4 Line Data Selectors/Multiplexers			✓				SCHS238
CD74ACT161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓				SCHS284
CD74ACT163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓				SCHS299
CD74ACT164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓				SCHS240
CD74ACT174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓				SCHS241

commercial package description and availability

DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✦ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

DEVICE SELECTION GUIDE

ACT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
CD74ACT175	16	Quad D-Type Flip-Flops with Clear		✓	✓				SCHS242
CD74ACT238	16	3-to-8 Line Decoders/Demultiplexers		✓					SCHS234
CD74ACT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓				SCHS244
SN74ACT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS515
CD74ACT241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓				SCHS287
SN74ACT241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS516
CD74ACT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓				SCHS287
SN74ACT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS517
CD74ACT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓		✓		SCHS245
SN74ACT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS452
CD74ACT253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓				SCHS247
CD74ACT257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓				SCHS248
CD74ACT258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs			✓				SCHS248
CD74ACT273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓		✓	✓	SCHS249
CD74ACT280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓	✓				SCHS250
CD74ACT283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓				SCHS251
CD74ACT297	16	Digital Phase-Locked Loops			✓				SCHS297
CD74ACT299	20	8-Bit Universal Shift/Storage Registers	✓		✓				SCHS288
CD74ACT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS289
SN74ACT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS544
CD74ACT374	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS290
SN74ACT374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS539
SN74ACT533	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS553
SN74ACT534	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS556
CD74ACT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓				SCHS285
CD74ACT541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓		✓		SCHS285
SN74ACT563	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓	✓	✓	✓	SCAS550
SN74ACT564	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	SCAS549
CD74ACT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SCHS291
SN74ACT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCAS538
CD74ACT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓				SCHS292
SN74ACT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	SCAS537
CD74ACT623	20	Octal Bus Transceivers with 3-State Outputs	✓		✓				SCHS286
CD74ACT646	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓				SCHS293
CD74ACT652	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓	✓				SCHS294
SN74ACT1071	14	10-Bit Bus-Termination Networks with Bus Hold			✓				SCAS192
SN74ACT1073	20	16-Bit Bus-Termination Networks with Bus Hold			✓	✓			SCAS193
SN74ACT1284	20	7-Bit Bus Interfaces with 3-State Outputs			✓	✓	✓	✓	SCAS459
74ACT11000	16	Quad 2-Input NAND Gates		✓	✓	✓			SCAS002
74ACT11004	20	Hex Inverters		✓	✓		✓	✓	SCAS215
74ACT11008	16	Quad 2-Input AND Gates		✓	✓	✓		✓	SCAS013
74ACT11030	14	8-Input NAND Gates		✓	✓				SCLS050
74ACT11032	16	Quad 2-Input OR Gates		✓	✓		✓	✓	SCAS008
74ACT11074	14	Dual D-Type Flip-Flops with Set and Reset		✓	✓	✓	✓		SCAS498

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
74ACT11139	16	Dual 2-to-4 Line Decoders/Demultiplexers			✓			✓	SCAS175
74ACT11240	24	Octal Buffers/Drivers with 3-State Outputs		✓	✓		✓		SCAS210
74ACT11244	24	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓	✓	SCAS006
74ACT11245	24	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓	✓	✓	SCAS031
74ACT11257	20	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓	✓		SCAS053
74ACT11286	14	9-Bit Parity Generators/Checkers with Bus-Driver Parity I/O Port		✓	✓				SCAS069
74ACT11373	24	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓		SCAS015
74ACT11374	24	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓			SCAS217
74ACT11543	28	Octal Registered Transceivers with 3-State Outputs			✓				SCAS136
74ACT11652	28	Octal Bus Transceivers and Registers with 3-State Outputs			✓				SCAS087
74ACT16240	48	16-Bit Buffers/Drivers with 3-State Outputs	✓				✓		SCAS137
74ACT16244	48	16-Bit Buffers/Drivers with 3-State Outputs	✓				✓	✓	SCAS116
74ACT16245	48	16-Bit Bus Transceivers with 3-State Outputs	✓				✓	✓	SCAS097
74ACT16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs	✓				✓		SCAS122
74ACT16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓				✓		SCAS124
74ACT16541	48	16-Bit Buffers/Drivers with 3-State Outputs					✓		SCAS208
74ACT16543	56	16-Bit Registered Transceivers with 3-State Outputs					✓	✓	SCAS126
74ACT16623	48	16-Bit Bus Transceivers with 3-State Outputs					✓		SCAS152
74ACT16646	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓		SCAS127
74ACT16651	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓		SCAS449
74ACT16652	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓		SCAS128
74ACT16657	56	16-Bit Transceivers with Parity Generators/Checkers and 3-State Outputs					✓		SCAS164
74ACT16823	56	18-Bit D-Type Flip-Flops with 3-State Outputs					✓		SCAS160
74ACT16825	56	18-Bit Buffers/Drivers with 3-State Outputs					✓		SCAS155
74ACT16827	56	20-Bit Buffers/Drivers with 3-State Outputs					✓		SCAS163
74ACT16841	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs					✓		SCAS174
74ACT16861	56	20-Bit Bus Transceivers with 3-State Outputs					✓		SCAS197
74ACT16863	56	18-Bit Bus-Interface Transceivers with 3-State Outputs					✓		SCAS162
74ACT16952	56	16-Bit Registered Transceivers with 3-State Outputs					✓		SCAS159

AHC/AHCT

Advanced High-Speed CMOS Logic

The AHC/AHCT logic family provides a natural migration path for HCMOS users who need more speed in low-power, low-noise, and low-drive applications. The AHC logic family consists of basic gates, octals, and 16-bit Widebus™ functions. TI also offers single-gate solutions, designated with 1G in the device name.

Performance characteristics of the AHC family are:

- Speed – Typical propagation delays of 5.2 ns (octals), about three times faster than HC devices. At 5-V V_{CC} , AHC devices are the quick and quiet solution for higher-speed operation.
- Low noise – The AHC family allows designers to combine the low-noise characteristics of HCMOS devices with today's performance levels, without the overshoot and undershoot problems typical of higher-drive devices required to get AHC speeds.
- Low power – The AHC family CMOS technology exhibits low power consumption (40-mA max static current, one-half that of HCMOS).
- Drive – Output-drive current is ± 8 mA at 5-V V_{CC} (AHC/AHCT) and ± 4 mA at 3.3-V V_{CC} (AHC only).
- The AHC family offers CMOS inputs and outputs, while the AHCT family offers TTL inputs with CMOS outputs.
- Packaging – AHC devices are available in small-outline integrated circuit (SOIC), small-outline package (SOP), shrink small-outline package (SSOP), plastic dual in-line package (PDIP), thin shrink small-outline package (TSSOP), thin very small-outline package (TVSOP), and 5-pin small-outline transistor (SOT) package. Selected AHC devices are available in military versions (SN54AHCxx).

Using TI products offers several business advantages:

- Competitive advantage – AHC and competitors' VHC devices have equivalent specifications; therefore, AHC devices are drop-in replacements offering alternate sources. With TI's production capacity, delivery performance, and competitive prices, AHC devices are among the most economical, easy-to-use, and readily available logic products.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AHC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			MIL	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP		TVSOP
SN74AHC1G00	5	Single 2-Input NAND Gates					✓	✓				SCLS313
SN74AHC1G02	5	Single 2-Input NOR Gates					✓	✓				SCLS342
SN74AHC1G04	5	Single Inverters					✓	✓				SCLS318
SN74AHC1GU04	5	Single Inverters					✓	✓				SCLS343
SN74AHC1G08	5	Single 2-Input AND Gates					✓	✓				SCLS314
SN74AHC1G14	5	Single Schmitt-Trigger Inverters					✓	✓				SCLS321
SN74AHC1G32	5	Single 2-Input OR Gates					✓	✓				SCLS317
SN74AHC1G86	5	Single 2-Input Exclusive-OR Gates					✓	✓				SCLS323
SN74AHC1G125	5	Single Bus Buffers with 3-State Outputs					✓	✓				SCLS377
SN74AHC1G126	5	Single Bus Buffers with 3-State Outputs					✓	✓				SCLS379
SN74AHC00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS227
SN74AHC02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS254
SN74AHC04	14	Hex Inverters	✓	✓	✓	✓	✓		✓	✓	✓	SCLS231
SN74AHC04	14	Hex Unbuffered Inverters	✓	✓	✓	✓	✓		✓	✓	✓	SCLS234
SN74AHC05	14	Hex Inverters with Open-Drain Outputs		✓		✓			✓	✓	✓	SCLS357
SN74AHC08	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS236
SN74AHC14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	✓	✓		✓	✓	✓	SCLS238
SN74AHC32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS247
SN74AHC74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓	✓		✓	✓	✓	SCLS255
SN74AHC86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS249
SN74AHC123A	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓		✓			✓	✓	✓	SCLS352
SN74AHC125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓		✓	✓	✓	SCLS256
SN74AHC126	14	Quad Bus Buffers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS257
SN74AHC132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs		✓	✓	✓	✓		✓	✓	✓	SCLS365
SN74AHC138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓	✓		✓	✓	✓	SCLS258
SN74AHC139	16	Dual 2-to-4 Line Decoders/Demultiplexers		✓	✓	✓	✓		✓	✓	✓	SCLS259
SN74AHC157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓	✓		✓	✓	✓	SCLS345
SN74AHC158	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓		✓	✓		✓	✓	✓	SCLS346
SN74AHC174	16	Hex D-Type Flip-Flops with Clear	✓	✓		✓	✓		✓	✓	✓	SCLS425
SN74AHC240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS251
SN74AHC244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS226

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			MIL	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	
SN74AHC245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS230
SN74AHC273	20	Octal D-Type Flip-Flops with Clear	✓	✓		✓			✓	✓	✓	SCLS376
SN74AHC367	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓		✓			✓	✓	✓	SCLS424
SN74AHC373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS235
SN74AHC374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS240
SN74AHC540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS260
SN74AHC541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS261
SN74AHC573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS242
SN74AHC574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS244
SN74AHC594	16	8-Bit Shift Registers with Output Registers		✓		✓	✓		✓	✓		SCLS423
SN74AHC595	16	8-Bit Shift Registers with 3-State Output Registers		✓		✓	✓		✓	✓		SCLS373
SN74AHC4066	14	Quadruple Bilateral Analog Switches		✓		✓			✓	✓	✓	SCLS511
SN74AHC16240	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS326
SN74AHC16244	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS327
SN74AHC16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs							✓	✓	✓	SCLS329
SN74AHC16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs							✓	✓	✓	SCLS330
SN74AHC16540	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS331
SN74AHC16541	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS332

DEVICE SELECTION GUIDE

AHCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			MIL	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP		TVSOP
SN74AHCT1G00	5	Single 2-Input NAND Gates					✓	✓				SCLS316
SN74AHCT1G02	5	Single 2-Input NOR Gates					✓	✓				SCLS341
SN74AHCT1G04	5	Single Inverters					✓	✓				SCLS319
SN74AHCT1G08	5	Single 2-Input AND Gates					✓	✓				SCLS315
SN74AHCT1G14	5	Single Schmitt-Trigger Inverters					✓	✓				SCLS322
SN74AHCT1G32	5	Single 2-Input OR Gates					✓	✓				SCLS320
SN74AHCT1G86	5	Single 2-Input Exclusive-OR Gates					✓	✓				SCLS324
SN74AHCT1G125	5	Single Bus Buffers with 3-State Outputs					✓	✓				SCLS378
SN74AHCT1G126	5	Single Bus Buffers with 3-State Outputs					✓	✓				SCLS380
SN74AHCT00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS229
SN74AHCT02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS262
SN74AHCT04	14	Hex Inverters	✓	✓	✓	✓	✓		✓	✓	✓	SCLS232
SN74AHCT08	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS237
SN74AHCT14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	✓	✓		✓	✓	✓	SCLS246
SN74AHCT32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS248
SN74AHCT74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓	✓		✓	✓	✓	SCLS263
SN74AHCT86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓	✓		✓	✓	✓	SCLS250
SN74AHCT123A	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓		✓			✓	✓	✓	SCLS420
SN74AHCT125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓		✓	✓	✓	SCLS264
SN74AHCT126	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓		✓	✓	✓	SCLS265
SN74AHCT132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs		✓		✓	✓		✓	✓	✓	SCLS366
SN74AHCT138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓		✓	✓		✓	✓	✓	SCLS266
SN74AHCT139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓		✓	✓		✓	✓	✓	SCLS267
SN74AHCT157	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓		✓	✓		✓	✓	✓	SCLS347
SN74AHCT158	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓		✓	✓		✓	✓	✓	SCLS348
SN74AHCT174	16	Hex D-Type Flip-Flops with Clear	✓	✓		✓	✓		✓	✓	✓	SCLS419
SN74AHCT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓		SCLS252
SN74AHCT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS228
SN74AHCT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓		✓	✓	✓	SCLS233
SN74AHCT273	20	Octal D-Type Flip-Flops with Clear		✓		✓	✓		✓	✓	✓	SCLS375
SN74AHCT367	16	Hex Buffers/Line Drivers with 3-State Outputs		✓		✓	✓		✓	✓	✓	SCLS418

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 16/20/24 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			MIL	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	
SN74AHCT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓		✓	✓		✓	✓		SCLS139
SN74AHCT374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS241
SN74AHCT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS268
SN74AHCT541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓		✓	✓		✓	✓		SCLS269
SN74AHCT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓		✓	✓			✓	✓	SCLS243
SN74AHCT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓		✓	✓		✓	✓	✓	SCLS245
SN74AHCT594	16	8-Bit Shift Registers with Output Registers		✓		✓	✓		✓	✓		SCLS417
SN74AHCT595	16	8-Bit Shift Registers with 3-State Output Registers		✓		✓	✓		✓	✓		SCLS374
SN74AHCT16240	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS333
SN74AHCT16244	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS334
SN74AHCT16245	48	16-Bit Bus Transceivers with 3-State Outputs							✓	✓	✓	SCLS335
SN74AHCT16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs							✓	✓	✓	SCLS336
SN74AHCT16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs							✓	✓	✓	SCLS337
SN74AHCT16540	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS338
SN74AHCT16541	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCLS339

ALB

Advanced Low-Voltage BiCMOS Logic

The specially designed 3.3-V ALB family uses 0.6- μ BiCMOS process technology for bus-interface functions. ALB provides 25-mA drive at 3.3 V with maximum propagation delays of 2.2 ns, making it one of TI's fastest logic families. The inputs have clamping diodes to limit overshoot and undershoot.

The ALB family currently is available in two functions with Widebus™ and Shrink Widebus™ footprints, with advanced packaging options such as shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin very small-outline package (TVSOP).

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

ALB

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			SSOP	TSSOP	TVSOP	
SN74ALB16244	48	16-Bit Buffers/Drivers with 3-State Outputs	✓	✓	✓	SCBS647
SN74ALB16245	48	16-Bit Bus Transceivers with 3-State Outputs	✓	✓	✓	SCBS678

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)



ALS

Advanced Low-Power Schottky Logic

The ALS family provides over 140 bipolar logic functions.

This family, combined with the AS family, can be used to optimize systems through performance budgeting. By using AS in speed-critical paths and ALS where speed is less critical, designers can optimize speed and power performance in bipolar designs.

The ALS family includes gates, flip-flops, counters, drivers, transceivers, registered transceivers, readback latches, clock drivers, register files, and multiplexers.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

ALS

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74ALS00A	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓	SDAS187
SN74ALS02A	14	Quad 2-Input NOR Gates	✓	✓	✓	✓		SDAS111
SN74ALS03B	14	Quad 2-Input NAND Gates with Open-Collector Outputs	✓	✓	✓			SDAS013
SN74ALS04B	14	Hex Inverters	✓	✓	✓	✓	✓	SDAS063
SN74ALS05A	14	Hex Inverters with Open-Collector Outputs	✓	✓	✓	✓	✓	SDAS190
SN74ALS08	14	Quad 2-Input AND Gates	✓	✓	✓	✓		SDAS191
SN74ALS09	14	Quad 2-Input AND Gates with Open-Collector Outputs	✓	✓	✓	✓		SDAS084
SN74ALS10A	14	Triple 3-Input NAND Gates	✓	✓	✓	✓		SDAS002
SN74ALS11A	14	Triple 3-Input AND Gates	✓	✓	✓	✓		SDAS009
SN74ALS20A	14	Dual 4-Input NAND Gates	✓	✓	✓	✓	✓	SDAS192
SN74ALS21A	14	Dual 4-Input AND Gates	✓	✓	✓	✓		SDAS085
SN74ALS27A	14	Triple 3-Input NOR Gates	✓	✓	✓	✓		SDAS112
SN74ALS30A	14	8-Input NAND Gates	✓	✓	✓	✓		SDAS010
SN74ALS32	14	Quad 2-Input OR Gates	✓	✓	✓	✓		SDAS113
SN74ALS33A	14	Quad 2-Input NOR Gates	✓	✓	✓			SDAS034
SN74ALS35A	14	Hex Noninverters with Open-Collector Outputs		✓	✓			SDAS011
SN74ALS37A	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDAS195
SN74ALS38B	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDAS196
SN74ALS74A	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓		SDAS143
SN74ALS86	14	Quad 2-Input Exclusive-OR Gate	✓	✓	✓	✓		SDAS006
SN74ALS109A	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓	✓		SDAS198
SN74ALS112A	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓		SDAS199
SN74ALS133	16	13-Input NAND Gates	✓	✓	✓	✓		SDAS202
SN74ALS137A	16	3-to-8 Line Decoders/Demultiplexers with Address Latches	✓	✓	✓	✓		SDAS203
SN74ALS138A	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓		SDAS055
SN74ALS139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓	✓		SDAS204
SN74ALS151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓	✓		SDAS205
SN74ALS153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓	✓		SDAS206
SN74ALS156	16	Dual 2-to-4 Line Decoders/Demultiplexers with Open-Collector Outputs		✓	✓			SDAS099
SN74ALS157A	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		SDAS081
SN74ALS158	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		SDAS081
SN74ALS161B	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		SDAS024

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74ALS163B	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓	✓	SDAS024
SN74ALS164A	14	8-Bit Serial-In, Parallel-Out Shift Registers		✓	✓	✓		SDAS159
SN74ALS165	16	8-Bit Parallel-In, Serial-Out Shift Registers	✓	✓	✓			SDAS157
SN74ALS166	16	8-Bit Parallel-Load Shift Registers		✓	✓	✓	✓	SDAS156
SN74ALS169B	16	Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDAS125
SN74ALS174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDAS207
SN74ALS175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDAS207
SN74ALS191A	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDAS210
SN54ALS193	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓					Call
SN74ALS193A	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDAS211
SN74ALS240A	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDAS214
SN74ALS240A-1	20	Octal Buffers/Drivers with 3-State Outputs		✓	✓	✓	✓	SDAS214
SN74ALS241C	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDAS153
SN74ALS243A	14	Quad Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS069
SN74ALS244C	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDAS142
SN74ALS244C-1	20	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓		SDAS142
SN74ALS245A	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	SDAS272
SN74ALS245A-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS272
SN74ALS251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDAS215
SN74ALS253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDAS216
SN74ALS257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓					SDAS124
SN74ALS257A	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDAS124
SN74ALS258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓					SDAS124
SN74ALS258A	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDAS124
SN74ALS259	16	8-Bit Addressable Latches	✓	✓	✓			SDAS217
SN74ALS273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDAS218
SN74ALS280	14	9-Bit Odd/Even Parity Generators/Checkers		✓	✓			SDAS038
SN74ALS299	20	8-Bit Universal Shift/Storage Registers	✓	✓	✓			SDAS220
SN74ALS323	20	8-Bit Universal Shift/Storage Registers	✓	✓	✓	✓		SDAS267
SN74ALS373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓					SDAS083
SN74ALS373A	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓	SDAS083
SN74ALS374A	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	SDAS167
SN74ALS518	20	8-Bit Identity Comparators (P = Q) with Open-Collector Outputs and Input Pullup Resistors		✓	✓	✓		SDAS224
SN74ALS520	20	8-Bit Identity Comparators (P = Q) with Input Pullup Resistors	✓	✓	✓	✓		SDAS224
SN74ALS521	20	8-Bit Identity Comparators (P = Q)		✓	✓	✓		SDAS224
SN74ALS533A	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓	✓		SDAS270
SN74ALS534A	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS168
SN74ALS540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓		SDAS025
SN74ALS540-1	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓	SDAS025
SN74ALS541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDAS025
SN74ALS541-1	20	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓			SDAS025
SN74ALS561A	20	Octal Bus Transceivers and Registers with 3-State Outputs	✓	✓	✓	✓		SDAS225
SN74ALS563B	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓	✓	✓		SDAS163

DEVICE SELECTION GUIDE

ALS

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74ALS564B	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS164
SN74ALS569A	20	Synchronous 4-Bit Binary Counters with 3-State Outputs	✓	✓	✓	✓		SDAS229
SN74ALS573C	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	SDAS048
SN74ALS574B	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS165
SN74ALS575A	24	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓			SDAS165
SN74ALS576B	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS065
SN74ALS577A	24	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓		SDAS065
SN74ALS580B	20	Octal D-Type Transparent Latches with 3-State Outputs	✓	✓	✓	✓		SDAS277
SN74ALS620A	20	Octal Bus Transceivers with 3-State Outputs		✓	✓			SDAS226
SN74ALS621A	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓			SDAS226
SN74ALS621A-1	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDAS226
SN74ALS623A	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS226
SN74ALS638A	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS123
SN74ALS638A-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS123
SN74ALS639A	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS123
SN74ALS640B	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS122
SN74ALS640B-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS122
SN74ALS641A	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDAS300
SN74ALS641A-1	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDAS300
SN74ALS642A	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓			SDAS300
SN74ALS642A-1	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDAS300
SN74ALS645A	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS278
SN74ALS645A-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDAS278
SN74ALS648A	24	Octal Registered Bus Transceivers with 3-State Outputs	✓	✓	✓			SDAS039
SN74ALS653	24	Octal Bus Transceivers and Registers with Open-Collector and 3-State Outputs		✓	✓			SDAS066
SN74ALS654	24	Octal Bus Transceivers and Registers with Open-Collector and 3-State Outputs		✓	✓			SDAS066
SN74ALS666	24	8-Bit D-Type Transparent Read-Back Latches with 3-State Outputs		✓	✓	✓		SDAS227
SN74ALS667	24	8-Bit D-Type Transparent Read-Back Latches with 3-State Outputs		✓	✓	✓		SDAS227
SN74ALS679	20	12-Bit Address Comparators		✓	✓	✓		SDAS003
SN74ALS688	20	8-Bit Magnitude Comparators	✓	✓	✓	✓		SDAS228
SN74ALS746	20	Octal Buffers and Line Drivers with Input Pullup Resistors and 3-State Outputs		✓	✓			SDAS052
SN74ALS760	20	Octal Buffers and Line Drivers with Open-Collector Outputs		✓	✓			SDAS141
SN74ALS804A	20	Hex 2-Input NAND Drivers	✓	✓	✓			SDAS022
SN74ALS805A	20	Hex 2-Input NOR Drivers	✓	✓	✓			SDAS023
SN74ALS832A	20	Hex 2-Input OR Drivers	✓	✓	✓			SDAS017
SN74ALS841	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓	✓			SDAS059
SN74ALS843	24	9-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓	✓			SDAS232
SN74ALS845	24	8-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓	✓			SDAS233
SN74ALS857	24	Hex 2-to-1 Universal Multiplexers with 3-State Outputs	✓	✓	✓			SDAS170
SN74ALS867A	24	Synchronous 8-Bit Up/Down Counters		✓	✓			SDAS115
SN74ALS869	24	Synchronous 8-Bit Up/Down Counters		✓	✓			SDAS115
SN74ALS870	24	Dual 16-by-4 Register Files		✓	✓	✓		SDAS139
SN74ALS873B	24	Dual 4-Bit D-Type Latches with 3-State Outputs	✓	✓	✓			SDAS036
SN74ALS874B	24	Dual 4-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS061

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74ALS876A	24	Dual 4-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓			SDAS061
SN74ALS990	20	8-Bit D-Type Transparent Read-Back Latches		✓	✓			SDAS027
SN74ALS992	24	9-Bit D-Type Transparent Read-Back Latches with 3-State Outputs		✓	✓			SDAS028
SN74ALS994	24	10-Bit D-Type Transparent Read-Back Latches		✓	✓			SDAS237
SN74ALS996	24	8-Bit Edge-Triggered Read-Back Latches	✓	✓	✓			SDAS098
SN74ALS996-1	24	8-Bit Edge-Triggered Read-Back Latches		✓	✓			SDAS098
SN74ALS1004	14	Hex Inverting Drivers		✓	✓	✓		SDAS074
SN74ALS1005	14	Hex Inverting Buffers with Open-Collector Outputs	✓	✓	✓	✓		SDAS240
SN74ALS1034	14	Hex Drivers	✓	✓	✓	✓		SDAS053
SN74ALS1035	14	Hex Noninverting Buffers with Open-Collector Outputs	✓	✓	✓	✓		SDAS243
SN74ALS1244A	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓			SDAS186
SN74ALS1245A	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS245
SN74ALS1640A	20	Octal Bus Transceivers with 3-State Outputs		✓				SDAS246
SN74ALS1645A	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS246
SN74ALS2240	20	Octal Buffers and Line/MOS Drivers with 3-State Outputs and Series Damping Resistors	✓	✓	✓			SDAS268
SN74ALS2541	20	Octal Line Drivers/MOS Drivers with 3-State Outputs	✓	✓	✓			SDAS273
SN74ALS29821	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS145
SN74ALS29823	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS146
SN74ALS29827	24	10-Bit Buffers/Drivers with 3-State Outputs		✓	✓			SDAS095
SN74ALS29828	24	10-Bit Buffers/Drivers with 3-State Outputs		✓	✓			SDAS095
SN74ALS29833	24	8-Bit to 9-Bit Parity Bus Transceivers		✓	✓			SDAS119
SN74ALS29854	24	8-Bit to 9-Bit Parity Bus Transceivers		✓	✓			SDAS118
SN74ALS29863	24	9-Bit Bus Transceivers with 3-State Outputs		✓	✓			SDAS096

ALVC

Advanced Low-Voltage CMOS Technology Logic

One of the highest-performance 3.3-V bus-interface families is the ALVC family. These specially designed 3-V products are processed in 0.6- μ CMOS technology, with typical propagation delays of less than 3 ns, current drive of 24 mA, and static current of 40 μ A for bus-interface functions. ALVC devices have input bus-hold cells to eliminate the need for external pullup resistors for floating inputs. With over 90 Widebus™ and Widebus+™ devices with series damping resistors and gates and octals on the roadmap, ALVC quickly is becoming the industry standard for many 3.3-V logic applications. The family also features innovative functions that make it ideal for memory interleaving, multiplexing, and interfacing to SDRAMs.

Selected devices in the ALVC family are offered in Widebus footprints with all of the advanced packaging, such as shrink small-outline package (SSOP) and thin shrink small-outline package (TSSOP).

Selected ALVC devices are offered in MicroStar BGA™ (LFBGA) and MicroStar Jr.™ (VFBGA) packages. Other devices are offered in the plastic dual-in-line package (PDIP), quad flatpack no-lead (QFN) package, small-outline integrated circuit (SOIC) package, small-outline package (SOP), SSOP, TSSOP, and thin very small-outline package (TVSOP).

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

ALVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			LFBGA	PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
Gates and Octals												
SN74ALVC00	14	Quad 2-Input NAND Gates				✓	✓		✓	✓		SCES115
SN74ALVC04	14	Hex Inverters			✓	✓	✓		✓	✓		SCES117
SN74ALVC08	14	Quad 2-Input AND Gates			✓	✓	✓		✓	✓		SCES101
SN74ALVC10	14	Triple 3-Input NAND Gates				✓	✓		✓	✓		SCES106
SN74ALVC14	14	Hex Schmitt-Trigger Inverters				✓		✓	✓	✓		SCES107
SN74ALVC32	14	Quad 2-Input OR Gates				✓			✓	✓		SCES108
SN74ALVC125	14	Quad Bus Buffers with 3-State Outputs				✓	✓		✓	✓		SCES110
SN74ALVC126	14	Quad Bus Buffers with 3-State Outputs				✓	✓		✓	✓		SCES111
SN74ALVC244	20	Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓		✓	✓		SCES188
SN74ALVCH244	20	Octal Buffers and Line Drivers with 3-State Outputs				✓	✓		✓	✓		SCES112
SN74ALVC245	20	Octal Bus Transceivers with 3-State Outputs			✓	✓	✓		✓	✓		SCES271
SN74ALVCH245	20	Octal Bus Transceivers with 3-State Outputs				✓	✓		✓	✓		SCES119
SN74ALVCH373	20	Octal Transparent D-Type Latches with 3-State Outputs				✓			✓	✓	✓	SCES116
SN74ALVCH374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓		✓		✓	✓	✓		SCES118
Widebus™ Devices												
SN74ALVCH16240	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓		SCES045
SN74ALVC16244A	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCAS250
SN74ALVCH16244	48	16-Bit Buffers/Drivers with 3-State Outputs							✓	✓	✓	SCES014
SN74ALVCH16245	48	16-Bit Bus Transceivers with 3-State Outputs							✓	✓	✓	SCAS015
SN74ALVCHR16245	48	16-Bit Bus Transceivers with 3-State Outputs							✓	✓	✓	SCES064
SN74ALVCH16260	56	12-Bit to 24-Bit Multiplexed D-Type Latches with 3-State Outputs							✓	✓		SCES046
SN74ALVCH16269	56	12-Bit to 24-Bit Registered Bus Exchangers with 3-State Outputs							✓	✓	✓	SCES019

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			LFBGA	PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP	VFBGA	
SN74ALVCHR16269A	56	12-Bit to 24-Bit Registered Bus Exchangers with 3-State Outputs						✓	✓	✓		SCES050
SN74ALVCH16270	56	12-Bit to 24-Bit Registered Bus Exchangers with 3-State Outputs						✓	✓			SCES028
SN74ALVCH16271	56	12-Bit to 24-Bit Multiplexed Bus Exchangers with 3-State Outputs						✓	✓			SCES017
SN74ALVCH16282	80	18-Bit to 36-Bit Registered Bus Exchangers with 3-State Outputs								✓		SCES036
SN74ALVC16334	48	16-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES128
SN74ALVCH16334	48	16-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES090
SN74ALVCH16344	56	1-Bit to 4-Bit Address Drivers with 3-State Outputs						✓	✓			SCES054
SN74ALVCH16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs						✓	✓		✓	SCES020
SN74ALVCH16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs						✓	✓		✓	SCES021
SN74ALVCH16409	56	9-Bit 4-Port Universal Bus Exchangers with 3-State Outputs						✓	✓			SCES022
SN74ALVCHR16409	56	9-Bit 4-Port Universal Bus Exchangers with 3-State Outputs						✓	✓			SCES056
SN74ALVCH16500	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓			SCES023
SN74ALVCH16501	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓		✓	SCES024
SN74ALVCH16524	56	18-Bit Registered Bus Transceivers with 3-State Outputs						✓	✓			SCES080
SN74ALVCH16525	56	18-Bit Registered Bus Transceivers with 3-State Outputs						✓	✓			SCES059
SN74ALVCH16543	56	16-Bit Registered Transceivers with 3-State Outputs						✓	✓			SCES025
SN74ALVCH16600	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓			SCES030
SN74ALVCH16601	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓			SCES027
SN74ALVCHR16601	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓			SCES123
SN74ALVCH16646	56	16-Bit Bus Transceivers and Registers with 3-State Outputs						✓	✓	✓		SCES032
SN74ALVCH16721	56	20-Bit D-Type Flip-Flops with 3-State Outputs						✓	✓	✓		SCES052
SN74ALVCH16820	56	10-Bit D-Type Flip-Flops with Dual Outputs and 3-State Outputs						✓	✓			SCES035
SN74ALVCH16821	56	20-Bit D-Type Flip-Flops with 3-State Outputs						✓	✓			SCES037
SN74ALVCH16823	56	18-Bit D-Type Flip-Flops with 3-State Outputs						✓	✓			SCES038
SN74ALVCH16825	56	18-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCES039

DEVICE SELECTION GUIDE

ALVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			LFBGA	PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
SN74ALVCH16827	56	20-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCES041
SN74ALVCH16831	80	1-to-4 Address Registers/Drivers with 3-State Outputs								✓		SCES083
SN74ALVCH16832	64	1-to-4 Address Registers/Drivers with 3-State Outputs							✓			SCES098
SN74ALVC16834	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓	✓	SCES140
SN74ALVC16835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓	✓	SCES125
SN74ALVCH16835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓	✓	SCES053
SN74ALVCH16841	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs						✓	✓			SCES043
SN74ALVCH16863	56	18-Bit Bus-Interface Transceivers with 3-State Outputs						✓	✓			SCES060
SN74ALVCH16901	64	18-Bit Universal Bus Transceivers with Parity Generators/Checkers							✓			SCES010
SN74ALVCH16903	56	12-Bit Universal Bus Drivers with Parity Checker and Dual 3-State Outputs						✓	✓	✓		SCES095
SN74ALVCH16952	56	16-Bit Registered Transceivers with 3-State Outputs						✓	✓	✓		SCES011
SN74ALVCH16973	48	8-Bit Bus Transceivers and Transparent D-Type Latches with Four Independent Buffers						✓	✓	✓		SCES435
Widebus+™ Devices												
SN74ALVCH32244	96	32-Bit Buffers/Drivers with 3-State Outputs	✓									SCES281
SN74ALVCH32245	96	32-Bit Bus Transceivers with 3-State Outputs	✓									SCES282
SN74ALVCH32374	96	32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓									SCES283
SN74ALVCH32501	114	32-Bit Universal Bus Transceivers with 3-State Outputs	✓									SCES144
SN74ALVCH32973	96	16-Bit Bus Transceivers and Transparent D-Type Latches with Eight Independent Buffers	✓									SCES436
Widebus™ Devices With Series Damping Resistors												
SN74ALVCH162244	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓			SCES065
SN74ALVCH162260	56	12-Bit to 24-Bit Multiplexed D-Type Latches with Series Damping Resistors and 3-State Outputs						✓	✓			SCES570
SN74ALVCH162268	56	12-Bit to 24-Bit Registered Bus Exchangers with 3-State Outputs						✓	✓		✓	SCES018
SN74ALVCHG162280	80	16-Bit to 32-Bit Bus Exchangers with Byte Masks and 3-State Outputs								✓		SCES093
SN74ALVCHG162282	80	18-Bit to 36-Bit Registered Bus Exchangers with 3-State Outputs								✓		SCES094

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			LFPGA	PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
SN74ALVC162334	48	16-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES127
SN74ALVCH162334	48	16-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES120
SN74ALVCH162344	56	1-Bit to 4-Bit Address Drivers with 3-State Outputs						✓	✓	✓		SCES085
SN74ALVCH162373	48	16-Bit Transparent D-Type Latches with 3-State Outputs						✓	✓		✓	SCES583
SN74ALVCH162374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs						✓	✓			SCES092
SN74ALVCH162409	56	9-Bit 4-Port Universal Bus Exchangers with 3-State Outputs						✓				SCES189
SN74ALVCH162525	56	18-Bit Registered Transceivers with 3-State Outputs						✓	✓			SCES058
SN74ALVCH162601	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓			SCES026
SN74ALVCH162721	56	20-Bit Flip-Flops with 3-State Outputs						✓	✓			SCES055
SN74ALVCH162820	56	10-Bit Flip-Flops with Dual Outputs and 3-State Outputs						✓	✓			SCES012
SN74ALVCH162827	56	20-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓	✓		SCES013
SN74ALVCH162830	80	1-Bit to 2-Bit Address Drivers with 3-State Outputs									✓	SCES082
SN74ALVCHS162830	80	1-Bit to 2-Bit Address Drivers with 3-State Outputs									✓	SCES097
SN74ALVCHS162830A	80	1-Bit to 2-Bit Address Drivers with 3-State Outputs	✓									SCES624
SN74ALVC162831	80	1-Bit to 4-Bit Address Registers/Drivers with 3-State Outputs									✓	SCES605
SN74ALVCH162831	80	1-Bit to 4-Bit Address Registers/Drivers with 3-State Outputs									✓	SCES084
SN74ALVCH162832	64	1-Bit to 4-Bit Address Registers/Drivers with 3-State Outputs								✓		SCES588
SN74ALVC162834	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES172
SN74ALVCF162834	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES409
SN74ALVC162835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES126
SN74ALVCF162835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES397
SN74ALVCH162835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES121
SN74ALVC162836	56	20-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES129
SN74ALVCH162836	56	20-Bit Universal Bus Drivers with 3-State Outputs						✓	✓	✓		SCES122
SN74ALVCH162841	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs						✓	✓			SCES088

DEVICE SELECTION GUIDE

ALVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			LFBGA	PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP	VFBGA	
Widebus™ Devices With Level Shifter												
SN74ALVC164245	48	16-Bit 3.3-V to-5-V Level-Shifting Transceivers with 3-State Outputs						✓	✓		✓	SCES416

ALVT

Advanced Low-Voltage BiCMOS Technology Logic

ALVT is a 5-V-tolerant, 3.3-V and 2.5-V product using 0.6- μ BiCMOS technology for advanced bus-interface functions. ALVT provides superior performance, up to 28% speed improvement compared to similar LVT at 3.3 V, current drive of 64 mA, and pin-for-pin compatibility with existing ABT and LVT families.

ALVT operates at LVTTTL signal levels in telecom and networking high-performance system point-to-point or distributed-load backplane applications. ALVT is an excellent migration path from ABT or LVT.

Performance characteristics of the ALVT family include:

- 3.3-V or 2.5-V operation, with 5-V-tolerant I/O capability for use in a mixed-voltage environment
- Speed – Provides high performance, with up to 28% speed improvement over LVT
- Drive – Provides up to 64 mA of drive at 3.3-V V_{CC} and 24 mA at 2.5-V V_{CC} , yet consumes less than 330 μ W of standby power

Additional features include:

- Live insertion – ALVT devices incorporate I_{off} and power-up 3-state (PU3S) circuitry to protect the devices in live-insertion applications and make them ideally suited for hot-insertion applications. I_{off} prevents the devices from being damaged during partial power down, and PU3S forces the outputs to the high-impedance state during power up and power down.
- Bus hold – Eliminates floating inputs by holding them at the last valid logic state, eliminating the need for external pullup and pulldown resistors
- Damping-resistor option – TI implements series damping resistors on selected devices, reducing overshoot and undershoot, matching line impedance, and minimizing ringing.
- Packaging – ALVT devices are available in shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin very small-outline package (TVSOP), with selected devices offered in MicroStar BGA™ (LFBGA) and MicroStar Jr.™ (VFBGA) packages.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

ALVT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			LFBGA	SSOP	TSSOP	TVSOP	VFBGA	
SN74ALVTH16240	48	2.5-V/3.3-V 16-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓		SCES138
SN74ALVTH16244	48	2.5-V/3.3-V 16-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓	✓	SCES070
SN74ALVTH16245	48	2.5-V/3.3-V 16-Bit Bus Transceivers with 3-State Outputs		✓	✓	✓	✓	SCES066
SN74ALVTHR16245	48	2.5-V/3.3-V 16-Bit Bus Transceivers with 3-State Outputs		✓	✓	✓	✓	SCES075
SN74ALVTH16373	48	2.5-V/3.3-V 16-Bit Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓	SCES067
SN74ALVTH16374	48	2.5-V/3.3-V 16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓	✓	SCES068
SN74ALVTH16601	56	2.5-V/3.3-V 18-Bit Universal Bus Transceivers with 3-State Outputs		✓	✓	✓		SCES143
SN74ALVTH16821	56	2.5-V/3.3-V 20-Bit D-Type Flip-Flops with 3-State Outputs		✓	✓	✓		SCES078
SN74ALVTH16827	56	2.5-V/3.3-V 20-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓		SCES076
SN74ALVTH32244	96	2.5-V/3.3-V 32-Bit Buffers/Drivers with 3-State Outputs	✓					SCES279
SN74ALVTH32373	96	2.5-V/3.3-V 32-Bit Transparent D-Type Latches with 3-State Outputs	✓					SCES322
SN74ALVTH32374	96	2.5-V/3.3-V 32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓					SCES280
SN74ALVTH162244	48	2.5-V/3.3-V 16-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓		SCES074
SN74ALVTH162245	48	2.5-V/3.3-V 16-Bit Bus Transceivers with 3-State Outputs		✓	✓	✓		SCES331
SN74ALVTH162827	56	2.5-V/3.3-V 20-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓		SCES079

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

AS

Advanced Schottky Logic

The AS family of high-performance bipolar logic includes over 70 functions that offer high drive capabilities.

This family, combined with the ALS family, can be used to optimize system speed and power through performance budgeting where BiCMOS logic is used. By using AS in speed-critical paths and ALS where speed is less critical, designers can optimize speed and power performance.

The AS family includes gates, flip-flops, counters, drivers, transceivers, registered transceivers, readback latches, clock drivers, register files, and multiplexers.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AS

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74AS00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDAS187
SN74AS02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓		SDAS111
SN74AS04	14	Hex Inverters	✓	✓	✓	✓		SDAS063
SN74AS08	14	Quad 2-Input AND Gates	✓	✓	✓	✓		SDAS191
SN74AS10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓		SDAS002
SN74AS11	14	Triple 3-Input AND Gates	✓	✓	✓	✓		SDAS009
SN74AS20	14	Dual 4-Input NAND Gates	✓	✓	✓	✓		SDAS192
SN74AS21	14	Dual 4-Input AND Gates		✓	✓	✓		SDAS085
SN74AS27	14	Triple 3-Input NOR Gates	✓	✓	✓			SDAS112
SN74AS30	14	8-Input NAND Gates	✓	✓	✓	✓		SDAS010
SN74AS32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓	SDAS113
SN74AS74A	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓		SDAS143
SN74AS86A	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓			SDAS006
SN74AS109A	16	Dual Positive-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓		SDAS198
SN74AS138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓		SDAS055
SN74AS151	16	1-of-8 Data Selectors/Multiplexers		✓	✓	✓		SDAS205
SN74AS153	16	Dual 1-of-4 Data Selectors/Multiplexers		✓	✓	✓		SDAS206
SN74AS157	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓	✓	✓		SDAS081
SN74AS158	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓	✓	✓		SDAS081
SN74AS161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		SDAS024
SN74AS163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		SDAS024
SN74AS169A	16	Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓			SDAS125
SN74AS174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDAS207
SN74AS175B	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDAS207
SN74AS181A	24	Arithmetic Logic Units/Function Generators	✓	✓	✓			SDAS209
SN74AS194	16	4-Bit Bidirectional Universal Shift Registers	✓	✓	✓			SDAS212
SN74AS240A	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDAS214
SN74AS241A	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDAS153
SN74AS244A	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓		SDAS142
SN74AS245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS272
SN74AS250A	24	1-of-16 Data Generators/Multiplexers with 3-State Outputs	✓	✓	✓			SDAS137
SN74AS253A	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs		✓	✓			SDAS216

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74AS257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDAS124
SN74AS258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDAS124
SN74AS280	14	9-Bit Odd/Even Parity Generators/Checkers		✓	✓	✓		SDAS038
SN74AS286	14	9-Bit Parity Generators/Checkers with Bus-Driver Parity I/O Port	✓	✓	✓	✓		SDAS050
SN74AS298A	16	Quad 2-Input Multiplexers with Storage		✓	✓	✓		SDAS219
SN74AS373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓		SDAS083
SN74AS374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDAS167
SN74AS533A	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓			SDAS270
SN74AS573A	20	Octal D-Type Transparent Latches with 3-State Outputs	✓	✓	✓			SDAS048
SN74AS574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS165
SN74AS575	24	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS165
SN74AS576	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS065
SN74AS638A	20	Octal Bus Transceivers		✓	✓			SDAS123
SN74AS640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDAS122
SN74AS641	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓			SDAS300
SN74AS645	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓			SDAS278
SN74AS648	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓			SDAS039
SN74AS756	20	Octal Buffers and Line Drivers with Open-Collector Outputs	✓	✓	✓			SDAS040
SN74AS757	20	Octal Buffers and Line Drivers with Open-Collector Outputs		✓	✓	✓		SDAS040
SN74AS760	20	Octal Buffers and Line Drivers with Open-Collector Outputs	✓	✓	✓	✓		SDAS141
SN74AS804B	20	Hex 2-Input NAND Drivers	✓	✓	✓			SDAS022
SN74AS805B	20	Hex 2-Input NOR Drivers	✓	✓	✓			SDAS023
SN74AS808B	20	Hex 2-Input NOR Drivers	✓	✓	✓			SDAS018
SN74AS821A	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS230
SN74AS823A	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS231
SN74AS825A	24	8-Bit Bus-Interface Flip-Flops with 3-State Outputs	✓	✓	✓			SDAS020
SN74AS832B	20	Hex 2-Input OR Drivers	✓	✓	✓			SDAS017
SN74AS841A	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓	✓			SDAS059
SN74AS867	24	Synchronous 8-Bit Up/Down Counters	✓	✓	✓			SDAS115
SN74AS869	24	Synchronous 8-Bit Up/Down Counters	✓	✓	✓			SDAS115
SN74AS873A	24	Dual 4-Bit D-Type Latches with 3-State Outputs	✓	✓	✓			SDAS036
SN74AS874	24	Dual 4-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓			SDAS061
SN74AS876	24	Dual 4-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓			SDAS061
SN74AS885	24	8-Bit Magnitude Comparators	✓	✓	✓			SDAS236
SN74AS1000A	14	Quad 2-Input NAND Buffers/Drivers	✓	✓	✓	✓		SDAS056
SN74AS1004A	14	Hex Inverting Drivers	✓	✓	✓	✓		SDAS074
SN74AS1008A	14	Quad 2-Input AND Buffers/Drivers		✓	✓			SDAS071
SN74AS1032A	14	Quad 2-Input OR Buffers/Drivers	✓	✓	✓			SDAS072
SN74AS1034A	14	Hex Drivers	✓	✓	✓	✓		SDAS053
SN74AS1804	20	Hex 2-Input NAND Drivers		✓				SDAS042
SN74AS4374B	20	Octal Edge-Triggered D-Type Dual-Rank Flip-Flops with 3-State Outputs		✓	✓	✓		SDAS109
SN74AS8003	8	Dual 2-Input Positive-NAND Gates				✓		SDAS305

AUC

Advanced Ultra-Low-Voltage CMOS Logic

AUC is the industry's first logic family that is optimized for 1.8 V, with operation from sub 1 V (0.8 V) to 2.5 V and the inputs are tolerant to 3.6 V.

This family meets a variety of demands that have been placed on digital electronic designs, including the move to lower supply voltages, faster speeds, smaller form factors, and lower power consumption, without compromising signal integrity. AUC was developed to meet the design parameters for advanced systems, such as telecommunications equipment, high-performance workstations, PC and networking servers, and next-generation portable consumer electronics.

As designers convert the core processors, ASICs, and memories of designs to lower voltages, they need the supporting low-voltage logic functions. AUC provides this support.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AUC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
SN74AUC1G00	5	Single 2-Input Positive-NAND Gates	✓			✓						SCES368
SN74AUC1G02	5	Single 2-Input Positive-NOR Gates	✓			✓						SCES369
SN74AUC1G04	5	Single Inverter Gates	✓			✓						SCES370
SN74AUC1GU04	5	Single Inverter Gates	✓			✓						SCES371
SN74AUC1G06	5	Single Inverter Buffers/Drivers with Open-Drain Outputs	✓			✓						SCES372
SN74AUC1G07	5	Single Buffers/Drivers with Open-Drain Outputs	✓			✓						SCES373
SN74AUC1G08	5	Single 2-Input Positive-AND Gates	✓			✓						SCES374
SN74AUC1G10	6	Single 3-Input Positive-NAND Gates	✚			✚						Call
SN74AUC1G11	6	Single 3-Input Positive-AND Gates	✚			✚						Call
SN74AUC1G14	5	Single Schmitt-Trigger Inverters	✓			✓						SCES375
SN74AUC1G17	5	Single Schmitt-Trigger Buffers	✓			✓						SCES376
SN74AUC1G18	6	1-of-2 Noninverting Demultiplexers with 3-State Deselected Output	✚			✚						Call
SN74AUC1G19	6	1-of-2 Decoders/Demultiplexers	✓			✓						SCES626
SN74AUC1G27	6	Single 3-Input Positive-NOR Gates	✚			✚						Call
SN74AUC1G32	5	Single Input Positive-OR Gates	✓			✓						SCES377
SN74AUC1G57	6	Configurable Multiple-Function Gates	✚			✚						Call
SN74AUC1G58	6	Configurable Multiple-Function Gates	✚			✚						Call
SN74AUC1G66	5	Single Bilateral Analog Switches	✓			✓						SCES386
SN74AUC1G74	8	Single Edge-Triggered D-Type Flip-Flops with Preset and Clear	✓				✓				✓	SCES537
SN74AUC1G79	5	Single Positive-Edge-Triggered D-Type Flip-Flops	✓			✓						SCES387
SN74AUC1G80	5	Single Positive-Edge-Triggered D-Type Flip-Flops	✓			✓						SCES388
SN74AUC1G86	5	Single 2-Input Exclusive-OR Gates	✓			✓						SCES389
SN74AUC1G97	6	Configurable Multiple-Function Gates	✚			✚						Call
SN74AUC1G98	6	Configurable Multiple-Function Gates	✚			✚						Call
SN74AUC1G125	5	Single Bus Buffer Gates with 3-State Outputs	✓			✓						SCES382
SN74AUC1G126	5	Single Bus Buffer Gates with 3-State Outputs	✓			✓						SCES383

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)



DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
SN74AUC1G240	5	Single Buffers/Drivers with 3-State Outputs	✓			✓						SCES384
SN74AUC1G332	6	Single 3-Input Positive-OR Gates	+			+						Call
SN74AUC1G386	6	Single 3-Input Positive-XOR Gates	+			+						Call
SN74AUC2G00	8	Dual 2-Input NAND Gates	✓				✓				✓	SCES440
SN74AUC2G02	8	Dual 2-Input NOR Gates	✓				✓				✓	SCES441
SN74AUC2G04	6	Dual Inverters	✓			✓						SCES437
SN74AUC2GU04	6	Dual Inverters	✓			✓						SCES438
SN74AUC2G06	6	Dual Inverter Buffers/Drivers with Open-Drain Outputs	✓			✓						SCES442
SN74AUC2G07	6	Dual Buffers/Drivers with Open-Drain Outputs	✓			✓						SCES443
SN74AUC2G08	8	Dual 2-Input AND Gates	✓				+				+	Call
SN74AUC2G14	6	Dual Schmitt-Trigger Inverters	+			+						Call
SN74AUC2G17	6	Dual Schmitt-Trigger Buffers	+			+						Call
SN74AUC2G32	8	Dual 2-Input OR Gates	✓				✓				✓	SCES478
SN74AUC2G34	6	Dual Buffer Gates	✓			✓						SCES514
SN74AUC2G53	8	Analog Multiplexers/Demultiplexers	✓				✓				✓	SCES484
SN74AUC2G66	8	Dual Bilateral Switches	✓				✓				✓	SCES507
SN74AUC2G74	8	Dual Edge-Triggered D-Type Flip-Flops with Clear and Preset	+				+				+	Call
SN74AUC2G79	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓				✓				✓	SCES536
SN74AUC2G80	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓				✓				✓	SCES540
SN74AUC2G86	8	Dual 2-Input Exclusive-OR Gates	✓				✓				✓	SCES479
SN74AUC2G125	8	Dual Bus Buffer Gates with 3-State Outputs	✓				✓				✓	SCES532
SN74AUC2G126	8	Dual Bus Buffers with 3-State Outputs	✓				✓				✓	SCES533
SN74AUC2G157	8	Dual 2-to-1 Line Data Selectors/Multiplexers	+				+				+	Call
SN74AUC2G240	8	Dual Buffers/Drivers with 3-State Outputs	✓				✓				✓	SCES534
SN74AUC2G241	8	Dual Buffers/Drivers with 3-State Outputs	✓				✓				✓	SCES535
SN74AUC2G257	8	Dual 2-1 Line Data Selectors/Multiplexers with 3-State Outputs	+				+				+	Call
SN74AUC3G04	8	Triple Inverters	+			+						Call
SN74AUC3GU04	8	Triple Inverters	+			+						Call
SN74AUC3G06	8	Triple Inverter Buffers/Drivers with Open-Drain Outputs	+			+						Call
SN74AUC3G07	8	Triple Buffers/Drivers with Open-Drain Outputs	+			+						Call
SN74AUC3G14	8	Triple Schmitt-Trigger Inverters	+			+						Call
SN74AUC3G17	8	Triple Schmitt-Trigger Buffers	+			+						Call
SN74AUC3G34	8	Triple Buffer Gates	+			+						Call
SN74AUC00	14	Quadruple 2-Input Positive-NAND Gates			✓							SCES510
SN74AUC02	14	Quadruple 2-Input Positive-NOR Gates			✓							SCES511

DEVICE SELECTION GUIDE

AUC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
SN74AUC04	14	Hex Inverters			✓							SCES444
SN74AUCU04	14	Hex Inverters			✓							SCES445
SN74AUC06	14	Hex Inverter Buffers/Drivers with Open-Drain Outputs			✓							SCES471
SN74AUC07	14	Hex Buffers/Drivers with Open-Drain Outputs			✓							SCES472
SN74AUC08	14	Quadruple 2-Input Positive-AND Gates			✓							SCES512
SN74AUC14	14	Hex Schmitt-Trigger Inverters			✓							SCES473
SN74AUC17	14	Hex Schmitt-Trigger Buffers			✓							SCES497
SN74AUC32	14	Quadruple 2-Input Positive-OR Gates			✓							SCES513
SN74AUC34	14	Hex Buffer Gates			✓							SCES474
SN74AUC74	14	Dual Positive-Edge-Triggered D-Type Flip-Flops with Clear and Preset			✓							SCES483
SN74AUC125	14	Quadruple Bus Buffer Gates with 3-State Outputs			✓							SCES508
SN74AUC126	14	Quadruple Bus Buffer Gates with 3-State Outputs			✓							SCES509
SN74AUC240	20	Octal Buffers/Drivers with 3-State Outputs			✓							SCES430
SN74AUCH240	20	Octal Buffers/Drivers with 3-State Outputs			✓							SCES431
SN74AUC244	20	Octal Buffers/Drivers with 3-State Outputs			✓							SCES432
SN74AUCH244	20	Octal Buffers/Drivers with 3-State Outputs			✓							SCES433
SN74AUC245	20	Octal Bus Transceivers with 3-State Outputs			✓					✓		SCES419
SN74AUCH245	20	Octal Bus Transceivers with 3-State Outputs			✓					✓		SCES420
SN74AUC16240	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓	✓		SCES390
SN74AUC16244	48/56	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓	✓		SCES399
SN74AUC16245	48	16-Bit Transceivers with 3-State Outputs						✓	✓	✓		SCES392
SN74AUC16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs						✓	✓	✓		SCES401
SN74AUC16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs						✓	✓	✓		SCES403
SN74AUC16501	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓	✓		SCES418
SN74AUC32245	96	32-Bit Transceivers with 3-State Outputs		✓								SCES410
SN74AUC32374	96	32-Bit D-Type Flip-Flops with 3-State Outputs		✓								SCES475
SN74AUCH16244	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓	✓		SCES391
SN74AUCH32244	96	32-Bit Buffers/Drivers with 3-State Outputs		✓								SCES412
SN74AUCH32374	96	32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓								SCES476

AUP

Advanced Ultra-Low-Power CMOS Logic

AUP is the industry's lowest-power logic family, extending battery life up to 73% over industry standard 3.3-V logic options. Current low-voltage logic devices may consume a significant amount of power (up to 7% of standby power) in typical portable applications; TI's new AUP family provides designers the capability of designing less power-hungry systems. Comparatively, AUP consumes 91% less static and 83% less dynamic power than the industry standard 3.3-V low-voltage logic technologies.

Along with power, speed remains a critical aspect of portable application designs. AUP provides the best speed-power technology of choice in the industry, with typical propagation delays of 2 ns at 3.3 V (3 ns at 1.8 V). The first AUP devices released include configurable Little Logic functions, and all small-scale Little Logic packages will be offered, including the NanoFree™ WCSP technology.

In addition to the extensive list of standard AUP Little Logic gates, the voltage-translating AUP1T97/98/57/58 logic gates can be configured into as many as nine different Boolean functions per device, including some functional combinations not found in traditional discrete logic. These single-gate translators can reduce bill-of-materials parts count by combining common Boolean logic functions and voltage translation into a single device, resulting in PC board space savings and simplified inventory. The AUP1T97/98/57/58 are optimized for 1.8-V LVCMOS input signals while operating from a single 3.3-V V_{CC} supply, but can perform 1.8-V to 2.5-V, 2.5-V to 3.3-V, and 3.3-V to 2.5-V voltage translation as well.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AUP

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			DSBGA	SOT	SSOP	VSSOP	
SN74AUP1G00	5	Low-Power Single 2-Input Positive-NAND Gates	✓	✓			SCES604
SN74AUP1G02	5	Low-Power Single 2-Input NOR Gates		✓			SCES568
SN74AUP1G04	5	Low-Power Single Inverter Gates		✓			SCES571
SN74AUP1G06	5	Low-Power Single Inverter Buffers/Drivers with Open-Drain Outputs		✓			SCES590
SN74AUP1G07	5	Low-Power Single Buffers/Drivers with Open-Drain Outputs		✓			SCES591
SN74AUP1G08	5	Low-Power Single 2-Input Positive-AND Gates	✓	✓			SCES502
SN74AUP1G14	5	Low-Power Single Schmitt-Trigger Inverters		✓			SCES578
SN74AUP1G17	5	Low-Power Single Schmitt-Trigger Buffers	✓	✓			SCES579
SN74AUP1G32	5	Low-Power Single 2-Input OR Gates		✓			SCES580
SN74AUP1G57	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES503
SN74AUP1G58	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES504
SN74AUP1G79	5	Low-Power Single Positive-Edge-Triggered D-Type Flip-Flops		✓			SCES592
SN74AUP1G80	5	Low-Power Single Positive-Edge-Triggered D-Type Flip-Flops		✓			SCES593
SN74AUP1G97	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES505
SN74AUP1G98	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES506
SN74AUP1G99	8	Low-Power Ultra-Configurable Multiple-Function Gates with 3-State Outputs			✓	✓	SCES594
SN74AUP1T57	6	Single-Supply Voltage Translators	✓	✓			SCES611
SN74AUP1T58	6	Single-Supply Voltage Translators	✓	✓			SCES612
SN74AUP1T97	6	Single-Supply Voltage Translators	✓	✓			SCES613
SN74AUP1T98	6	Single-Supply Voltage Translators		✓			SCES614

commercial package description and availability

DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 16/20/24 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

[†] JEDEC reference for wafer chip scale package (WCSP)

AVC

Advanced Very-Low-Voltage CMOS Logic

TI's new AVC logic family provides designers the tools to create advanced high-speed systems with propagation delays of less than 2 ns. Though optimized for 2.5-V systems, AVC logic supports operating voltages between 1.2 V and 3.6 V. The AVC family features TI's DOC™ circuitry, which dynamically lowers circuit output impedance during signal transition for fast rise and fall times, and then raises the impedance after signal transmission to reduce ringing.

Trends in digital electronics design emphasize lower power consumption, lower supply voltages, faster operating speeds, smaller timing budgets, and heavier loads. Many designs are making the transition from 3.3 V to 2.5 V, with bus speeds increasing beyond 100 MHz. Signal integrity need not be compromised to meet these design requirements. TI's AVC family is designed to meet the needs of these high-speed, low-voltage systems, including next-generation high-performance workstations, PCs, networking servers, and telecommunications switching equipment.

Key features:

- Sub-2-ns maximum t_{pd} at 2.5 V for AVC16245
- Designed for next-generation, high-performance PCs, workstations, and servers
- DOC circuitry enhances high-speed, low-noise operation.
- Supports mixed-voltage systems
- Optimized for 2.5 V; operable from 1.2 V to 3.6 V
- Bus-hold feature eliminates need for external resistors on unused input pins.
- I_{off} supports partial power down.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

AVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
SN74AVC1T45	6	Single-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs	✓			✓						SCES530
SN74AVCH1T45	6	Single-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs	✓			✓						SCES598
SN74AVC2T45	8	Dual-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs					✓				✓	SCES531
SN74AVCH2T45	8	Dual-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs	+				✓				✓	SCES582
SN74AVC8T245	24	8-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs			✓			✓	✓			SCES517
SN74AVCH8T245	24	8-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓			SCES565
SN74AVC16T245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Translation and 3-State Outputs						✓	✓	✓		SCES551
SN74AVCH16T245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Translation and 3-State Outputs						✓	✓	✓		SCES587
SN74AVC20T245	56	20-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES518
SN74AVCH20T245	56	20-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES567

commercial package description and availability

DSBGA (die-size ball grid array)†
 YEA, YZA = 5/6/8 pins
 YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)
 GGM = 80/100 pins
 GKE, ZKE = 96 pins
 GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)
 GQN, ZQN = 20 pins
 GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)
 P = 8 pins
 N = 14/16/20/24 pins
 NT = 24/28 pins

PLCC (plastic leaded chip carrier)
 FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)
 D = 8/14/16 pins
 DW = 16/18/20/24/28 pins

SOT (small-outline transistor)
 PK = SOT-89
 DBV = SOT-23
 DCY = SOT-223
 DCK = SC-70

QFN (quad flatpack no lead)
 RGY = 14/16/20 pins
 RGQ = 56 pins

QFP (quad flatpack)
 RC = 52 pins (FB only)
 PH = 80 pins (FIFOs only)
 PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)
 PZA = 80 pins

TQFP (plastic thin quad flatpack)
 PAH = 52 pins
 PAG = 64 pins (FB only)
 PM = 64 pins
 PN = 80 pins
 PCA, PZ = 100 pins (FB only)
 PCB = 120 pins (FIFOs only)

SOP (small-outline package)
 PS = 8 pins
 NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)
 DBQ = 16/20/24 pins

SSOP (shrink small-outline package)
 DCT = 8 pins
 DB = 14/16/20/24/28/30/38 pins
 DBQ = 16/20/24 pins
 DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)
 PW = 8/14/16/20/24/28 pins
 DGG = 48/56/64 pins

TVSOP (thin very small-outline package)
 DGV = 14/16/20/24/48/56 pins
 DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)
 DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
SN74AVC24T245	83	24-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES552
SN74AVCH24T245	83	24-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES588
SN74AVC32T245	96	32-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES553
SN74AVCH32T245	96	32-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES589
SN74AVCA406	48	MMC, SD Card, Memory Stick™, SmartMedia, and xD-Picture Card™ Voltage-Translation Transceivers		✓				✓		✓		SCES615
SN74AVC16244	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓	✓		SCES150
SN74AVC16245	48	16-Bit Bus Transceivers with 3-State Outputs						✓	✓			SCES142
SN74AVC16269	56	12-Bit to 24-Bit Registered Bus Exchangers with 3-State Outputs						✓	✓			SCES152
SN74AVC16334	48	16-Bit Universal Bus Drivers with 3-State Outputs						✓	✓			SCES154
SN74AVC16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs						✓	✓	✓		SCES156
SN74AVC16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs						✓	✓	✓		SCES158
SN74AVC16646	56	16-Bit Bus Transceivers and Registers with 3-State Outputs						✓	✓			SCES181
SN74AVC16722	64	20-Bit D-Type Flip-Flops with 3-State Outputs						✓				SCES166
SN74AVC16827	56	20-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCES176
SN74AVC16834	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓			SCES183
SN74AVC16835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓			SCES168
SN74AVC32373	96	1.2-V/3.3-V 32-Bit Transparent D-Type Latches with 3-State Outputs		+								SCES327
SN74AVCA164245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES395
SN74AVCAH164245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES396

DEVICE SELECTION GUIDE

AVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			DSBGA	LFBGA	QFN	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
SN74AVCB164245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES394
SN74AVCB324245	96	32-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES485
SN74AVCBH324245	96	32-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs		✓								SCES550
SN74AVCBH164245	48/56	16-Bit Dual-Supply Bus Transceivers with Configurable Voltage Translation and 3-State Outputs						✓	✓	✓		SCES393

BCT

BiCMOS Technology Logic

BCT is a family of 8-, 9-, and 10-bit drivers, latches, transceivers, and registered transceivers. Designed specifically for bus-interface applications, BCT offers TTL I/O with high speeds, 64-mA output drive, and very low power in the disabled mode. Over 50 BCT functions are in production.

The BCT25xxx series of fast, high-drive bus-interface functions provides incident-wave switching required by large backplane applications. Designed specifically to ensure incident-wave switching down to 25 Ω , these low-impedance driver devices can maximize the speed and reliability of heavily loaded systems. Each device of this series delivers 188 mA of I_{OL} drive current.

Also included in TI's BCT family are devices with series damping resistors to reduce overshoot and undershoot that can occur in memory-driving applications.

See www.ti.com/sc/logic for the most current data sheets.

64BCT

64-Series BiCMOS Technology Logic

The 64BCT family offers all the features found in TI's standard BCT family. In addition, the family is characterized for operation from -40°C to 85°C and incorporates circuitry to protect the device in live-insertion applications.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

BCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
SN74BCT125A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓			SCBS032
SN74BCT126A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓				SCBS252
SN74BCT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓		SCBS004
SN74BCT241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓			SCBS005
SN74BCT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓		SCBS006
SN74BCT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	✓	SCBS013
SN74BCT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓		SCBS016
SN74BCT374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓			SCBS019
SN74BCT540A	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓			SCBS012
SN74BCT541A	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓			SCBS011
SN74BCT543	24	Octal Registered Transceivers with 3-State Outputs	✓	✓	✓	✓			SCBS026
SN74BCT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓			SCBS071
SN74BCT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓		SCBS074
SN74BCT623	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓			SCBS020
SN74BCT640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓				SCBS025
SN74BCT756	20	Octal Buffers and Line Drivers with Open-Collector Outputs		✓	✓				SCBS056
SN74BCT757	20	Octal Buffers and Line Drivers with Open-Collector Outputs		✓	✓				SCBS041
SN74BCT760	20	Octal Buffers and Line Drivers with Open-Collector Outputs	✓	✓	✓	✓			SCBS034
SN74BCT2240	20	Octal Buffers and Line/MOS Drivers with Series Damping Resistors and 3-State Outputs	✓	✓	✓	✓	✓		SCBS030
SN74BCT2241	20	Octal Buffers and Line/MOS Drivers with Series Damping Resistors and 3-State Outputs		✓	✓	✓			SCBS035
SN74BCT2244	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs	✓	✓	✓	✓			SCBS017
SN74BCT2245	20	Octal Transceivers and Line MOS Drivers with Series Damping Resistors and 3-State Outputs		✓	✓	✓	✓		SCBS102
SN74BCT2414	20	Dual 2-Line to 4-Line Memory Decoders with On-Chip Supply-Voltage Monitor		✓	✓				SCBS059
SN74BCT2827C	24	10-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs		✓	✓				SCBS007
SN74BCT25244	24	25-Ω Octal Buffers/Drivers with 3-State Outputs		✓	✓	✓			SCBS064
SN74BCT25245	24	25-Ω Octal Bus Transceivers with 3-State Outputs		✓	✓	✓			SCBS053
SN74BCT25642	24	25-Ω Octal Bus Transceivers with Open-Collector Outputs		✓	✓				SCBS047
SN74BCT29821	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs		✓	✓				SCBS021
SN74BCT29825	24	Octal Bus-Interface Flip-Flops with 3-State Outputs		✓	✓				SCBS075
SN74BCT29827B	24	10-Bit Buffers/Drivers with 3-State Outputs		✓	✓	✓			SCBS008

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
SN74BCT29843	24	9-Bit D-Type Bus-Interface Latches with 3-State Outputs		✓	✓				SCBS256
SN74BCT29863B	24	9-Bit Bus Transceivers with 3-State Outputs		✓	✓				SCBS015
SN74BCT29864B	24	9-Bit Bus Transceivers with 3-State Outputs		✓	✓				SCBS010

DEVICE SELECTION GUIDE

64BCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY		LITERATURE REFERENCE
			PDIP	SOIC	
SN64BCT125A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	SCBS052
SN64BCT126A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	SCBS051
SN64BCT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	SCBS027
SN64BCT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	SCBS040
SN64BCT757	20	Octal Buffers and Line Drivers with Open-Collector Outputs	✓	✓	SCBS479
SN64BCT25244	24	25-Ω Octal Buffers/Drivers with 3-State Outputs	✓	✓	SCBS477
SN64BCT25245	24	25-Ω Octal Bus Transceivers with 3-State Outputs	✓	✓	SCBS060

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



BTA

Bus-Termination Arrays

TI's BTA family offers a space-saving, efficient, and effective solution to bus-termination requirements. In high-speed digital systems with long transmission lines, reflecting waves on the line can cause voltage undershoots and overshoots that lead to malfunctions at the driven input. A BTA is a series of diodes that clamps a signal on a bus or any other signal trace using high-frequency logic to limit overshoot and undershoot problems.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

BTA

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SSOP	TSSOP	
SN74F1016	20	16-Bit Schottky Barrier Diode R-C Bus-Termination Arrays			✓			SDFS093
SN74S1050	16	12-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓			SDLS015
SN74S1051	16	12-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓			SDLS018
SN74S1052	20	16-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓			SDLS016
SN74S1053	20	16-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓	✓		SDLS017
SN74F1056	16	8-Bit Schottky Barrier Diode Bus-Termination Arrays			✓			SDFS085
SN74ACT1071	14	10-Bit Bus-Termination Networks with Bus-Hold Function			✓			SCAS192
SN74ACT1073	20	16-Bit Bus-Termination Networks with Bus-Hold Function			✓			SCAS193
CD40117B	14	Programmable Dual 4-Bit Terminators	✓	✓			✓	SCHS101

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



CB3Q

2.5-V/3.3-V Low-Voltage High-Bandwidth Bus-Switch Crossbar Technology Logic

CB3Q is a high-bandwidth (up to 500 MHz) FET bus-switch family utilizing a charge pump to elevate the gate voltage of the pass transistor, providing low and flat ON-state resistance (r_{on}) characteristics. These FET bus switches provide high-performance low-power replacements for standard bus-interface devices when signal buffering (current drive) is not required. The low and flat ON-state resistance allows for minimal propagation delay and supports rail-to-rail input/output (RRIO) switching on the data I/O ports. The CB3Q family also features low data I/O capacitance to minimize capacitive loading and signal distortion on the data bus. Specifically designed to support high-bandwidth applications, the CB3Q family provides an optimized interface solution ideally suited for broadband communications, networking, and data-intensive computing systems.

CB3Q devices are available in advanced packaging, such as the quarter-size small-outline package (QSOP), thin shrink small-outline package (TSSOP), thin very small-outline package (TVSOP), and quad flatpack no lead (QFN).

See www.ti.com/signalswitches for additional information regarding the CB3Q product family.

DEVICE SELECTION GUIDE

CB3Q

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			LFBGA	QFN	QSOP	SOIC	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
2-Port Switch												
SN74CB3Q3125	14/16	2.5-V/3.3-V Low-Voltage High-Bandwidth Quadruple FET Bus Switches		✓	✓		✓	✓	✓			SCDS143
SN74CB3Q3244	16/20	2.5-V/3.3-V Low-Voltage High-Bandwidth 8-Bit FET Bus Switches		✓	✓	✓	✓	✓	✓	✓		SCDS154
SN74CB3Q3245	20	2.5-V/3.3-V Low-Voltage High-Bandwidth 8-Bit FET Bus Switches		✓	✓		✓	✓	✓	✓		SCDS124
SN74CB3Q3305	8	2.5-V/3.3-V Low-Voltage High-Bandwidth Dual FET Bus Switches						✓			✓	SCDS141
SN74CB3Q3306A	8	2.5-V/3.3-V Low-Voltage High-Bandwidth Dual FET Bus Switches						✓			✓	SCDS113
SN74CB3Q3345	20	2.5-V/3.3-V Low-Voltage High-Bandwidth 8-Bit FET Bus Switches		✓	✓		✓	✓	✓			SCDS144
SN74CB3Q3384A	24	2.5-V/3.3-V Low-Voltage High-Bandwidth 10-Bit FET Bus Switches			✓			✓	✓			SCDS114
SN74CB3Q6800	24	2.5-V/3.3-V Low-Voltage High-Bandwidth 10-Bit FET Bus Switches with Precharged Outputs			✓		✓	✓	✓			SCDS142
SN74CB3Q16210	48	2.5-V/3.3-V Low-Voltage High-Bandwidth 20-Bit FET Bus Switches					✓	✓	✓			SCDS151
SN74CB3Q16211	56	2.5-V/3.3-V Low-Voltage High-Bandwidth 24-Bit FET Bus Switches					✓	✓	✓	✓		SCDS152
SN74CB3Q16245	48	2.5-V/3.3-V Low-Voltage FET Bus Switches 16-Bit Switches					✓	✓	✓			SCDS171
SN74CB3Q16811	56	2.5-V/3.3-V Low-Voltage High-Bandwidth 24-Bit FET Bus Switches with Precharged Outputs					✓	✓	✓			SCDS153

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 16/20/24 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			LFBGA	QFN	QSOP	SOIC	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
Multiplexer/Demultiplexer												
SN74CB3Q3251	16	2.5-V/3.3-V High-Bandwidth 1-of-8 FET Multiplexers/Demultiplexers		✓	✓			✓	✓			SCDS173
SN74CB3Q3253	16	2.5-V/3.3-V Low-Voltage High-Bandwidth Dual 1-of 4 FET Multiplexers/Demultiplexers		✓	✓		✓	✓	✓			SCDS145
SN74CB3Q3257	16	2.5-V/3.3-V Low-Voltage High-Bandwidth 4-Bit 1-of-2 FET Multiplexers/Demultiplexers		✓	✓		✓	✓	✓			SCDS135
SN74CB3Q16244	48	2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches 16-Bit FET Bus Switches					✓	✓	✓			SCDS168
SN74CB3Q32245	96	2.5-V/3.3-V High-Bandwidth 32-Bit Bus Switches	✓									SCES622

CB3T

2.5-V/3.3-V

Low-Voltage Translator Bus-Switch Crossbar Technology Logic

CB3T is a high-speed TTL-compatible FET bus-switch family, with low ON-state resistance (r_{on}) allowing for minimal propagation delay. These FET bus switches provide high-performance low-power replacements for standard bus-interface devices when signal buffering (current drive) is not required. The CB3T family fully supports mixed-mode signal operation on all data I/O ports by providing voltage translation that tracks V_{CC} . The CB3T family supports systems using 5-V TTL, 3.3-V LVTTL, and 2.5-V CMOS switching standards, as well as user-defined switching levels. This voltage-translation feature allows the CB3T family to provide a high-performance interface between components (memory, processors, logic, ASICs, I/O peripherals, etc.) that require the different signaling standards (5-V TTL, 3.3-V LVTTL, 2.5-V CMOS, etc.) common in mixed 2.5-V to 5-V system environments. Specifically designed to support today's portable computing and communications applications, the CB3T family provides a high-performance low-power interface solution ideally suited for low-power portable equipment.

CB3T devices are available in advanced packaging, such as the shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), thin very small-outline package (TVSOP), and very thin shrink small-outline package (VSSOP).

See www.ti.com/signalswitches for additional information regarding the CB3T product family.

DEVICE SELECTION GUIDE

CB3T

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE	
			QSOP	SOIC	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
2-Port Switch											
SN74CB3T1G125	5	2.5-V/3.3-V Low-Voltage Single FET Bus Switches with 5-V-Tolerant Level Shifter			✓						SCDS150
SN74CB3T3125	14/16	2.5-V/3.3-V Low-Voltage Quadruple FET Bus Switches with 5-V-Tolerant Level Shifter					✓	✓			SCDS120
SN74CB3T3245	20	2.5-V/3.3-V Low-Voltage 8-Bit FET Bus Switches with 5-V-Tolerant Level Shifter	✓	✓		✓	✓	✓			SCDS136
SN74CB3T3306	8	2.5-V/3.3-V Low-Voltage Dual FET Bus Switches with 5-V-Tolerant Level Shifter				✓				✓	SCDS119
SN74CB3T3383	24	2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifter 10-Bit FET Bus-Exchange Switches	✓	✓			✓				SCDS158
SN74CB3T3384	24	2.5-V/3.3-V Low-Voltage 10-Bit FET Bus Switches with 5-V-Tolerant Level Shifter	✓	✓		+	✓	+			SCDS159
SN74CB3T16210	48	2.5-V/3.3-V Low-Voltage 20-Bit FET Bus Switches with 5-V-Tolerant Level Shifter				+	✓	✓			SCDS156
SN74CB3T16211	56	2.5-V/3.3-V Low-Voltage 24-Bit FET Bus Switches with 5-V-Tolerant Level Shifter				✓	✓	✓	✓		SCDS147
Multiplexer/Demultiplexer											
SN74CB3T3253	16	2.5-V/3.3-V Low-Voltage Dual 1-of-4 FET Multiplexers/Demultiplexers with 5-V-Tolerant Level Shifter	✓	✓		✓	✓	✓			SCDS148
SN74CB3T3257	16	2.5-V/3.3-V Low-Voltage 4-Bit 1-of-2 FET Multiplexers/Demultiplexers with 5-V-Tolerant Level Shifter					✓	✓			SCDS149
Bus-Exchange Switch											
SN74CB3T16212	56	2.5-V/3.3-V Low-Voltage 24-Bit FET Bus-Exchange Switches with 5-V-Tolerant Level Shifter				✓	✓	✓	✓		SCDS157

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



CBT

Crossbar Technology Logic

Power and speed are two primary concerns in today's computing market. CBT can address these issues in bus-interface applications. CBT enables a bus-interface device to function as a very fast bus switch, effectively isolating buses when the switch is open and offering very little propagation delay when the switch is closed. These devices can function as high-speed bus interfaces between computer-system components, such as the central processing unit (CPU) and memory. CBT devices also can be used as 5-V to 3.3-V translators, allowing designers to mix 5-V or 3.3-V components in the same system. In addition, the new CBTxxxxC devices provide undershoot protection on all ports down to -2 V.

The CBT devices are available in advanced packaging, such as the quad flatpack no-lead (QFN) package, small-outline integrated circuit (SOIC), small-outline transistor (SOT), quarter-size small-outline package (QSOP), shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin very small-outline package (TVSOP) for reduced board area. Selected devices are offered in MicroStar BGA™ (LFBGA) and MicroStar Jr.™ (VFBGA) packages.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

CBT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY										LITERATURE REFERENCE
			MIL	LFBGA	QFN	QSOP	SOIC	SOT	SSOP	TSSOP	TVSOP	VFBGA	
2-Port Switch													
SN74CBT1G125	5	Single FET Bus Switches						✓					SCDS046
SN74CBTD1G125	5	Single FET Bus Switches with Level Shifting						✓					SCDS063
SN74CBT1G384	5	Single FET Bus Switches						✓					SCDS065
SN74CBTD1G384	5	Single FET Bus Switches with Level Shifting						✓					SCDS066
SN74CBT3125	14/16	Quad FET Bus Switches			✓	✓	✓		✓	✓	✓		SCDS021
SN74CBT3126	14/16	Quad FET Bus Switches			✓	✓	✓		✓	✓	✓		SCDS020
SN74CBT3244	20	Octal FET Bus Switches			✓	✓	✓		✓	✓	✓	✓	SCDS001
SN74CBT3245A	20	Octal FET Bus Switches			✓	✓	✓		✓	✓	✓	✓	SCDS002
SN74CBT3306	8	Dual FET Bus Switches					✓			✓			SCDS016
SN74CBTD3306	8	Dual FET Bus Switches with Level Shifting					✓			✓			SCDS030
SN74CBTS3306	8	Dual FET Bus Switches with Schottky Diode Clamping					✓			✓			SCDS029
SN74CBT3345	20	8-Bit FET Bus Switches				✓	✓		✓	✓	✓		SCDS027
SN74CBT3384A	24	10-Bit FET Bus Switches				✓	✓		✓	✓	✓		SCDS004
SN74CBTD3384	24	10-Bit FET Bus Switches with Level Shifting				✓	✓		✓	✓	✓		SCDS025
SN74CBTS3384	24	10-Bit FET Bus Switches with Schottky Diode Clamping				✓	✓		✓	✓	✓		SCDS024
SN74CBT3861	24	10-Bit FET Bus Switches				✓	✓		✓	✓	✓		SCDS061
SN74CBTD3861	24	10-Bit FET Bus Switches with Level Shifting				✓	✓		✓	✓	✓		SCDS084
SN74CBT6800A	24	10-Bit FET Bus Switches with Precharged Outputs for Live Insertion				✓	✓		✓	✓	✓		SCDS005
SN74CBTK6800	24	10-Bit FET Bus Switches with Precharged Outputs and Active-Clamp Undershoot-Protection Circuit				✓	✓		✓	✓	✓		SCDS107
SN74CBTS6800	24	10-Bit FET Bus Switches with Precharged Outputs and Diode Clamping				✓	✓		✓	✓	✓		SCDS102

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY										LITERATURE REFERENCE
			MIL	LFBGA	QFN	QSOP	SOIC	SOT	SSOP	TSSOP	TVSOP	VFBGA	
SN74CBT16210	48	20-Bit FET Bus Switches							✓	✓	✓		SCDS033
SN74CBTD16210	48	20-Bit FET Bus Switches							✓	✓	✓		SCDS049
SN74CBT16211A	56	24-Bit FET Bus Switches							✓	✓	✓	✓	SCDS028
SN74CBTD16211	56	24-Bit FET Bus Switches with Level Shifting							✓	✓	✓		SCDS048
SN74CBTH16211	56	24-Bit FET Bus Switches with Bus Hold							✓	✓	✓		SCDS062
SN74CBTS16211	56	24-Bit FET Bus Switches with Schottky Diode Clamping							✓	✓	✓		SCDS050
SN74CBT16244	48	16-Bit FET Bus Switches	✓						✓	✓	✓		SCDS031
SN74CBT16245	48	16-Bit FET Bus Switches							✓	✓	✓		SCDS070
SN74CBTK16245	48	16-Bit FET Bus Switches with Active-Clamp Undershoot-Protection Circuit							✓	✓	✓		SCDS105
SN74CBT16861	48	20-Bit FET Bus Switches							✓	✓	✓	+	SCDS068
SN74CBTR16861	48	20-Bit FET Bus Switches with Series Damping Resistors							✓	✓	✓		SCDS078
SN74CBT32245	96	32-Bit FET Bus Switches		✓									SCDS104
SN74CBTK32245	96	32-Bit FET Bus Switches with Active-Clamp Undershoot-Protection Circuit		✓									SCDS106
SN74CBT34X245	80	32-Bit FET Bus Switches									✓		SCDS089
Multiplexer/Demultiplexer													
SN74CBT3251	16	1-of-8 FET Multiplexers/Demultiplexers			✓	✓	✓		✓	✓			SCDS019
SN74CBT3253	16	Dual 1-of-4 FET Multiplexers/Demultiplexers			✓	✓	✓		✓	✓			SCDS018
SN74CBT3257	16	4-Bit 1-of-2 FET Multiplexers/Demultiplexers			✓	✓	✓		✓	✓			SCDS017
SN74CBT16214	56	12-Bit 1-of-3 FET Multiplexers/Demultiplexers							✓	✓			SCDS008
SN74CBT16232	56	Synchronous 16-Bit 1-of-2 FET Multiplexers/Demultiplexers							✓	✓			SCDS009
SN74CBT16233	56	16-Bit 1-of-2 FET Multiplexers/Demultiplexers							✓	✓	✓		SCDS010
SN74CBT16292	56	12-Bit 1-of-2 FET Multiplexers/Demultiplexers with Internal Pulldown Resistors							✓	✓	✓		SCDS053
SN74CBT16390	56	16-Bit to 32-Bit FET Multiplexer/Demultiplexer Bus Switches							✓	✓	✓		SCDS035
SN74CBT162292	56	12-Bit 1-of-2 Multiplexers/Demultiplexers with Internal Pulldown Resistors							✓	✓	✓		SCDS052
Bus-Exchange Switch													
SN74CBT3383	24	10-Bit FET Bus-Exchange Switches	✓			✓	✓		✓	✓	✓		SCDS003
SN74CBT16209A	48	18-Bit FET Bus-Exchange Switches	✓						✓	✓	✓		SCDS006
SN74CBT16212A	56	24-Bit FET Bus-Exchange Switches	✓						✓	✓	✓	✓	SCDS007
SN74CBTS16212	56	24-Bit FET Bus-Exchange Switches with Schottky Diode Clamping							✓	✓	✓		SCDS036
SN74CBT16213	56	24-Bit FET Bus-Exchange Switches							✓	✓			SCDS026

CBT-C

5-V Bus-Switch

Crossbar Technology Logic

With –2-V Undershoot Protection

CBT-C is a high-speed TTL-compatible FET bus-switch family with low ON-state resistance (r_{on}) allowing for minimal propagation delay. These FET bus switches provide high-performance low-power replacements for standard bus-interface devices when signal buffering (current drive) is not required. The new CBT-C family offers numerous enhancements over the original CBT family, including –2-V undershoot protection, faster enable/disable times, and an I_{off} feature for partial-power-down mode operation. The improved undershoot characteristics of the CBT-C family are particularly important in system environments where signal reflections and undershoot are common. Without such protection, an undershoot event could cause a switch in the OFF state to be turned ON, creating bus contention and possible data corruption. The active undershoot-protection circuitry on the A and B ports of the CBT-C family provides protection for up to –2 V by sensing an undershoot event and ensuring that the switch remains in the proper OFF state.

CBT-C devices are available in advanced packaging, such as the quarter-size small-outline package (QSOP), thin shrink small-outline package (TSSOP), thin very small-outline package (TVSOP), and quad flatpack no lead (QFN).

See www.ti.com/signalswitches for additional information regarding the CBT-C product family.

DEVICE SELECTION GUIDE

CBT-C

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE	
			QFN	QSOP	SOIC	SSOP	TSSOP	TVSOP		
2-Port Switch										
SN74CBT3305C	8	Dual FET Bus Switches with –2-V Undershoot Protection			✓		✓			SCDS125
SN74CBTD3305C	8	Dual FET Bus Switches with Level Shifting and –2-V Undershoot Protection			✓		✓			SCDS126
SN74CBT3306C	8	Dual FET Bus Switches with –2-V Undershoot Protection			✓		✓			SCDS127
SN74CBTD3306C	8	Dual FET Bus Switches with Level Shifting and –2-V Undershoot Protection			✓		✓			SCDS128
SN74CBT3125C	14/16	Quadruple FET Bus Switches with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS122
SN74CBT3244C	20	8-Bit FET Bus Switches with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS130
SN74CBT3245C	20	8-Bit FET Bus Switches with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS131
SN74CBT3345C	20	8-Bit FET Bus Switches with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS129
SN74CBT3384C	24	10-Bit FET Bus Switches with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS132
SN74CBTD3384C	24	10-Bit FET Bus Switches with Level Shifting and –2-V Undershoot Protection		✓	✓	✓	✓	✓		SCDS133
SN74CBT6800C	24	10-Bit FET Bus Switches with Precharged Outputs and –2-V Undershoot Protection		✓	✓	✓	✓	✓		SCDS138
SN74CBT6845C	20	8-Bit FET Bus Switches with Precharged Outputs and –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS140
SN74CBT16210C	48	20-Bit FET Bus Switches with –2-V Undershoot Protection				✓	✓	✓		SCDS115
SN74CBT16211C	56	24-Bit FET Bus Switches with –2-V Undershoot Protection				✓	✓	✓		SCDS116
SN74CBT16244C	48	16-Bit FET Bus Switches with –2-V Undershoot Protection				✓	✓	✓		SCDS134
SN74CBT16245C	48	16-Bit FET Bus Switches with –2-V Undershoot Protection				✓	✓	✓		SCDS139
SN74CBT16800C	48	20-Bit FET Bus Switches with Precharged Outputs and –2-V Undershoot Protection				✓	✓	✓		SCDS117
SN74CBT16811C	56	24-Bit FET Bus Switches with Precharged Outputs and –2-V Undershoot Protection				✓	✓	✓		SCDS118
Multiplexer/Demultiplexer										
SN74CBT3253C	16	Dual 1-of-4 FET Multiplexers/Demultiplexers with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS123
SN74CBT3257C	16	4-Bit 1-of-2 FET Multiplexers/Demultiplexers with –2-V Undershoot Protection	✓	✓	✓	✓	✓	✓		SCDS137
SN74CBT16214C	56	12-Bit 1-of-3 FET Multiplexers/Demultiplexers with –2-V Undershoot Protection				✓	✓			SCDS121

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			QFN	QSOP	SOIC	SSOP	TSSOP	TVSOP	
Bus-Exchange Switch									
SN74CBT3383C	24	10-Bit FET Bus-Exchange Switches with –2-V Undershoot Protection		✓	✓	✓	✓	✓	SCDS175
SN74CBT16212C	56	12-Bit FET Bus-Exchange Switches with –2-V Undershoot Protection				✓	✓	✓	SCDS146

CBTLV

Low-Voltage Crossbar Technology Logic

TI developed the SN74CBTLV family of 3.3-V bus switches to complement its existing SN74CBT family of 5-V bus switches. TI was the first to offer these devices, designed for 3.3 V, in its continuing drive to provide low-voltage solutions.

CBTLV devices can be used in multiprocessor systems as fast bus connections, bus-exchange switches for crossbar systems, ping-pong memory connections, or bus-byte swapping. They also can be used to replace relays, improving connect/disconnect speed and eliminating relay reliability problems. The CBTLV family, designed to operate at 3.3 V, furthers the goal of an integrated system operating with LVTTTL voltages.

The CBTLV devices are available in industry-leading packaging options, such as the small-outline integrated circuit (SOIC), small-outline transistor (SOT), small-outline package (SOP), quarter-size small-outline package (QSOP), shrink small-outline package (SSOP), thin small-outline package (TSSOP), and thin very small-outline package (TVSOP) for reduced board area.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

CBTLV

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			QFN	QSOP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	
2-Port Switch												
SN74CBTLV1G125	5	Single FET Bus Switches				✓	✓					SCDS057
SN74CBTLV3125	14/16	Quadruple FET Bus Switches	✓	✓	✓	✓	✓	✓	✓	✓		SCDS037
SN74CBTLV3126	14/16	Quadruple FET Bus Switches	✓	✓	✓			✓	✓	✓		SCDS038
SN74CBTLV3245A	20	Octal FET Bus Switches	✓	✓	✓			✓	✓	✓		SCDS034
SN74CBTLV3384	24	10-Bit FET Bus Switches		✓	✓			✓	✓	✓		SCDS059
SN74CBTLV3857	24	10-Bit FET Bus Switches with Internal Pulldown Resistors		✓	✓			✓	✓	✓		SCDS085
SN74CBTLV3861	24	10-Bit FET Bus Switches		✓	✓	✓	✓		✓	✓		SCDS041
SN74CBTLV16210	48	20-Bit FET Bus Switches						✓	✓	✓		SCDS042
SN74CBTLV16211	56	24-Bit FET Bus Switches						✓	✓	✓	+	SCDS043
SN74CBTLV16800	48	20-Bit FET Bus Switches with Precharged Outputs						✓	✓	✓	+	SCDS045
Multiplexer/Demultiplexer												
SN74CBTLV3251	16	1-of-8 FET Multiplexers/Demultiplexers	✓	✓	✓			✓	✓	✓		SCDS054
SN74CBTLV3253	16	Dual 1-of-4 FET Multiplexers/Demultiplexers	✓	✓	✓			✓	✓	✓		SCDS039
SN74CBTLV3257	16	4-Bit 1-of-2 FET Multiplexers/Demultiplexers	✓	✓	✓			✓	✓	✓		SCDS040
SN74CBTLV16292	56	12-Bit 1-of-2 FET Multiplexers/Demultiplexers with Internal Pulldown Resistors						✓	✓	✓		SCDS055
SN74CBTLVR16292	56	12-Bit 1-of-2 FET Multiplexers/Demultiplexers with Internal Pulldown Resistors and Series Damping Resistors						✓	✓			SCDS056
Bus-Exchange Switch												
SN74CBTLV3383	24	10-Bit FET Bus-Exchange Switches		✓	✓			✓	✓	✓		SCDS047
SN74CBTLV16212	56	24-Bit FET Bus-Exchange Switches						✓	✓	✓	+	SCDS044

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



CD4000

CMOS B-Series Integrated Circuits

The CD4000 family is a CMOS B series of devices, with a maximum dc supply-voltage rating of 20 V. The family has a large number of functions, including analog switches, monostable multivibrators, level converters, counters, timers, display drivers, phase-locked loops (PLLs), and other functions. The wide operating voltage range of this family allows use of the CD4000 products in varied applications, including instrumentation, control, and communications.

Key features:

- Wide variety of functions
- High noise immunity
- Low power consumption
- Propagation delay time similar to LSTTL products
- 5-, 10-, and 15-V parametric ratings
- High fanout, typically 10
- Excellent temperature stability

TI's CD4000 products were acquired from Harris Semiconductor in December 1998.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

CD4000

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	TSSOP	
CD4001B	14	Quad 2-Input NOR Gates	✓	✓	✓	✓	✓	SCHS015
CD4001UB	14	Quad 2-Input Unbuffered NOR Gates	✓	✓	✓	✓	✓	SCHS016
CD4002B	14	Dual 4-Input NOR Gates	✓	✓	✓	✓	✓	SCHS015
CD4007UB	14	Dual Unbuffered Complementary Pairs Plus Inverter	✓	✓	✓	✓	✓	SCHS018
CD4009UB	16	Hex Inverting Buffers/Converters	✓	✓	✓	✓	✓	SCHS020
CD4010B	16	Hex Buffers/Converters	✓	✓	✓	✓	✓	SCHS020
CD4010UB	16	Hex Buffers/Converters	✓					Call
CD4011B	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓	SCHS021
CD4011UB	14	Quad 2-Input Unbuffered NAND Gates	✓	✓	✓	✓	✓	SCHS022
CD4012B	14	Dual 4-Input NAND Gates	✓	✓	✓	✓	✓	SCHS021
CD4013B	14	Dual D-Type Flip-Flops	✓	✓	✓	✓	✓	SCHS023
CD4014B	16	8-Stage Static Shift Registers	✓	✓	✓	✓	✓	SCHS024
CD4015B	16	Dual 4-Stage Static Shift Registers	✓	✓	✓	✓	✓	SCHS025
CD4016B	14	Quad Bilateral Switches	✓	✓	✓	✓	✓	SCHS026
CD4017B	16	Decade Counters/Dividers with 1-of-10 Decoded Outputs	✓	✓	✓	✓	✓	SCHS027
CD4018B	16	Divide-by-N Counters	✓	✓	✓	✓	✓	SCHS028
CD4019B	16	Quad AND/OR Select Gates	✓	✓	✓	✓	✓	SCHS029
CD4020B	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓		✓	✓	SCHS030
CD4021B	16	8-Stage Static Shift Registers	✓	✓	✓	✓	✓	SCHS024
CD4022B	16	Octal Counters/Dividers with 1-of-8 Decoded Outputs	✓	✓		✓	✓	SCHS027
CD4023B	14	Triple 3-Input NAND Gates	✓	✓	✓	✓	✓	SCHS021
CD4024B	14	7-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓	✓	SCHS030
CD4025B	14	Triple 3-Input NOR Gates	✓	✓	✓	✓	✓	SCHS015
CD4026B	16	Decade Counters/Drivers with Decoded 7-Segment Display Outputs	✓	✓		✓	✓	SCHS031
CD4027B	16	Dual J-K Master-Slave Flip-Flops	✓	✓	✓	✓	✓	SCHS032
CD4028B	16	BCD-to-Decimal Decoders	✓	✓	✓	✓	✓	SCHS033
CD4029B	16	Presetable Up/Down Binary or BCD-Decade Counters	✓	✓	✓	✓	✓	SCHS034
CD4030B	14	Quad Exclusive-OR Gates	✓	✓	✓	✓	✓	SCHS035
CD4031B	16	64-Stage Static Shift Registers	✓	✓		✓	✓	SCHS036
CD4033B	16	Decade Counters/Drivers with Decoded 7-Segment Display Outputs	✓	✓		✓	✓	SCHS031
CD4034B	24	8-Stage Static Bidirectional Parallel/Serial Input/Output Bus Registers	✓	✓	✓	✓	✓	SCHS037
CD4035B	16	4-Stage Parallel-In/Parallel-Out Shift Registers	✓	✓	✓	✓	✓	SCHS038
CD4040B	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓	✓	SCHS030
CD4041UB	14	Quad True/Complement Buffers	✓	✓	✓	✓	✓	SCHS039
CD4042B	16	Quad Clocked D Latches	✓	✓	✓	✓	✓	SCHS040
CD4043B	16	Quad NOR R/S Latches with 3-State Outputs	✓	✓	✓	✓	✓	SCHS041
CD4044B	16	Quad NAND R/S Latches with 3-State Outputs	✓	✓	✓	✓	✓	SCHS041
CD4045B	16	21-Stage Counters	✓	✓		✓	✓	SCHS042
CD4046B	16	Micropower Phase-Locked Loops with VCO	✓	✓		✓	✓	SCHS043
CD4047B	14	Low-Power Monostable/Astable Multivibrators	✓	✓	✓	✓	✓	SCHS044

commercial package description and availability

schedule

- ✓ = Now
- + = Planned

See Appendix A for package information.



DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	TSSOP	
CD4048B	16	Multifunction Expandable 8-Input Gates	✓	✓	✓	✓	✓	SCHS045
CD4049UB	16	Hex Buffers/Converters	✓	✓	✓	✓	✓	SCHS046
CD4050B	16	Hex Buffers/Converters	✓	✓	✓	✓	✓	SCHS046
CD4051B	16	8-Channel Analog Multiplexers/Demultiplexers with Logic-Level Conversion	✓	✓	✓	✓	✓	SCHS047
CD4052B	16	Dual 4-Channel Analog Multiplexers/Demultiplexers with Logic-Level Conversion	✓	✓	✓	✓	✓	SCHS047
CD4053B	16	Triple 2-Channel Analog Multiplexers/Demultiplexers with Logic-Level Conversion	✓	✓	✓	✓	✓	SCHS047
CD4054B	16	4-Segment Liquid Crystal Display Drivers	✓	✓	✓	✓	✓	SCHS048
CD4055B	16	BCD to 7-Segment Liquid Crystal Decoders/Drivers with Display-Frequency Output	✓	✓	✓	✓	✓	SCHS048
CD4056B	16	BCD to 7-Segment Liquid Crystal Decoders/Drivers with Strobed Latch Function	✓	✓	✓	✓	✓	SCHS048
CD4059A	24	Programmable Divide-by-N Counters	✓	✓	✓			SCHS109
CD4060B	16	14-Stage Binary-Ripple Counters/Dividers and Oscillator	✓	✓	✓	✓	✓	SCHS049
CD4063B	16	4-Bit Magnitude Comparators	✓	✓	✓	✓	✓	SCHS050
CD4066B	14	Quad Bilateral Switches	✓	✓	✓	✓	✓	SCHS051
CD4067B	24	Single 16-Channel Analog Multiplexers/Demultiplexers	✓	✓	✓	✓	✓	SCHS052
CD4068B	14	8-Input NAND/AND Gates	✓	✓	✓	✓	✓	SCHS053
CD4069UB	14	Hex Inverters	✓	✓	✓	✓	✓	SCHS054
CD4070B	14	Quad Exclusive-OR Gates	✓	✓	✓	✓	✓	SCHS055
CD4071B	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓	SCHS056
CD4072B	14	Dual 4-Input OR Gates	✓	✓	✓	✓	✓	SCHS056
CD4073B	14	Triple 3-Input AND Gates	✓	✓	✓	✓	✓	SCHS057
CD4075B	14	Triple 3-Input OR Gates	✓	✓	✓	✓	✓	SCHS056
CD4076B	16	4-Bit D-Type Registers	✓	✓	✓	✓	✓	SCHS058
CD4077B	14	Quad Exclusive-NOR Gates	✓	✓	✓	✓	✓	SCHS055
CD4078B	14	8-Input NOR/OR Gates	✓	✓	✓	✓	✓	SCHS059
CD4081B	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓	SCHS057
CD4082B	14	Dual 4-Input AND Gates	✓	✓	✓	✓	✓	SCHS057
CD4085B	14	Dual 2-Wide 2-Input AND-OR-Invert Gates	✓	✓	✓	✓	✓	SCHS060
CD4086B	14	Expandable 4-Wide 2-Input AND-OR-Invert Gates	✓	✓	✓	✓	✓	SCHS061
CD4089B	16	4-Bit Binary Rate Multipliers	✓	✓		✓	✓	SCHS062
CD4093B	14	Quad 2-Input NAND Schmitt Triggers	✓	✓	✓	✓	✓	SCHS115
CD4094B	16	8-Stage Shift-and-Store Bus Registers	✓	✓		✓	✓	SCHS063
CD4097B	24	Differential 8-Channel Analog Multiplexers/Demultiplexers	✓	✓	✓	✓	✓	SCHS052
CD4098B	16	Dual Monostable Multivibrators	✓	✓	✓		✓	SCHS065
CD4099B	16	8-Bit Addressable Latches	✓	✓	✓	✓	✓	SCHS066
CD4502B	16	Strobed Hex Inverters/Buffers	✓	✓	✓	✓	✓	SCHS067
CD4503B	16	Hex Buffers	✓	✓	✓	✓	✓	SCHS068
CD4504B	16	Hex Voltage-Level Shifters for TTL-to-CMOS or CMOS-to-CMOS Operation	✓	✓	✓		✓	SCHS069
CD4508B	24	Dual 4-Bit Latches	✓	✓	✓	✓	✓	SCHS070
CD4510B	16	Presetable BCD Up/Down Counters	✓	✓		✓	✓	SCHS071
CD4511B	16	BCD to 7-Segment Latch Decoder Drivers	✓	✓		✓	✓	SCHS072
CD4512B	16	8-Channel Data Selectors	✓	✓	✓	✓	✓	SCHS073
CD4514B	24	4-Bit Latches/4-to-16 Line Decoders	✓	✓	✓			SCHS074
CD4515B	24	4-Bit Latches/4-to-16 Line Decoders	✓	✓	✓			SCHS074
CD4516B	16	Presetable Binary Up/Down Counters	✓	✓		✓	✓	SCHS071

DEVICE SELECTION GUIDE

CD4000

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	TSSOP	
CD4517B	16	Dual 64-Stage Static Shift Registers	✓	✓				SCHS075
CD4518B	16	Dual BCD Up Counters	✓	✓	✓	✓	✓	SCHS076
CD4520B	16	Dual Binary Up Counters	✓	✓		✓	✓	SCHS076
CD4521B	16	24-Stage Frequency Dividers	✓	✓	✓	✓	✓	SCHS078
CD4522B	16	Programmable BCD Divide-by-N Counters	✓	✓	✓	✓	✓	SCHS079
CD4527B	16	BCD Rate Multipliers	✓	✓		✓	✓	SCHS080
CD4532B	16	8-Bit Priority Encoders	✓	✓	✓	✓	✓	SCHS082
CD4536B	16	Programmable Timers	✓	✓	✓	✓	✓	SCHS083
CD4541B	14	Programmable Timers	✓	✓	✓	✓	✓	SCHS085
CD4543B	16	BCD to 7-Segment Latches/Decoders/Drivers for Liquid-Crystal Displays	✓	✓	✓	✓	✓	SCHS086
CD4555B	16	Dual Binary 1-of-4 Decoders/Demultiplexers	✓	✓	✓	✓	✓	SCHS087
CD4556B	16	Dual Binary 1-of-4 Decoders/Demultiplexers	✓	✓	✓			SCHS087
CD4572UB	16	Hex Gates (4 Inverters, 2-Input NOR, 2-Input NAND)	✓	✓	✓	✓	✓	SCHS090
CD4585B	16	4-Bit Magnitude Comparators	✓	✓		✓	✓	SCHS091
CD4724B	16	8-Bit Addressable Latches	✓	✓		✓	✓	SCHS092
CD14538B	16	Dual-Precision Monostable Multivibrators	✓	✓	✓	✓	✓	SCHS093
CD40102B	16	2-Decade BCD Presettable Synchronous Down Counters	✓	✓		✓	✓	SCHS095
CD40103B	16	8-Bit Binary Presettable Synchronous Down Counters	✓	✓		✓	✓	SCHS095
CD40106B	14	Hex Schmitt Triggers	✓	✓	✓	✓	✓	SCHS096
CD40107B	8	Dual 2-Input NAND Buffers/Drivers	✓	✓	✓	✓	✓	SCHS097
CD40109B	16	Quad Low- to High-Voltage Level Shifters	✓	✓	✓	✓	✓	SCHS098
CD40110B	16	Decade Up-Down Counters/Latches/7-Segment Display Drivers	✓	✓				SCHS099
CD40117B	14	Programmable Dual 4-Bit Terminators	✓	✓	✓	✓	✓	SCHS100
CD40147B	16	10-Line to 4-Line BCD Priority Encoders	✓	✓	✓	✓	✓	SCHS102
CD40161B	16	Programmable 4-Bit Binary Counters with Asynchronous Clear	✓	✓		✓	✓	SCHS103
CD40174B	16	Hex D-Type Flip-Flops	✓	✓	✓	✓	✓	SCHS104
CD40175B	16	Quad D-Type Flip-Flops	✓	✓	✓	✓	✓	SCHS105
CD40192B	16	Presettable Binary Up/Down Counters with Dual Clock and Reset	✓	✓		✓	✓	SCHS106
CD40193B	16	Presettable Binary Up/Down Counters with Dual Clock and Reset	✓	✓		✓	✓	SCHS106
CD40194B	16	4-Bit Bidirectional Universal Shift Registers		✓		✓	✓	SCHS107
CD40257B	16	Quad 2-Line to 1-Line Data Selectors/Multiplexers	✓	✓	✓	✓	✓	SCHS108

74F

Fast Logic

74F logic is a general-purpose family of high-speed advanced bipolar logic. TI provides over 50 functions in the 74F family, including gates, buffers/drivers, bus transceivers, flip-flops, latches, counters, multiplexers, and demultiplexers.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

74F

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74F00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDFS035
SN74F02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓		SDFS036
SN74F04	14	Hex Inverters	✓	✓	✓	✓		SDFS037
SN74F08	14	Quad 2-Input AND Gates		✓	✓	✓	✓	SDFS038
SN74F10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓		SDFS039
SN74F11	14	Triple 3-Input AND Gates	✓	✓	✓	✓		SDFS040
SN74F20	14	Dual 4-Input NAND Gates	✓	✓	✓	✓		SDFS041
SN74F21	14	Dual 4-Input AND Gates		✓	✓			SDFS006
SN74F27	14	Triple 3-Input NOR Gates	✓	✓	✓	✓		SDFS042
SN74F30	14	8-Input NAND Gates	✓	✓	✓	✓		SDFS043
SN74F32	14	Quad 2-Input OR Gates	✓	✓	✓	✓		SDFS044
SN74F38	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDFS013
SN74F74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓		SDFS046
SN74F86	14	Quad 2-Input Exclusive-OR Gates		✓	✓	✓		SDFS019
SN74F109	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓	✓		SDFS047
SN74F112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset		✓	✓	✓		SDFS048
SN74F125	14	Quad Bus Buffers with 3-State Outputs		✓	✓	✓		SDFS016
SN74F126	14	Quad Bus Buffers with 3-State Outputs		✓	✓	✓		SDFS017
SN74F138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓		SDFS051
SN74F151B	16	1-of-8 Data Selectors/Multiplexers		✓	✓	✓		SDFS023
SN74F153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓	✓		SDFS052
SN74F157A	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		SDFS053
SN74F161A	16	Synchronous 4-Bit Binary Counters		✓	✓	✓	✓	SDFS056
SN74F163A	16	Synchronous 4-Bit Binary Counters		✓	✓	✓	✓	SDFS088
SN74F169	16	Synchronous 4-Bit Up/Down Binary Counters		✓	✓			SDFS089
SN74F174A	16	Hex D-Type Flip-Flops with Clear		✓	✓	✓		SDFS029
SN74F175	16	Quad D-Type Flip-Flops with Clear		✓	✓	✓		SDFS058
SN74F240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDFS061
SN74F241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDFS090
SN74F244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDFS063
SN74F245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	SDFS010
SN74F251B	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs		✓	✓			SDFS066

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74F253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDFS064
SN74F257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDFS065
SN74F258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		SDFS067
SN74F260	14	Dual 5-Input NOR Gates		✓	✓	✓		SDFS012
SN74F280B	14	9-Bit Odd/Even Parity Generators/Checkers		✓	✓	✓		SDFS008
SN74F283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓	✓		SDFS069
SN74F299	20	8-Bit Universal Shift/Storage Registers		✓	✓			SDFS071
SN74F373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	SDFS076
SN74F374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	SDFS077
SN74F377A	20	Octal D-Type Flip-Flops with Enable		✓	✓			SDFS018
SN74F520	20	8-Bit Identity Comparators ($P = \bar{Q}$) with Input Pullup Resistors		✓	✓			SDFS081
SN74F521	20	8-Bit Identity Comparators ($P = \bar{Q}$)	✓	✓	✓	✓		SDFS091
SN74F541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓		SDFS021
SN74F543	24	Octal Registered Transceivers with 3-State Outputs		✓	✓	✓	✓	SDFS025
SN74F573	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓			SDFS011
SN74F574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓		SDFS005
SN74F623	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓			SDFS087
SN74F657	24	Octal Bus Transceivers with Parity Generators/Checkers and 3-State Outputs		✓	✓			SDFS027
SN74F1016	20	16-Bit Schottky Barrier Diode R-C Bus-Termination Arrays			✓			SDFS093
SN74F1056	16	8-Bit Schottky Barrier Diode Bus-Termination Arrays			✓			SDFS085
SN74F2244	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs		✓	✓		✓	SDFS095
SN74F2245	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs		✓	✓		✓	SDFS099
SN74F2373	20	25-Ω Octal Transparent D-Type Latches with 3-State Outputs		✓	✓		✓	SDFS100

FB+/BTL

FutureBus+/ Backplane Transceiver Logic

The FB+ series of devices is designed for use in double-terminated high-speed bus applications and is fully compatible with IEEE Std 896-1991 (FutureBus+) and IEEE Std 1194.1-1991 (BTL). These transceivers are available in 7-, 8-, 9-, and 18-bit versions for 5-V CMOS or TTL-to-BTL and BTL-to-TTL translations. Other features include BTL drive up to 100 mA, low (5 pF to 6 pF maximum) B-port C_{iO} , t_{pd} performance below 5 ns, and B-port BIAS V_{CC} pins for live insertion.

One device, the 18-bit 'FB1653, offers 5-V CMOS, TTL- or LVTTTL-to-BTL and BTL-to-LVTTTL translations.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

FB+/BTL

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			MIL	QFP	TQFP	
SN74FB1650	100	18-Bit TTL/BTL Universal Storage Transceivers			✓	SCBS178
SN74FB1651	100	17-Bit TTL/BTL Universal Storage Transceivers with Buffered Clock Lines			✓	SCBS177
SN74FB1653	100	17-Bit LVTTTL/BTL Universal Storage Transceivers with Buffered Clock Lines			✓	SCBS702
SN74FB2031	52	9-Bit TTL/BTL Address/Data Transceivers	✓	✓		SCBS176
SN74FB2033K	52	8-Bit TTL/BTL Registered Transceivers		✓		SCBS472
SN74FB2040	52	8-Bit TTL/BTL Transceivers	✓	✓		SCBS173
SN74FB2041A	52	7-Bit TTL/BTL Transceivers		✓		SCBS172

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

FCT

Fast CMOS TTL Logic

The FCT product family is designed for high-current-drive bus-interface applications. The FCT family is fabricated using a CMOS 6- μm technology to provide up to 40-mA or 64-mA current sink capability, with typical propagation delays of 5 ns (CD74FCT245). The family is optimized to operate at 5 V and is pin-function compatible with most standard bipolar and CMOS logic families.

The FCT family of devices has several features for efficient bus interfacing. The family does not have input or output diodes to V_{CC} , and most FCT devices have 3-state outputs. Bus noise is minimized with 1-V, or less, typical ground bounce (V_{olp} , 5-V V_{CC} , 25°C) and limited output voltage swing (3.5 V typical).

The FCT family includes 8-, 9-, and 10-bit bus-interface devices.

Key features:

- 5-V operation
- 5-ns typical propagation delay (CD74FCT245)
- Low quiescent power consumption
- 1-V typical V_{olp}

TI's FCT family was acquired from Harris Semiconductor in December 1998.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

FCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY29FCT52CT	24	Octal Registered Transceivers with 3-State Outputs			✓	✓	✓			SCCS010
CY74FCT138AT	16	1-of-8 Decoders			✓	✓	✓			SCCS013
CY74FCT138CT	16	1-of-8 Decoders	✓		✓	✓	✓			SCCS013
CY74FCT138T	16	1-of-8 Decoders			✓	✓	✓			SCCS013
CY74FCT157AT	16	Quad 2-Input Multiplexers			✓	✓	✓			SCCS014
CY74FCT157CT	16	Quad 2-Input Multiplexers			✓	✓	✓			SCCS014
CY74FCT163CT	16	Synchronous 4-Bit Binary Counters			✓	✓	✓			SCCS015
CY74FCT163T	16	Synchronous 4-Bit Binary Counters	✓							SCCS015
CY74FCT191AT	16	Presetable Synchronous 4-Bit Up/Down Binary Counters				✓				SCCS016
CY74FCT191CT	16	Presetable Synchronous 4-Bit Up/Down Binary Counters			✓	✓	✓			SCCS016
CY74FCT240AT	20	Octal Buffers/Drivers with 3-State Outputs	✓		✓	✓	✓			SCCS017
CY74FCT240CT	20	Octal Buffers/Drivers with 3-State Outputs			✓	✓	✓			SCCS017
CY74FCT240T	20	Octal Buffers/Drivers with 3-State Outputs			✓	✓	✓			SCCS017
CD74FCT244	20	Octal Buffers and Line Drivers with 3-State Outputs		✓		✓				SCHS270
CD74FCT244AT	20	Octal Buffers and Line Drivers with 3-State Outputs		✓						SCHS270
CY74FCT244AT	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓				SCCS017
CY74FCT244CT	20	Octal Buffers and Line Drivers with 3-State Outputs	✓		✓	✓	✓			SCCS017
CY74FCT244DT	20	Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓			SCCS017
CY74FCT244T	20	Octal Buffers and Line Drivers with 3-State Outputs	✓		✓	✓	✓			SCCS017
CD74FCT245	20	Octal Bus Transceivers with 3-State Outputs		✓		✓				SCHS271
CY74FCT245AT	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓			SCCS018
CY74FCT245CT	20	Octal Bus Transceivers with 3-State Outputs	✓		✓	✓	✓			SCCS018
CY74FCT245DT	20	Octal Bus Transceivers with 3-State Outputs			✓		✓			SCCS018
CY74FCT245T	20	Octal Bus Transceivers with 3-State Outputs	✓		✓	✓	✓			SCCS018
CY74FCT257AT	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs			✓		✓			SCCS019
CY74FCT257CT	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs			✓	✓	✓			SCCS019
CY74FCT257T	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs			✓		✓			SCCS019
CD74FCT273	20	Octal D-Type Flip-Flops with Clear		✓		✓				SCHS254
CY74FCT273AT	20	Octal D-Type Flip-Flops with Clear	✓		✓	✓	✓			SCCS020
CY74FCT273CT	20	Octal D-Type Flip-Flops with Clear			✓	✓	✓			SCCS020
CY74FCT273T	20	Octal D-Type Flip-Flops with Clear			✓	✓	✓			SCCS020
CY74FCT373AT	20	Octal Transparent D-Type Latches with 3-State Outputs	✓		✓	✓	✓			SCCS021
CY74FCT373CT	20	Octal Transparent D-Type Latches with 3-State Outputs			✓	✓	✓			SCCS021
CY74FCT373T	20	Octal Transparent D-Type Latches with 3-State Outputs				✓				SCCS021
CD74FCT374	20	Octal Transparent D-Type Latches with 3-State Outputs		✓		✓				SCHS256
CY74FCT374AT	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓			SCCS022
CY74FCT374CT	20	Octal Transparent D-Type Latches with 3-State Outputs	✓		✓	✓	✓			SCCS022
CY74FCT374T	20	Octal Transparent D-Type Latches with 3-State Outputs	✓		✓	✓	✓			SCCS022
CY74FCT377AT	20	Octal D-Type Flip-Flops with Enable			✓	✓	✓			SCCS023
CY74FCT377CT	20	Octal D-Type Flip-Flops with Enable	✓		✓	✓	✓			SCCS023
CY74FCT377T	20	Octal D-Type Flip-Flops with Enable			✓		✓			SCCS023

commercial package description and availability

schedule

- ✓ = Now
+ = Planned

See Appendix A for package information.



DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY74FCT399AT	16	Quad 2-Input Multiplexers with Storage				✓	✓			SCCS024
CY74FCT399CT	16	Quad 2-Input Multiplexers with Storage				✓				SCCS024
CY74FCT480AT	24	Dual 8-Bit Parity Generators/Checkers		✓	✓		✓			SCCS025
CY74FCT480BT	24	Dual 8-Bit Parity Generators/Checkers	✓	✓	✓	✓	✓			SCCS025
CY29FCT520AT	24	8-Bit Multi-Level Pipeline Registers		✓		✓				SCCS011
CY29FCT520BT	24	8-Bit Multi-Level Pipeline Registers				✓				SCCS011
CY29FCT520CT	24	8-Bit Multi-Level Pipeline Registers				✓				SCCS011
CD74FCT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs		✓		✓				SCHS257
CY74FCT540CT	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs			✓		✓			SCCS029
CD74FCT541	20	Octal Buffers and Line Drivers with 3-State Outputs		✓		✓				SCHS257
CY74FCT541AT	20	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓			SCCS029
CY74FCT541CT	20	Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓			SCCS029
CY74FCT541T	20	Octal Buffers and Line Drivers with 3-State Outputs				✓				SCCS029
CD74FCT543	24	Octal Registered Transceivers with 3-State Outputs		✓		✓				SCHS258
CY74FCT543AT	24	Octal Registered Transceivers with 3-State Outputs			✓	✓	✓			SCCS030
CY74FCT543CT	24	Octal Registered Transceivers with 3-State Outputs			✓	✓	✓			SCCS030
CY74FCT543T	24	Octal Registered Transceivers with 3-State Outputs	✓		✓	✓	✓			SCCS030
CD74FCT564	20	Octal Inverting D-Type Flip-Flops with 3-State Outputs		✓		✓				SCHS259
CD74FCT573	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓			SCHS260
CD74FCT573AT	20	Octal Transparent D-Type Latches with 3-State Outputs		✓						SCHS260
CY74FCT573AT	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓			SCCS021
CY74FCT573CT	20	Octal Transparent D-Type Latches with 3-State Outputs			✓	✓	✓			SCCS021
CY74FCT573T	20	Octal Transparent D-Type Latches with 3-State Outputs			✓	✓	✓			SCCS021
CD74FCT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓		✓				SCHS259
CY74FCT574AT	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓		✓	✓	✓			SCCS022
CY74FCT574CT	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs			✓	✓	✓			SCCS022
CY74FCT574T	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs			✓	✓	✓			SCCS022
CD74FCT623	20	Octal Bus Transceivers with 3-State Outputs				✓				SCHS296
CY74FCT646AT	24	Octal Registered Bus Transceivers with 3-State Outputs			✓	✓	✓			SCCS031
CY74FCT646CT	24	Octal Registered Bus Transceivers with 3-State Outputs	✓		✓	✓	✓			SCCS031
CY74FCT646T	24	Octal Registered Bus Transceivers with 3-State Outputs			✓	✓	✓			SCCS031
CY74FCT652AT	24	Octal Bus Transceivers and Registers with 3-State Outputs			✓	✓	✓			SCCS032
CY74FCT652CT	24	Octal Bus Transceivers and Registers with 3-State Outputs			✓	✓	✓			SCCS032
CY74FCT652T	24	Octal Bus Transceivers and Registers with 3-State Outputs			✓		✓			SCCS032
CY29FCT818AT	24	Diagnostic Scan Registers	✓							SCCS012
CY29FCT818CT	24	Diagnostic Scan Registers		✓	✓	✓	✓			SCCS012
CY74FCT821AT	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs			✓	✓	✓			SCCS033
CY74FCT821BT	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs		✓		✓				SCCS033
CY74FCT821CT	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs			✓	✓	✓			SCCS033
CY74FCT823AT	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs		✓	✓	✓	✓			SCCS033
CY74FCT823BT	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs		✓						SCCS033
CY74FCT823CT	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs			✓	✓	✓			SCCS033
CY74FCT825CT	24	8-Bit Bus-Interface Flip-Flops with 3-State Outputs			✓		✓			SCCS033
CY74FCT827AT	24	10-Bit Buffers/Drivers with 3-State Outputs			✓	✓	✓			SCCS034
CY74FCT827CT	24	10-Bit Buffers/Drivers with 3-State Outputs			✓	✓	✓			SCCS034

DEVICE SELECTION GUIDE

FCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY74FCT841AT	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs	✓			✓				SCCS035
CY74FCT841BT	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs		✓						SCCS035
CY74FCT841CT	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs			✓	✓	✓			SCCS035
CD74FCT843A	24	9-Bit Bus-Interface D-Type Latches with 3-State Outputs				✓				SCHS267
CY74FCT2240AT	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS036
CY74FCT2240CT	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS036
CY74FCT2240T	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs				✓				SCCS036
CY74FCT2244AT	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS036
CY74FCT2244CT	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS036
CY74FCT2244T	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS036
CY74FCT2245AT	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs		✓	✓	✓	✓			SCCS037
CY74FCT2245CT	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS037
CY74FCT2245T	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS037
CY74FCT2257AT	16	Quad 1-of-2 Data Selectors/Multiplexers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS038
CY74FCT2257CT	16	Quad 1-of-2 Data Selectors/Multiplexers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS038
CY74FCT2373AT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS039
CY74FCT2373CT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS039
CY74FCT2373T	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS039
CY74FCT2374AT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS040
CY74FCT2374CT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS040
CY74FCT2374T	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs				✓				SCCS040
CY74FCT2541AT	20	Octal Line Drivers/MOS Drivers with 3-State Outputs			✓	✓	✓			SCCS041
CY74FCT2541CT	20	Octal Line Drivers/MOS Drivers with 3-State Outputs			✓	✓	✓			SCCS041
CY74FCT2541T	20	Octal Line Drivers/MOS Drivers with 3-State Outputs			✓	✓	✓			SCCS041
CY74FCT2543AT	24	Octal Registered Transceivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS042
CY74FCT2543CT	24	Octal Registered Transceivers with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS042
CY74FCT2543T	24	Octal Registered Transceivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS042
CY74FCT2573AT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS039

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY74FCT2573CT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS039
CY74FCT2573T	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs				✓				SCCS039
CY74FCT2574AT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS040
CY74FCT2574CT	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs			✓	✓	✓			SCCS040
CY74FCT2574T	20	Octal Transparent D-Type Latches with Series Damping Resistors and 3-State Outputs				✓				SCCS040
CY74FCT2646AT	24	Octal Registered Bus Transceivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS043
CY74FCT2646CT	24	Octal Registered Bus Transceivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS043
CY74FCT2652AT	24	Octal Bus Transceivers and Registers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS044
CY74FCT2652CT	24	Octal Bus Transceivers and Registers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS044
CY74FCT2827AT	24	10-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS045
CY74FCT2827CT	24	10-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs			✓		✓			SCCS045
CD74FCT2952A	24	Octal Bus Transceivers and Registers with 3-State Outputs				✓				SCBS720
CY74FCT16240AT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓			SCCS027
CY74FCT16244AT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT16244CT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT16244T	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT16245AT	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT16245CT	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT16245T	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT16373AT	48	16-Bit Transparent D-Type Latches with 3-State Outputs					✓	✓	✓	SCCS054
CY74FCT16373CT	48	16-Bit Transparent D-Type Latches with 3-State Outputs					✓	✓	✓	SCCS054
CY74FCT16374AT	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS055
CY74FCT16374CT	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS055
CY74FCT16374T	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓			SCCS055
CY74FCT16500CT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓	✓		SCCS056
CY74FCT16501AT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓			SCCS057
CY74FCT16543AT	56	16-Bit Registered Transceivers with 3-State Outputs						✓		SCCS059
CY74FCT16543CT	56	16-Bit Registered Transceivers with 3-State Outputs					✓			SCCS059
CY74FCT16543T	56	16-Bit Registered Transceivers with 3-State Outputs					✓			SCCS059
CY74FCT16646AT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS060
CY74FCT16646CT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS060
CY74FCT16646T	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS060
CY74FCT16652AT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS061
CY74FCT16652CT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS061
CY74FCT16823AT	56	18-Bit D-Type Flip-Flops with 3-State Outputs						✓		SCCS062
CY74FCT16823CT	56	18-Bit D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS062

DEVICE SELECTION GUIDE

FCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY74FCT16827AT	56	20-Bit Buffers/Drivers with 3-State Outputs					✓			SCCS064
CY74FCT16827CT	56	20-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS064
CY74FCT16841AT	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs					✓			SCCS067
CY74FCT16841CT	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs					✓			SCCS067
CY74FCT16952AT	56	16-Bit Registered Transceivers with 3-State Outputs					✓			SCCS065
CY74FCT16952CT	56	16-Bit Registered Transceivers with 3-State Outputs						✓		SCCS065
CY74FCT162240CT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS027
CY74FCT162244AT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT162244CT	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT162244T	48	16-Bit Buffers/Drivers with 3-State Outputs					✓	✓		SCCS028
CY74FCT162H244AT	48	16-Bit Buffers/Drivers with Bus Hold and 3-State Outputs						✓		SCCS028
CY74FCT162H244CT	48	16-Bit Buffers/Drivers with Bus Hold and 3-State Outputs					✓			SCCS028
CY74FCT162245AT	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT162245CT	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT162245T	48	16-Bit Bus Transceivers with 3-State Outputs					✓	✓		SCCS026
CY74FCT162H245AT	48	16-Bit Bus Transceivers with Bus Hold and 3-State Outputs					✓	✓		SCCS026
CY74FCT162H245CT	48	16-Bit Bus Transceivers with Bus Hold and 3-State Outputs					✓	✓		SCCS026
CY74FCT162373AT	48	16-Bit Transparent D-Type Latches with 3-State Outputs					✓	✓		SCCS054
CY74FCT162373CT	48	16-Bit Transparent D-Type Latches with 3-State Outputs					✓	✓		SCCS054
CY74FCT162374AT	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS055
CY74FCT162374CT	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS055
CY74FCT162374T	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs					✓			SCCS055
CY74FCT162500AT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓			SCCS056
CY74FCT162500CT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓			SCCS056
CY74FCT162501AT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓	✓		SCCS057
CY74FCT162501CT	56	18-Bit Universal Bus Transceivers with 3-State Outputs					✓	✓		SCCS057
CY74FCT162H501CT	56	18-Bit Universal Bus Transceivers with Bus Hold and 3-State Outputs					✓	✓		SCCS057
CY74FCT162543AT	56	16-Bit Registered Transceivers with 3-State Outputs						✓		SCCS059
CY74FCT162543CT	56	16-Bit Registered Transceivers with 3-State Outputs					✓	✓		SCCS059
CY74FCT162543T	56	16-Bit Registered Transceivers with 3-State Outputs					✓			SCCS059
CY74FCT162H543CT	56	16-Bit Registered Transceivers with Bus Hold and 3-State Outputs						✓		SCCS059
CY74FCT162646AT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓	✓		SCCS060
CY74FCT162646CT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓	✓		SCCS060
CY74FCT162652AT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓			SCCS061
CY74FCT162652CT	56	16-Bit Bus Transceivers and Registers with 3-State Outputs					✓	✓		SCCS061
CY74FCT162823AT	56	18-Bit D-Type Flip-Flops with 3-State Outputs						✓		SCCS062
CY74FCT162823CT	56	18-Bit D-Type Flip-Flops with 3-State Outputs					✓	✓		SCCS062
CY74FCT162827AT	56	20-Bit Buffers/Drivers with 3-State Outputs					✓			SCCS064
CY74FCT162827BT	56	20-Bit Buffers/Drivers with 3-State Outputs					✓			SCCS064
CY74FCT162827CT	56	20-Bit Buffers/Drivers with 3-State Outputs						✓		SCCS064
CY74FCT162841CT	56	20-Bit Bus-Interface D-Type Latches with 3-State Outputs					✓	✓		SCCS067
CY74FCT162952AT	56	16-Bit Registered Transceivers with 3-State Outputs						✓		SCCS065
CY74FCT162952BT	56	16-Bit Registered Transceivers with 3-State Outputs					✓			SCCS065

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	QSOP	SOIC	SSOP	TSSOP	TVSOP	
CY74FCT162H952AT	56	16-Bit Registered Transceivers with Bus Hold and 3-State Outputs						✓		SCCS065
CY74FCT162H952CT	56	16-Bit Registered Transceivers with Bus Hold and 3-State Outputs					✓			SCCS065

FIFO

First-In, First-Out Memories

Today's competitive environment creates a constant need for greater system performance. One common method to optimize system performance involves the use of a first-in, first-out (FIFO) memory to eliminate the data bottlenecks common between digital signal processors (DSPs), high-speed processors, industry-standard buses, memory devices, and analog front ends (AFEs). TI offers a wide range of FIFO devices designed for use in a variety of systems, including real-time DSP applications, telecommunications, internetworking, medical/industrial imaging, precision instrumentation, and high-bandwidth computing.

New DSP-Sync FIFO Products

Designed to work directly with TI DSPs that drive today's digital revolution, TI's new DSP-sync FIFOs provide a glueless DSP interface and offer the features necessary to enhance your DSP-based system designs. These new DSP-sync FIFOs leverage TI's most advanced processing technology to create world-class FIFO performance and set new levels in cost efficiency.

Visit the TI FIFO home page at <http://www.ti.com/sc/docs/products/fifo/fifo.htm> for a comprehensive overview of TI's FIFO product line, new product releases, data sheets, application reports, and pricing.

DEVICE SELECTION GUIDE

FIFO

DEVICE	NO. PINS	CLOCK (MHz)	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
				MIL	PDIP	SOIC	SSOP	PLCC	QFP	LQFP	TQFP	LFBGA	
36-Bit Synchronous FIFOs													
SN74ABT3612	132, 120	67	64 × 36 × 2, 5-V Synchronous Bidirectional FIFOs						✓		✓		SCBS129
SN74ABT3614	132, 120	67	64 × 36 × 2, 5-V Synchronous Bidirectional FIFOs	✓					✓		✓		SCBS126
SN74ACT3622	132, 120	67	256 × 36 × 2, 5-V Synchronous Bidirectional FIFOs						✓		✓		SCAS247
SN74ACT3631	132, 120	67	512 × 36, 5-V Synchronous FIFOs						✓		✓		SCAS246
SN74ACT3632	132, 120	67	512 × 36 × 2, 5-V Synchronous Bidirectional FIFOs	✓					✓		✓		SCAS224
SN74ACT3641	132, 120	67	1K × 36, 5-V Synchronous FIFOs	✓					✓		✓		SCAS338
SN74ACT3651	132, 120	67	2K × 36, 5-V Synchronous FIFOs						✓		✓		SCAS439
SN74V3640	128	166	1024 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668
SN74V3650	128	166	2048 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668
SN74V3660	128	166	4096 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668
SN74V3670	128	166	8192 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668
SN74V3680	128	166	16384 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668
SN74V3690	128	166	32768 × 36, 3.3-V Synchronous FIFOs								✓		SCAS668

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



DEVICE	NO. PINS	CLOCK (MHz)	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
				MIL	PDIP	SOIC	SSOP	PLCC	QFP	LQFP	TQFP	LFBGA	
18-Bit Synchronous FIFOs													
SN74ACT7813	56	67	64 × 18, 5-V Synchronous FIFOs				✓						SCAS199
SN74ACT7805	56	67	256 × 18, 5-V Synchronous FIFOs				✓						SCAS201
SN74ACT7803	56	67	512 × 18, 5-V Synchronous FIFOs				✓						SCAS191
SN74ACT7811	68, 80	67	1K × 18, 5-V Synchronous FIFOs	✓				✓			✓		SCAS151
SN74ACT7881	68, 80	67	1K × 18, 5-V Synchronous FIFOs	✓				✓			✓		SCAS227
SN74ACT7882	68, 80	67	2K × 18, 5-V Synchronous FIFOs					✓			✓		SCAS445
SN74ALVC7813	56	50	64 × 18, 3.3-V Synchronous FIFOs				✓						SCAS594
SN74ALVC7805	56	50	256 × 18, 3.3-V Synchronous FIFOs				✓						SCAS593
SN74ALVC7803	56	50	512 × 18, 3.3-V Synchronous FIFOs				✓						SCAS436
SN74V215	64	133	512 × 18, 3.3-V Synchronous FIFOs								✓		SCAS636
SN74V225	64	133	1K × 18, 3.3-V Synchronous FIFOs								✓		SCAS636
SN74V235	64	133	2K × 18, 3.3-V Synchronous FIFOs								✓		SCAS636
SN74V245	64	133	4K × 18, 3.3-V Synchronous FIFOs								✓		SCAS636
SN74V263	80, 100	166	8K × 18/16K × 9, 3.3-V Synchronous FIFOs							✓		+	SCAS669
SN74V273	80, 100	166	16K × 18/32K × 9, 3.3-V Synchronous FIFOs							✓		+	SCAS669
SN74V283	80, 100	166	32K × 18/64K × 9, 3.3-V Synchronous FIFOs							✓		+	SCAS669
SN74V293	80, 100	166	64K × 18/128K × 9, 3.3-V Synchronous FIFOs							✓		+	SCAS669
18-Bit Asynchronous FIFOs													
SN74ACT7814	56	50	64 × 18, 5-V Asynchronous FIFOs				✓						SCAS209
SN74ACT7806	56	50	256 × 18, 5V Asynchronous FIFOs0				✓						SCAS438
SN74ACT7804	56	50	512 × 18, 5-V Asynchronous FIFOs				✓						SCAS204
SN74ABT7820	80	67	512 × 18 × 2, 5-V Asynchronous Bidirectional FIFOs	✓					✓		✓		SCAS206
SN74ACT7802	80	40	1K × 18, 5-V Asynchronous FIFOs					✓			✓		SCAS187
SN74ALVC7814	56	40	64 × 18, 3.3-V Asynchronous FIFOs				✓						SCAS592
SN74ALVC7806	56	40	256 × 18, 3.3-V Asynchronous FIFOs				✓						SCAS591
SN74ALVC7804	56	40	512 × 18, 3.3-V Asynchronous FIFOs				✓						SCAS437
9-Bit FIFOs													
SN74ACT2235	44, 64	50	1K × 9 × 2, 5-V Asynchronous Bidirectional FIFOs					✓			✓		SCAS148
SN74ACT7807	44, 64	67	2K × 9, 5-V Synchronous FIFOs					✓			✓		SCAS200
SN74ACT7808	44, 64	50	2K × 9, 5-V Asynchronous FIFOs					✓			✓		SCAS205

DEVICE SELECTION GUIDE

FIFO

DEVICE	NO. PINS	CLOCK (MHz)	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
				MIL	PDIP	SOIC	SSOP	PLCC	QFP	LQFP	TQFP	LFBGA	
1-Bit Telecommunication FIFOs													
SN74ACT2226	24	22	64 × 1 × 2, 5-V Independent Synchronous FIFOs			✓							SCAS219
SN74ACT2227	28	60	64 × 1 × 2, 5-V Independent Synchronous FIFOs			✓							SCAS220
SN74ACT2228	24	22	256 × 1 × 2, 5-V Independent Synchronous FIFOs			✓							SCAS219
SN74ACT2229	28	60	256 × 1 × 2, 5-V Independent Synchronous FIFOs			✓							SCAS220
Mature Products													
SN74LS224A	16	10	16 × 4, 5-V Synchronous FIFOs	✓	✓								SDLS023
SN74ALS232B	16, 20	40	16 × 4, 5-V Asynchronous FIFOs		✓	✓		✓					SCAS251
SN74ALS236	16	30	16 × 4, 5-V Asynchronous FIFOs		✓								SDAS107
CD40105B	16	3	16 × 4, 5-V Asynchronous FIFOs	✓	✓								SCHS096
CD74HC40105	16	12	16 × 4, 5-V Asynchronous FIFOs	✓	✓	✓							SCHS222
CD74HCT40105	16	12	16 × 4, 5-V Asynchronous FIFOs	✓	✓	✓							SCHS222
SN74S225	20	10	16 × 5, 5-V Asynchronous FIFOs		✓								SDLS207
SN74ALS229B	20	40	16 × 5, 5-V Asynchronous FIFOs		✓	✓							SDAS090

GTL

Gunning Transceiver Logic

GTL devices are high-speed transceivers operating at LVTTTL logic levels on the A port and at GTL/GTL+ signal levels on the B port. The devices are designed with faster edge rates for point-to-point applications in which hot insertion is not a requirement. The devices operate at the JEDEC JESD8-3 GTL or at the higher threshold-voltage/lower noise-margin GTL+ signal levels. Use GTLP devices in applications that require a slower edge rate for optimal signal-integrity performance.

GTL family features:

- 3.3-V or 3.3-/5-V V_{CC} operation with 5-V-tolerant LVTTTL I/Os (except 'GTL1655) permits the devices to act as 5-V CMOS/TTL or 3.3-V LVTTTL-to-GTL+/GTL and GTL+/GTL-to-3.3-V LVTTTL translators.
- OEC™ circuitry reduces line reflections, electromagnetic interference (EMI), and improves overall signal integrity.
- B-port drive of 50 mA and 100 mA ('GTL1655 only) allows the designer flexibility in matching the device to the application.
- I_{off} circuitry prevents damage during partial-power-down situations.
- Power-up 3-state (PU3S) and BIAS V_{CC} circuitry ('GTL1655 only) permit true live-insertion capability.
- Bus-hold circuitry (A port only) eliminates floating inputs by holding them at the last valid logic state. No external pullup or pulldown resistors are needed for unused or undriven inputs, which reduces power, cost, and board layout time.

See <http://www.ti.com/sc/gtl> for further information. TI provides a wide range of design assistance, including application support, application reports, free samples, demonstration backplane, and HSPICE/IBIS simulation models.

DEVICE SELECTION GUIDE

GTL

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			MIL	SSOP	TSSOP	
SN74GTL1655	64	16-Bit LVTTL-to-GTL/GTL+ Universal Bus Transceivers with Live Insertion			✓	SCBS696
SN74GTL16612	56	18-Bit LVTTL-to-GTL/GTL+ Universal Bus Transceivers	✓	✓	✓	SCBS480
SN74GTL16616	56	17-Bit LVTTL-to-GTL/GTL+ Universal Bus Transceivers with Buffered Clock Outputs		✓	✓	SCBS481
SN74GTL16622A	64	18-Bit LVTTL-to-GTL/GTL+ Registered Bus Transceivers			✓	SCBS673
SN74GTL16923	64	18-Bit LVTTL-to-GTL/GTL+ Registered Bus Transceivers			✓	SCBS674
SN74GTL2006	28	18-Bit GTL-/GTL/GTL+ to LVTTL Translators			✓	SCES619

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

GTLP

Gunning Transceiver Logic Plus

GTLP devices are high-speed CMOS transceivers specifically designed for heavily loaded parallel backplane applications. The reduced output swing (<1 V), reduced input threshold levels, differential input, and OEC™ and TI-OPC™ circuitry on the GTLP rising and falling edges reduces EMI and improves overall signal integrity, allowing higher backplane clock frequencies. This increases the bandwidth for manufacturers developing improved data-communication solutions.

GTLP solves high-performance parallel backplane designers' needs:

- Offers higher backplane data rates (100+ Mbps) for increased data-throughput requirements, lower EMI, and lower power consumption
- I_{off} , power-up 3-state (PU3S), and BIAS V_{CC} circuitry support true live-insertion capability for easy internal precharging of the backplane I/O pins for applications in which active backplane data cannot be suspended or disturbed during card insertion or removal.


GTLP family features:

- 3.3-V V_{CC} with 5-V-tolerant LVTTTL I/Os permits GTLP devices to act as 5-V CMOS, TTL, or LVTTTL-to-GTLP and GTLP-to-LVTTTL or TTL translators.
- A-port (LVTTTL side) balanced drive of ± 24 mA
- B-port (GTLP side) open drain sinks either 50 mA or 100 mA of current, allowing the designer flexibility in matching the best device to the backplane characteristics, which are dependent on the length, slot spacing, and distributed capacitance (among other factors).
- Edge-rate control (ERC) circuitry allows either fast or slow edge rates.
- One-third the static power consumption of BiCMOS logic devices
- A-port bus-hold circuitry (GTLPH only) eliminates floating inputs by holding them at the last valid logic state.

See <http://www.ti.com/sc/gtlp> for further information. TI provides a wide range of design assistance, including application reports and support, free samples, demonstration backplane, and HSPICE/IBIS simulation models.


Migration Path From GTLPH16912

MEDIUM-DRIVE UNIVERSAL BUS TRANSCEIVER
 '16601 Pinout – 18 Bits With OE, LE, CLK, and CE Controls

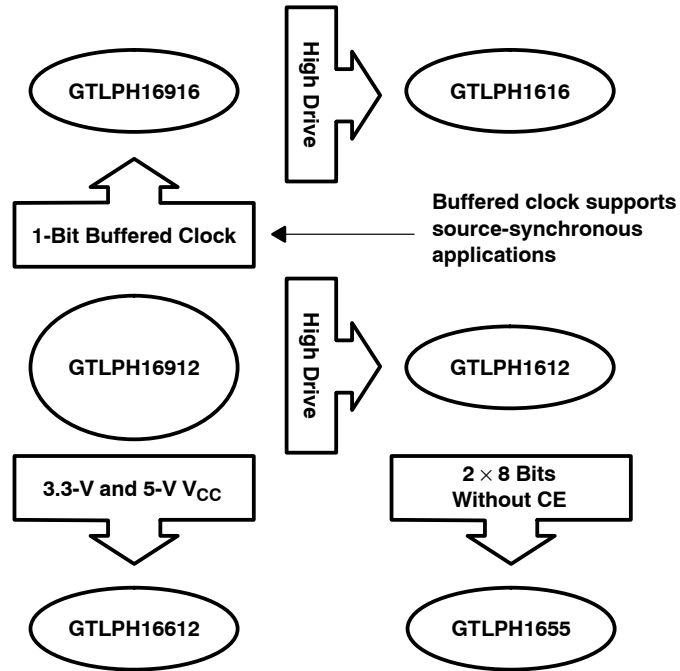

Migration Path From GTLPH16945

MEDIUM-DRIVE BUS TRANSCEIVER
 '16245 Pinout – 2 × 8 Bits With Separate DIR and OE Controls

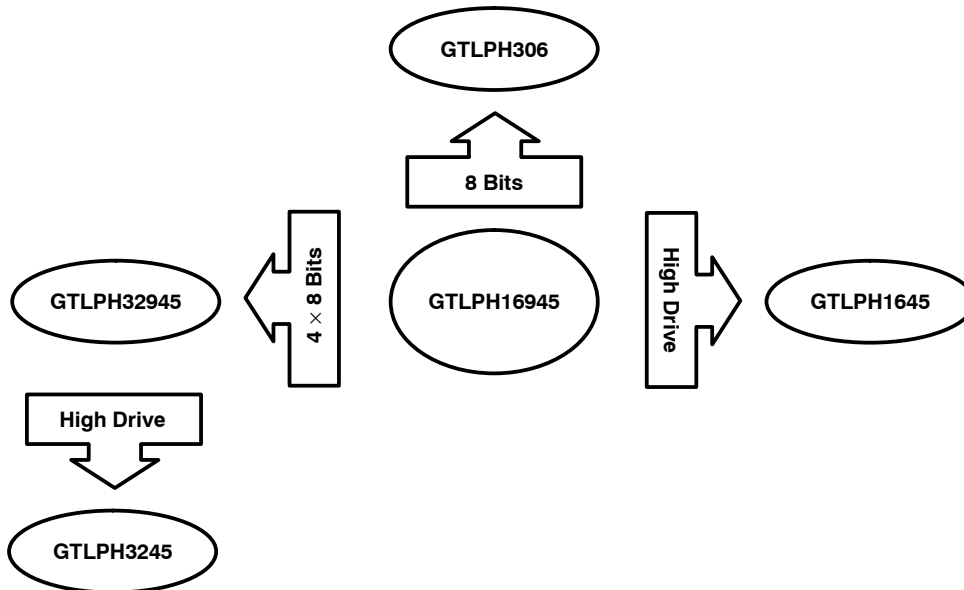

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			LFBGA	QFN	SOIC	SSOP	TSSOP	TVSOP	VFBGA	
SN74GTLPH306	24	8-Bit LVTTTL-to-GTLP Bus Transceivers			✓		✓	✓		SCES284
SN74GTLPH817	24	GTLP-to-LVTTTL 1-to-6 Fanout Drivers			✓		✓	✓		SCES285
SN74GTLPH1394	16	2-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers with Selectable Polarity		✓	✓		✓	✓		SCES286
SN74GTLPH1395	20	Dual 1-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers with Split LVTTTL Port, Feedback Path, and Selectable Polarity			✓		✓	✓	✓	SCES349
SN74GTLPH1612	64	18-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers					✓			SCES287
SN74GTLPH1616	64	17-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers with Buffered Clock Outputs					✓			SCES346
SN74GTLPH1627	64	18-Bit LVTTTL-to-GTLP Bus Transceivers with Source-Synchronous Clock Outputs					✓			SCES356
SN74GTLPH1645	56	16-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers					✓	✓	✓	SCES290
SN74GTLPH1655	64	16-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Universal Bus Transceivers					✓			SCES294
SN74GTLPH2033	48	8-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Registered Transceivers with Split LVTTTL Port and Feedback Path					✓	✓	✓	SCES352
SN74GTLPH2034	48	8-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Registered Transceivers with Split LVTTTL Port and Feedback Path					✓	✓	✓	SCES353
SN74GTLPH3245	114	32-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers	✓							SCES291
SN74GTLPH16612	56	18-Bit LVTTTL to GTLP Universal Bus Transceivers				✓	✓			SCES326
SN74GTLPH16912	56	18-Bit LVTTTL-to-GTLP Universal Bus Transceivers					✓	✓		SCES288
SN74GTLPH16916	56	17-Bit LVTTTL-to-GTLP Universal Bus Transceivers with Buffered Clock Outputs					✓	✓		SCES347
SN74GTLPH16927	56	18-Bit LVTTTL-to-GTLP Bus Transceivers with Source-Synchronous Clock Outputs					✓	✓	✓	SCES413
SN74GTLPH16945	48/56	16-Bit LVTTTL-to-GTLP Bus Transceivers					✓	✓	+	SCES292
SN74GTLPH21395	20	Dual 1-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Bus Transceivers with Split LVTTTL Port, Feedback Path, and Selectable Polarity			✓		✓	✓	✓	SCES350

commercial package description and availability
DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✦ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

DEVICE SELECTION GUIDE



GTLP

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			LFBGA	QFN	SOIC	SSOP	TSSOP	TVSOP	VFBGA	
SN74GTLP22033	48/56	8-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Registered Transceivers with Split LVTTTL Port and Feedback Path					✓	✓	✓	SCES354
SN74GTLP22034	48/56	8-Bit LVTTTL-to-GTLP Adjustable-Edge-Rate Registered Transceivers with Split LVTTTL Port and Feedback Path					✓	✓	✓	SCES355
SN74GTLP32912	96	36-Bit LVTTTL-to-GTLP Universal Bus Transceivers	✓							SCES379
SN74GTLP32916	96	34-Bit LVTTTL-to-GTLP Universal Bus Transceivers with Buffered Clock Outputs	✓							SCES380
SN74GTLP32945	96	32-Bit LVTTTL-to-GTLP Bus Transceivers	✓							SCES293

SN74GTLP1394


Specifically designed for use with the Texas Instruments TSB14AA1 1394 backplane layer controller family to transmit 1394 backplane serial bus across parallel backplanes

- ◆ The 1394 backplane serial bus plays a supportive role in backplane systems, providing a means for diagnostics, system enhancement, and peripheral monitoring.
- ◆ High-performance, multi-slot, parallel-backplane-optimized GTLP edge rates easily support data transfer rates of 25 Mbps (S25), 50 Mbps (S50), and 100 Mbps (S100).
- ◆ GTLP vs LVDS solutions
 - ◆ Single-chip solution
 - ◆ Easier to implement
- ◆ GTLP vs BTL/FB+ solutions
 - ◆ Better signal integrity
 - ◆ More cost effective
 - ◆ Less power consumption

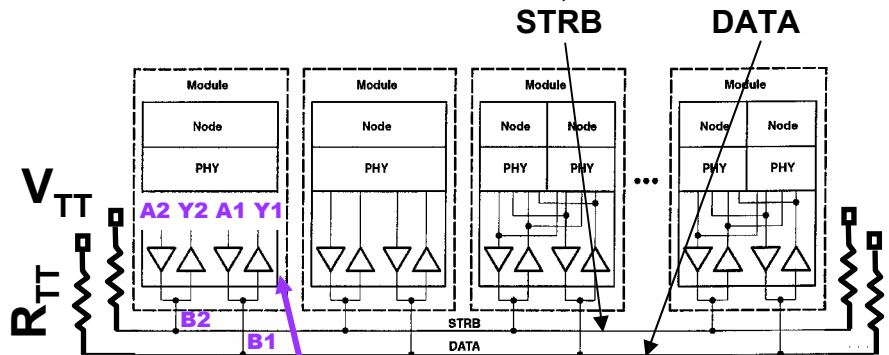
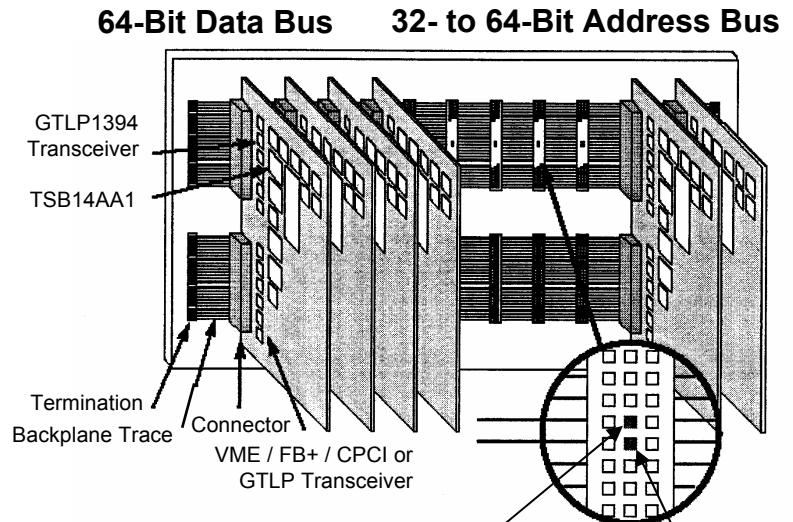


SN74GTLP1394 main features include:

- LVTTTL to GTLP bidirectional translator
- High GTLP drive (100 mA)
- TI-OPC™ overshoot protection circuitry
- BIAS V_{CC} supports true live insertion.
- 3.3-V V_{CC} with 5-V tolerance
- \$3.75 in lots of 1000
- 16-pin SOIC (D & DR), TSSOP (PWR), and TVSOP (DGVR) packages

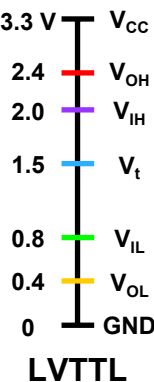

SN74GTLP1394



www.ti.com/sc/1394

www.ti.com/sc/gtlp

HC/HCT

High-Speed CMOS Logic

TI offers a full family of HC/HCT devices for low-power, medium- to low-speed applications. The recent addition of products acquired from Harris Semiconductor has added a wide range of additional functions. Over 250 HC and HCT device types are available, including gates, latches, flip-flops, buffers/drivers, counters, multiplexers, transceivers, and registered transceivers. The HC/HCT family is a popular, reliable logic family, with 6-mA output current drive at 5-V V_{CC} (HC/HCT) and 20- μ A output current drive 3.3-V V_{CC} (HC only).

While HCMOS can be used in most new designs, TI recommends Advanced High-Speed CMOS (AHC) as a reliable and effortless migration path from the HC family. AHC delivers the same low noise as HC, with one-half the static power consumption of HC, at a competitive price.

The HC family offers CMOS inputs and outputs, while the HCT family offers TTL inputs with CMOS outputs.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

HC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HC00	14	Quad 2-Input NAND Gates	✓	✓	✓					SCHS116
SN74HC00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		✓		SCLS181
CD74HC02	14	Quad 2-Input NOR Gates	✓	✓	✓					SCHS125
SN74HC02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓	✓	✓		SCLS076
CD74HC03	14	Quad 2-Input NAND Gates with Open-Drain Outputs	✓	✓	✓					SCHS126
SN74HC03	14	Quad 2-Input NAND Gates with Open-Drain Outputs	✓	✓	✓	✓				SCLS077
CD74HC04	14	Hex Inverters	✓	✓	✓					SCHS117
SN74HC04	14	Hex Inverters	✓	✓	✓	✓		✓		SCLS078
CD74HCU04	14	Hex Unbuffered Inverters	✓	✓	✓					SCHS127
SN74HCU04	14	Hex Unbuffered Inverters	✓	✓	✓	✓	✓	✓		SCLS079
SN74HC05	14	Hex Inverters with Open-Drain Outputs	✓	✓	✓	✓	✓			SCLS080
CD74HC08	14	Quad 2-Input AND Gates	✓	✓	✓					SCHS118
SN74HC08	14	Quad 2-Input AND Gates	✓	✓	✓	✓		✓		SCLS081
CD74HC10	14	Triple 3-Input NAND Gates	✓	✓	✓					SCHS128
SN74HC10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓		✓		SCLS083
CD74HC11	14	Triple 3-Input AND Gates	✓	✓	✓					SCHS273
SN74HC11	14	Triple 3-Input AND Gates	✓	✓	✓	✓		✓		SCLS084
CD74HC14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓					SCHS129
SN74HC14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	✓		✓		SCLS085
CD74HC20	14	Dual 4-Input NAND Gates	✓	✓	✓					SCHS130
SN74HC20	14	Dual 4-Input NAND Gates	✓	✓	✓		✓	✓		SCLS086
CD74HC21	14	Dual 4-Input AND Gates	✓	✓	✓	✓				SCHS131
SN74HC21	14	Dual 4-Input AND Gates	✓	✓	✓			✓		SCLS087
CD74HC27	14	Triple 3-Input NOR Gates	✓	✓	✓	✓				SCHS132
SN74HC27	14	Triple 3-Input NOR Gates	✓	✓	✓	✓				SCLS088
CD74HC30	14	8-Input NAND Gates	✓	✓	✓	✓		✓		SCHS121
CD74HC32	14	Quad 2-Input OR Gates	✓	✓	✓					SCHS274
SN74HC32	14	Quad 2-Input OR Gates	✓	✓	✓	✓	✓	✓		SCLS200
CD74HC42	16	4-Line BCD to 10-Line Decimal Decoders	✓	✓	✓					SCHS133
SN74HC42	16	4-Line BCD to 10-Line Decimal Decoders	✓	✓	✓	✓				SCLS091
CD74HC73	14	Dual J-K Edge-Triggered Flip-Flops with Reset	✓	✓	✓					SCHS134
CD74HC74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓					SCHS124

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
SN74HC74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓	✓	✓		SCLS094
CD74HC75	16	Dual 2-Bit Bistable Transparent Latches	✓	✓	✓	✓		✓		SCHS135
CD74HC85	16	4-Bit Magnitude Comparators	✓	✓	✓	✓		✓		SCHS136
CD74HC86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓					SCHS137
SN74HC86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓		✓		SCLS100
CD74HC93	14	4-Bit Binary Ripple Counters		✓	✓					SCHS138
CD74HC107	14	Dual Negative-Edge-Triggered J-K Flip-Flops with Reset	✓	✓	✓					SCHS139
CD74HC109	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓					SCHS140
SN74HC109	16	Dual Positive-Edge-Triggered J-K Flip Flops with Set and Reset	✓	✓	✓					SCLS098
CD74HC112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓		✓		SCHS141
SN74HC112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓				SCLS099
CD74HC123	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓	✓	✓		✓		SCHS142
CD74HC125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓					SCHS143
SN74HC125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓			SCLS104
CD74HC126	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓					SCHS144
SN74HC126	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS103
CD74HC132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓	✓					SCHS145
SN74HC132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓	✓		✓	✓		SCLS034
CD74HC137	16	3-to-8 Line Decoders/Demultiplexers with Address Latches		✓		✓		✓		SCHS146
CD74HC138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓					SCHS147
SN74HC138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓	✓	✓		SCLS107
CD74HC139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓					SCHS148
SN74HC139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓	✓	✓	✓		SCLS108
CD74HC147	16	10-to-4 Line Priority Encoders	✓	✓	✓	✓		✓		SCHS149
SN74HC148	16	8-to-3 Line Priority Encoders	✓	✓	✓	✓				SCLS109
CD74HC151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓					SCHS150
SN74HC151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓	✓		✓		SCLS110
CD74HC153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓					SCHS151
SN74HC153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓	✓		✓		SCLS112
CD74HC154	24	4-to-16 Line Decoders/Demultiplexers	✓	✓	✓					SCHS152
CD74HC157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓					SCHS153
SN74HC157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		✓		SCLS113
SN74HC158	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		✓		SCLS296
CD74HC161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓					SCHS154
SN74HC161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		✓		SCLS297
CD74HC163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓					SCHS154
SN74HC163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		✓		SCLS298
CD74HC164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓			✓		SCHS155
SN74HC164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓	✓		✓		SCLS115
CD74HC165	16	8-Bit Parallel-In, Serial-Out Shift Registers	✓	✓	✓					SCHS156
SN74HC165	16	8-Bit Parallel-In, Serial-Out Shift Registers	✓	✓	✓	✓	✓	✓		SCLS116
CD74HC166	16	8-Bit Parallel-Load Shift Registers	✓	✓	✓			✓		SCHS157
SN74HC166	16	8-Bit Parallel-Load Shift Registers	✓	✓	✓	✓				SCLS117
CD74HC173	16	Quad D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		✓		SCHS158

DEVICE SELECTION GUIDE

HC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HC174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓					SCHS159
SN74HC174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓	✓		✓		SCLS119
CD74HC175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓					SCHS160
SN74HC175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓	✓		✓		SCLS299
CD74HC190	16	Presetable Synchronous 4-Bit Up/Down BCD Decade Counters	✓	✓		✓		✓		SCHS275
CD74HC191	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓					SCHS162
SN74HC191	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓				SCLS121
CD74HC192	16	BCD Presetable Synchronous 4-Bit Up/Down Decade Counters	✓	✓		✓		✓		SCHS163
CD74HC193	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓					SCHS163
SN74HC193	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		✓		SCLS122
CD74HC194	16	4-Bit Bidirectional Universal Shift Registers	✓	✓	✓	✓		✓		SCHS164
CD74HC195	16	4-Bit Parallel Access Shift Registers	✓	✓	✓	✓		✓		SCHS165
CD74HC221	16	Dual Monostable Multivibrators with Schmitt-Trigger Inputs	✓	✓	✓	✓		✓		SCHS166
CD74HC237	16	3-to-8 Line Decoders/Demultiplexers with Address Latches	✓	✓	✓	✓		✓		SCHS146
CD74HC238	16	3-to-8 Line Decoders/Demultiplexers	✓	✓	✓	✓		✓		SCHS147
CD74HC240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓					SCHS167
SN74HC240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS128
SN74HC240A	20	Octal Buffers/Drivers with 3-State Outputs		✓				✓		Call
CD74HC241	20	Octal Buffers/Drivers with 3-State Outputs		✓	✓					SCHS167
SN74HC241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS300
CD74HC243	14	Quad Bus-Transceivers with 3-State Outputs	✓	✓	✓					SCHS168
CD74HC244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓					SCHS167
SN74HC244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS130
CD74HC245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS119
SN74HC245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS131
CD74HC251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓					SCHS169
SN74HC251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS132
CD74HC253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs		✓	✓					SCHS170
SN74HC253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓	✓			SCLS133
CD74HC257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓					SCHS171
SN74HC257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS224
CD74HC258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs			✓					SCHS276
SN74HC258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓	✓		✓		SCLS224
CD74HC259	16	8-Bit Addressable Latches	✓	✓	✓					SCHS173
SN74HC259	16	8-Bit Addressable Latches	✓	✓	✓	✓		✓		SCLS134
SN74HC266	14	Quad 2-Input Exclusive-NOR Gates with Open-Drain Outputs		✓	✓	✓				SCLS135
CD74HC273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓					SCHS174
SN74HC273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓	✓	✓	✓		SCLS136
CD74HC280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓	✓					SCHS175
CD74HC283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓					SCHS176
CD74HC297	16	Digital Phase-Locked Loops	✓	✓						SCHS177
CD74HC299	20	8-Bit Universal Shift/Storage Registers	✓	✓	✓					SCHS178
CD74HC354	20	8-Line to 1-Line Data Selectors/Multiplexers/Registers	✓	✓						SCHS179
CD74HC365	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓			✓		SCHS180

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
SN74HC365	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓				SCLS308
CD74HC366	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs	✓	✓	✓					SCHS180
CD74HC367	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓					SCHS181
SN74HC367	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS309
CD74HC368	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs	✓	✓	✓					SCHS181
SN74HC368	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS310
CD74HC373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓					SCHS182
SN74HC373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS140
CD74HC374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS183
SN74HC374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS141
CD74HC377	20	Octal D-Type Flip-Flops with Enable	✓	✓	✓					SCHS184
SN74HC377	20	Octal D-Type Flip-Flops with Enable	✓	✓	✓	✓				SCLS307
CD74HC390	16	Dual 4-Bit Decade Counters		✓	✓					SCHS185
CD74HC393	14	Dual 4-Bit Binary Counters	✓	✓	✓					SCHS186
SN74HC393	14	Dual 4-Bit Binary Counters	✓	✓	✓	✓	✓	✓		SCLS143
CD74HC423	16	Dual Retriggerable Monostable Multivibrators with Reset		✓	✓	✓				SCHS142
CD74HC533	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓						SCHS187
CD74HC534	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓						SCHS188
CD74HC540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓			✓		SCHS189
SN74HC540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓				SCLS007
CD74HC541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓					SCHS189
SN74HC541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS305
CD74HC563	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓	✓					SCHS187
SN74HC563	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓					SCLS145
CD74HC564	20	Octal D-Type Inverting Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS188
CD74HC573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓					SCHS182
SN74HC573A	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓		✓	✓		SCLS147
CD74HC574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS183
SN74HC574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		✓		SCLS148
SN74HC590A	16	8-Bit Binary Counters with 3-State Output Registers	✓	✓	✓					SCLS039
SN74HC594	16	8-Bit Shift Registers with Output Registers		✓	✓					SCLS040
SN74HC595	16	8-Bit Shift Registers with 3-State Output Registers	✓	✓	✓	✓				SCLS041
CD74HC597	16	8-Bit Shift Registers with Input Latches	✓	✓	✓	✓				SCHS191
SN74HC623	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓				SCLS149
CD74HC640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS192
SN74HC640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS303
SN74HC645	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓				SCLS304
CD74HC646	24	Octal Registered Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS193
SN74HC646	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓					SCLS150
CD74HC652	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓						SCHS194
SN74HC652	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓	✓					SCLS151
CD74HC670	16	4-by-4 Register Files with 3-State Outputs	✓	✓	✓					SCHS195
SN74HC682	20	8-Bit Magnitude Comparators		✓	✓					SCLS018
SN74HC684	20	8-Bit Magnitude Comparators		✓	✓					SCLS340

DEVICE SELECTION GUIDE

HC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HC688	20	8-Bit Magnitude Comparators	✓	✓	✓	✓		✓		SCHS196
SN74HC688	20	8-Bit Magnitude Comparators	✓	✓	✓			✓		SCLS010
CD74HC4002	14	Dual 4-Input NOR Gates	✓	✓	✓	✓		✓		SCHS197
CD74HC4015	16	Dual 4-Stage Static Shift Registers	✓	✓	✓					SCHS198
CD74HC4016	14	Quad Bilateral Switches		✓	✓					SCHS199
CD74HC4017	16	Decade Counters/Dividers with 1-of-10 Decoded Outputs	✓	✓	✓	✓		✓		SCHS200
CD74HC4020	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓					SCHS201
SN74HC4020	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓		✓		SCLS158
CD74HC4024	14	7-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓			✓		SCHS202
CD74HC4040	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓				SCHS203
SN74HC4040	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓	✓	✓		SCLS160
CD74HC4046A	16	Micropower Phase-Locked Loops with VCO	✓	✓	✓	✓		✓		SCHS204
CD74HC4049	16	Hex Buffers/Converters	✓	✓	✓	✓		✓		SCHS205
CD74HC4050	16	Hex Buffers/Converters	✓	✓	✓	✓		✓		SCHS205
CD74HC4051	16	8-Channel Analog Multiplexers/Demultiplexers with Logic-Level Conversion	✓	✓	✓	✓		✓		SCHS122
CD74HC4052	16	Dual 4-Channel Analog Multiplexers/Demultiplexers with Logic-Level Conversion	✓	✓	✓	✓				SCHS122
CD74HC4053	16	Triple 2-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion	✓	✓	✓	✓		✓		SCHS122
CD74HC4059	24	Programmable Divide-by-N Counters	✓	✓	✓					SCHS206
CD74HC4060	16	14-Stage Binary-Ripple Counters/Dividers and Oscillators	✓	✓	✓			✓		SCHS207
SN74HC4060	16	14-Stage Binary-Ripple Counters/Dividers and Oscillators		✓	✓	✓		✓		SCLS161
CD74HC4066	14	Quad Bilateral Switches	✓	✓	✓					SCHS208
SN74HC4066	14	Quad Bilateral Switches		✓	✓	✓	✓	✓		SCLS325
CD74HC4067	24	Single 16-Channel Analog Multiplexers/Demultiplexers	✓	✓	✓		✓			SCHS209
CD74HC4075	14	Triple 3-Input OR Gates	✓	✓	✓	✓		✓		SCHS210
CD74HC4094	16	8-Stage Shift-and-Store Bus Registers	✓	✓	✓	✓		✓		SCHS211
CD74HC4316	16	Quad Analog Switches with Level Translation	✓	✓	✓	✓		✓		SCHS212
CD74HC4351	20	Analog 1-of-8 Multiplexers/Demultiplexers with Latch	✓	✓	✓					SCHS213
CD74HC4352	20	Analog Dual 1-of-4 Multiplexers/Demultiplexers with Latch	✓	✓						SCHS213
CD74HC4511	16	BCD to 7-Segment Latch Decoder Drivers	✓	✓	✓			✓		SCHS214
CD74HC4514	24	4-Bit Latches/4-to-16 Line Decoders	✓	✓	✓					SCHS215
CD74HC4515	24	4-Bit Latches/4-to-16 Line Decoders	✓	✓	✓					SCHS215
CD74HC4518	16	Dual BCD Up Counters		✓						SCHS216
CD74HC4520	16	Dual Binary Up Counters	✓	✓	✓					SCHS216
CD74HC4538	16	Dual Retriggerable Precision Monostable Multivibrators	✓	✓	✓	✓		✓		SCHS123
CD74HC4543	16	BCD to 7-Segment Latches/Decoders/Drivers for Liquid-Crystal Displays		✓						SCHS217
SN74HC4851	16	8-Channel Analog Multiplexers/Demultiplexers with Injection-Current Effect Control		✓	✓			✓	✓	SCLS542
SN74HC4852	16	Dual 4-to-1 Channel Analog Multiplexers/Demultiplexers with Injection-Current Effect Control		✓	✓			✓	✓	SCLS573
SN74HC7001	14	Quad 2-Input AND Gates with Schmitt-Trigger Inputs		✓	✓	✓				SCLS035
SN74HC7002	14	Quad 2-Input NOR Gates with Schmitt-Trigger Inputs		✓	✓	✓		✓		SCLS033

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
SN74HC7032	14	Quad 2-Input OR Gates with Schmitt-Trigger Inputs		✓	✓	✓				SCLS036
CD74HC7046A	16	Phase-Locked Loops with VCO and Lock Detector		✓	✓					SCHS218
CD74HC7266	14	Quad 2-Input Exclusive NOR Gates	✓	✓	✓					SCHS219
CD74HC40103	16	8-Bit Binary Presettable Synchronous Down Counters	✓	✓	✓					SCHS221

DEVICE SELECTION GUIDE

HCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HCT00	14	Quad 2-Input NAND Gates	✓	✓	✓					SCHS116
SN74HCT00	14	Quad 2-Input NAND Gates		✓	✓	✓		✓		SCLS062
CD74HCT02	14	Quad 2-Input NOR Gates	✓	✓	✓					SCHS125
SN74HCT02	14	Quad 2-Input NOR Gates		✓	✓	✓		✓		SCLS065
CD74HCT03	14	Quad 2-Input NAND Gates with Open-Drain Outputs	✓	✓	✓					SCHS126
CD74HCT04	14	Hex Inverters	✓	✓	✓					SCHS117
SN74HCT04	14	Hex Inverters	✓	✓	✓	✓		✓		SCLS042
CD74HCT08	14	Quad 2-Input AND Gates	✓	✓	✓					SCHS118
SN74HCT08	14	Quad 2-Input AND Gates		✓	✓	✓	✓	✓		SCLS063
CD74HCT10	14	Triple 3-Input NAND Gates	✓	✓	✓					SCHS128
CD74HCT11	14	Triple 3-Input AND Gates	✓	✓	✓					SCHS273
CD74HCT14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓					SCHS129
SN74HCT14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓		✓	✓	✓	SCLS225
CD74HCT20	14	Dual 4-Input NAND Gates	✓	✓	✓					SCHS130
CD74HCT21	14	Dual 4-Input AND Gates		✓	✓					SCHS131
CD74HCT27	14	Triple 3-Input NOR Gates	✓	✓	✓					SCHS132
CD74HCT30	14	8-Input NAND Gates	✓	✓	✓					SCHS121
CD74HCT32	14	Quad 2-Input OR Gates	✓	✓	✓					SCHS274
SN74HCT32	14	Quad 2-Input OR Gates		✓	✓		✓	✓		SCLS064
CD74HCT42	16	4-Line BCD to 10-Line Decimal Decoders	✓	✓						SCHS133
CD74HCT73	14	Dual J-K Edge-Triggered Flip-Flops with Reset		✓	✓					SCHS134
CD74HCT74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓					SCHS124
SN74HCT74	14	Dual D-Type Flip-Flops with Set and Reset		✓	✓	✓	✓	✓		SCLS169
SN74HCT74A	14	Dual D-Type Flip-Flops with Set and Reset		✓			✓	✓		Call
CD74HCT75	16	Dual 2-Bit Bistable Transparent Latches	✓	✓	✓					SCHS135
CD74HCT85	16	4-Bit Magnitude Comparators	✓	✓	✓					SCHS136
CD74HCT86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓					SCHS137
CD74HCT93	14	4-Bit Binary Ripple Counters		✓						SCHS138
CD74HCT107	14	Dual Negative-Edge-Triggered J-K Flip-Flops with Reset		✓						SCHS139
CD74HCT109	16	Dual Positive-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓					SCHS140
CD74HCT112	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓						SCHS141
CD74HCT123	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓	✓					SCHS142

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HCT125	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓					SCHS143
SN74HCT125	14	Quad Bus Buffers with 3-State Outputs		✓	✓					SCLS069
CD74HCT126	14	Quad Bus Buffers with 3-State Outputs		✓	✓					SCHS144
CD74HCT132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓	✓					SCHS145
CD74HCT137	16	3-to-8 Line Decoders/Demultiplexers with Address Latches		✓	✓					SCHS146
CD74HCT138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓					SCHS147
SN74HCT138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓		✓		SCLS171
CD74HCT139	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓					SCHS148
SN74HCT139	16	Dual 2-to-4 Line Decoders/Demultiplexers		✓	✓		✓	✓		SCLS066
CD74HCT147	16	10-to-4 Line Priority Encoders		✓						SCHS149
CD74HCT151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓					SCHS150
CD74HCT153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓					SCHS151
CD74HCT154	24	4-to-16 Line Decoders/Demultiplexers	✓	✓	✓					SCHS152
CD74HCT157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓					SCHS153
SN74HCT157	16	Quad 2-to-4 Line Data Selectors/Multiplexers		✓	✓					SCLS071
CD74HCT158	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓						SCHS153
CD74HCT161	16	Synchronous 4-Bit Binary Counters	✓	✓	✓					SCHS154
CD74HCT163	16	Synchronous 4-Bit Binary Counters	✓	✓	✓					SCHS154
CD74HCT164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓					SCHS155
CD74HCT165	16	8-Bit Parallel-In, Serial-Out Shift Registers	✓	✓	✓					SCHS156
CD74HCT166	16	8-Bit Parallel-Load Shift Registers	✓	✓	✓					SCHS157
CD74HCT173	16	Quad D-Type Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS158
CD74HCT174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓					SCHS159
CD74HCT175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓					SCHS160
CD74HCT191	16	Presettable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓					SCHS162
CD74HCT193	16	Presettable Synchronous 4-Bit Up/Down Binary Counters	✓	✓						SCHS163
CD74HCT194	16	4-Bit Bidirectional Universal Shift Registers		✓						SCHS164
CD74HCT221	16	Dual Monostable Multivibrators with Schmitt-Trigger Inputs		✓	✓					SCHS166
CD74HCT237	16	3-to-8 Line Decoders/Demultiplexers with Address Latches		✓						SCHS146
CD74HCT238	16	3-to-8 Line Decoders/Demultiplexers	✓	✓	✓					SCHS147
CD74HCT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓					SCHS167
SN74HCT240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		✓		SCLS174
CD74HCT241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓					SCHS167
CD74HCT243	14	Quad Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS168
CD74HCT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓					SCHS167
SN74HCT244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS175
CD74HCT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS119
SN74HCT245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS020
CD74HCT251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓					SCHS169
CD74HCT253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs		✓	✓					SCHS170
CD74HCT257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓					SCHS171
SN74HCT257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs		✓	✓					SCLS072
CD74HCT258	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓						SCHS172
CD74HCT259	16	8-Bit Addressable Latches	✓	✓	✓					SCHS173

DEVICE SELECTION GUIDE

HCT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HCT273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓					SCHS174
SN74HCT273	20	Octal D-Type Flip-Flops with Clear		✓	✓	✓	✓	✓		SCLS068
CD74HCT280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓						SCHS175
CD74HCT283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓					SCHS176
CD74HCT297	16	Digital Phase-Locked Loops		✓						SCHS177
CD74HCT299	20	8-Bit Universal Shift/Storage Registers	✓	✓	✓					SCHS178
CD74HCT354	20	8-Line to 1-Line Data Selectors/Multiplexers/Registers		✓						SCHS179
CD74HCT356	20	8-Line to 1-Line Data Selectors/Multiplexers/Registers		✓	✓					SCHS277
CD74HCT365	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓					SCHS180
CD74HCT367	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓					SCHS181
CD74HCT368	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs		✓	✓					SCHS181
CD74HCT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓					SCHS182
SN74HCT373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓		✓		SCLS009
CD74HCT374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS183
SN74HCT374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS005
CD74HCT377	20	Octal D-Type Flip-Flops with Enable	✓	✓	✓					SCHS184
SN74HCT377	20	Octal D-Type Flip-Flops with Enable		✓	✓					SCLS067
CD74HCT390	16	Dual 4-Bit Decade Counters	✓	✓	✓					SCHS185
CD74HCT393	14	Dual 4-Bit Binary Counters	✓	✓	✓					SCHS186
CD74HCT423	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓	✓					SCHS142
CD74HCT533	20	Octal Inverting Transparent Latches with 3-State Outputs	✓	✓						SCHS187
CD74HCT534	20	Octal Inverting D-Type Flip-Flops with 3-State Outputs	✓	✓						SCHS188
CD74HCT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓					SCHS189
SN74HCT540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs		✓	✓					SCLS008
CD74HCT541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓					SCHS189
SN74HCT541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	✓		SCLS306
CD74HCT563	20	Octal Inverting Transparent Latches with 3-State Outputs		✓	✓					SCHS187
CD74HCT564	20	Octal Inverting D-Type Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS188
CD74HCT573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓					SCHS182
SN74HCT573	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓			SCLS176
CD74HCT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓	✓	✓					SCHS183
SN74HCT574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓		✓		SCLS177
CD74HCT597	16	8-Bit Shift Registers with Input Latches		✓	✓					SCHS191
SN74HCT623	20	Octal Bus Transceivers with 3-State Outputs		✓	✓					SCLS016
CD74HCT640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓					SCHS192
SN74HCT645	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		✓		SCLS019
CD74HCT646	24	Octal Registered Bus Transceivers with 3-State Outputs			✓					SCHS278
SN74HCT646	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓					SCLS178
CD74HCT652	24	Octal Bus Transceivers and Registers with 3-State Outputs			✓					SCHS194
SN74HCT652	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓	✓					SCLS179
CD74HCT670	16	4-by-4 Register Files with 3-State Outputs		✓	✓					SCHS195
CD74HCT688	20	8-Bit Magnitude Comparators	✓	✓	✓					SCHS196
CD74HCT4020	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓					SCHS201
CD74HCT4024	14	7-Stage Ripple-Carry Binary Counters/Dividers	✓		✓					SCHS202

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	TVSOP	
CD74HCT4040	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓					SCHS203
CD74HCT4046A	16	Micropower Phase-Locked Loops with VCO	✓	✓	✓					SCHS204
CD74HCT4051	16	8-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion	✓	✓	✓					SCHS122
CD74HCT4052	16	Dual 4-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion		✓	✓					SCHS122
CD74HCT4053	16	Triple 2-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion		✓	✓			✓		SCHS122
CD74HCT4060	16	14-Stage Binary-Ripple Counters/Dividers and Oscillators	✓	✓	✓					SCHS207
CD74HCT4066	14	Quad Bilateral Switches		✓	✓					SCHS208
CD74HCT4067	24	Single 16-Channel Analog Multiplexers/Demultiplexers			✓					SCHS209
CD74HCT4075	14	Triple 3-Input OR Gates	✓	✓						SCHS210
CD74HCT4094	16	8-Stage Shift-and-Store Bus Registers		✓	✓					SCHS211
CD74HCT4316	16	Quad Analog Switches with Level Translation		✓	✓					SCHS212
CD74HCT4351	20	Analog 1-of-8 Multiplexers/Demultiplexers with Latch		✓						SCHS213
CD74HCT4511	16	BCD to 7-Segment Latch Decoder Drivers		✓						SCHS279
CD74HCT4514	24	4-Bit Latches/4-to-16 Line Decoders		✓						SCHS314
CD74HCT4515	24	4-Bit Latches/4-to-16 Line Decoders		✓						SCHS314
CD74HCT4520	16	Dual Binary Up Counters		✓	✓					SCHS216
CD74HCT4538	16	Dual Retriggerable Precision Monostable Multivibrators	✓	✓	✓					SCHS123
CD74HCT4543	16	BCD to 7-Segment Latches/Decoders/Drivers for Liquid-Crystal Displays		✓						SCHS281
CD74HCT7046A	16	Phase-Locked Loops with VCO and Lock Detector		✓	✓					SCHS218
CD74HCT40103	16	8-Bit Binary Presettable Synchronous Down Counters		✓	✓					SCHS221


IEEE Std 1149.1 (JTAG) Boundary-Scan Logic

The IEEE Std 1149.1 (JTAG) boundary-scan logic family of octal, Widebus™, and scan-support functions incorporates circuitry that allows these devices and the electronic systems in which they are used to be tested without reliance on traditional probing techniques.

Bus-interface logic devices are available in BCT, ABT, and LVT technologies in the 8-, 18-, and 20-bit options of standard buffers, latches, and transceivers. The UBT™ devices, which can functionally replace 50+ standard bus-interface devices, are featured at Widebus widths (18 bits and 20 bits). Package options for these devices include plastic dual in-line package (PDIP), small-outline integrated circuit (SOIC), shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin quad flatpack (TQFP). The scan-support functions include devices for controlling the test bus, performing at-speed functional testing, and partitioning the scan path into smaller, more manageable segments.

Over 40 devices, composed of a wide selection of BCT and ABT octals, ABT and LVT Widebus, and scan-support functions, are available. Bus-hold and series-damping-resistor features also are available.

See www.ti.com/sc/jtag for the most current data sheets.

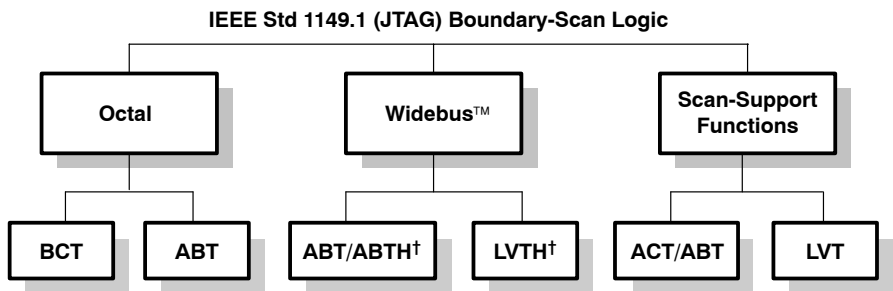

† "H" indicates bus hold

TI IEEE Std 1149.1-Compliant Device Family and Function Cross-Reference

Octal Bus-Interface Logic With JTAG Test Access Port (TAP)

FUNCTION	PACKAGE	PINS	BITS	ABT	BH	R	BCT	BH	R
240	DW/NT	24	8				SN74BCT8240A	N	N
244	DW/NT	24	8				SN74BCT8244A	N	N
245	DW	24	8	SN74ABT8245	N	N	SN74BCT8245A	N	N
	NT	24	8				SN74BCT8245A	N	N
373	DW/NT	24	8				SN74BCT8373A	N	N
374	DW/NT	24	8				SN74BCT8374A	N	N
543	DL/DW	28	8	SN74ABT8543	N	N			
646	DL/DW	28	8	SN74ABT8646	N	N			
652	DL/DW	28	8	SN74ABT8652	N	N			
952	DL/DW	28	8	SN74ABT8952	N	N			

TQFP Bus-Interface Logic With JTAG TAP

FUNCTION	PACKAGE	PINS	BITS	ABT	BH	R	LVT	BH	R
16646	PM	64	2 × 9	SN74ABTH18646	Y	Y	SN74LVTH18646A	Y	Y
16652	PM	64	2 × 9	SN74ABTH18652	Y	Y	SN74LVTH18652A	Y	Y
16501	PM	64	2 × 9	SN74ABTH18502	Y	Y	SN74LVTH18502A	Y	Y
16601	PM	64	20	SN74ABTH18504	Y	Y	SN74LVTH18504A	Y	Y

Widebus™ Bus-Interface Logic With JTAG TAP

FUNCTION	PACKAGE	PINS	BITS	ABT	BH	R	LVT	BH	R
16245	DGG/DL	56	2 × 9	SN74ABT18245A	N	N			
16640	DGG/DL	56	2 × 9	SN74ABT18640	N	N			
16501	DGG	64	2 × 9				SN74LVTH18512	B	Y
16601	DGG	64	20				SN74LVTH18514	Y	P

JTAG Scan-Support Products

FUNCTION	PACKAGE	PINS	ABT	BH	R	ACT	BH	R	LVT	BH	R
8980A	DW	24	Embedded Test Bus Controller						SN74LVT8980/A	N	N
8986	PM	64				10-Bit Linking Addressable Scan Ports			SN74LVT8986	N	N
8990A	FN	44				SN74ACT8990	N	N	Test Bus Controller		
8996	DW/PW	24	SN74ABT8996	N	N	10-Bit Addressable Scan Ports			SN74LVT8996	N	N
8997	DW	28				SN74ACT8997	N	N	Scan Path Linker		

B = both non-bus-hold and bus-hold version

BH = bus hold

N = no

P = preview

R = series-damping-resistor option

Y = yes

IEEE STD 1149.1 (JTAG) BOUNDARY-SCAN LOGIC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	PLCC	SOIC	SSOP	TQFP	TSSOP	
SN74BCT8240A	24	Scan Test Devices with Octal Buffers	✓	✓		✓				SCBS067
SN74BCT8244A	24	Scan Test Devices with Octal Buffers	✓	✓		✓				SCBS042
SN74ABT8245	24	Scan Test Devices with Octal Transceivers	✓			✓				SCBS124
SN74BCT8245A	24	Scan Test Devices with Octal Transceivers	✓	✓		✓				SCBS043
SN74BCT8373A	24	Scan Test Devices with Octal D-Type Latches	✓	✓		✓				SCBS044
SN74BCT8374A	24	Scan Test Devices with Octal Edge-Triggered D-Type Flip-Flops	✓	✓		✓				SCBS045
SN74ABT8543	28	Scan Test Devices with Octal Registered Bus Transceivers	✓			✓	✓			SCBS120
SN74ABT8646	28	Scan Test Devices with Octal Bus Transceivers and Registers	✓			✓	✓			SCBS123
SN74ABT8652	28	Scan Test Devices with Octal Bus Transceivers and Registers	✓			✓	✓			SCBS122
SN74ABT8952	28	Scan Test Devices with Octal Registered Bus Transceivers				✓	✓			SCBS121
SN74LVT8980A	24	Scan Test Bus Controllers with 8-Bit Generic Host Interfaces	✓			✓				SCBS755
SN74LVT8986	64	10-Bit Linking Addressable Scan Ports Multidrop-Addressable IEEE Std 1149.1 (JTAG) TAP Transceivers	✓					✓		SCBS759
SN74ACT8990	44	Test Bus Controllers IEEE Std 1149.1 (JTAG) TAP Masters with 16-Bit Generic Host Interfaces	✓		✓					SCBS190
SN74ABT8996	24	10-Bit Addressable Scan Ports Multidrop-Addressable IEEE Std 1149.1 (JTAG) TAP Transceivers	✓			✓			✓	SCBS489
SN74LVT8996	24	10-Bit Addressable Scan Ports Multidrop-Addressable IEEE Std 1149.1 (JTAG) TAP Transceivers				✓			✓	SCBS686
SN74ACT8997	28	Scan Path Linkers with 4-Bit Identification Buses Scan-Controlled IEEE Std 1149.1 (JTAG) TAP Concatenators	✓			✓				SCBS157
SN74ABT18245A	56	Scan Test Devices with 18-Bit Bus Transceivers	✓				✓		✓	SCBS110
SN74ABT18502	64	Scan Test Devices with 18-Bit Universal Bus Transceivers	✓					✓		SCBS109
SN74ABTH18502A	64	Scan Test Devices with 18-Bit Universal Bus Transceivers	✓					✓		SCBS164
SN74LVTH18502A	64	Scan Test Devices with 18-Bit Universal Bus Transceivers	✓					✓		SCBS668
SN74ABT18504	64	Scan Test Devices with 20-Bit Universal Bus Transceivers	✓					✓		SCBS108
SN74ABTH18504A	64	Scan Test Devices with 20-Bit Universal Bus Transceivers						✓		SCBS165
SN74LVTH18504A	64	Scan Test Devices with 20-Bit Universal Bus Transceivers						✓		SCBS667
SN74LVTH18511	64	Scan Test Devices with 18-Bit Universal Bus Transceivers							✓	SCAS694
SN74LVT18512	64	Scan Test Devices with 18-Bit Universal Bus Transceivers							✓	SCBS711
SN74LVTH18512	64	Scan Test Devices with 18-Bit Universal Bus Transceivers							✓	SCBS671
SN74LVTH18514	64	Scan Test Devices with 20-Bit Universal Bus Transceivers							✓	SCBS670
SN74ABT18640	56	Scan Test Devices with 18-Bit Inverting Bus Transceivers					✓		✓	SCBS267

commercial package description and availability
DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✦ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

[†] JEDEC reference for wafer chip scale package (WCSP)

DEVICE SELECTION GUIDE

IEEE STD 1149.1 (JTAG) BOUNDARY-SCAN LOGIC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE
			MIL	PDIP	PLCC	SOIC	SSOP	TQFP	TSSOP	
SN74ABT18646	64	Scan Test Devices with 18-Bit Transceivers and Registers	✓					✓		SCBS131
SN74ABTH18646A	64	Scan Test Devices with 18-Bit Transceivers and Registers	✓					✓		SCBS166
SN74LVTH18646A	64	Scan Test Devices with 18-Bit Transceivers and Registers	✓					✓		SCBS311
SN74ABT18652	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS132
SN74ABTH18652A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS167
SN74LVTH18652A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS312
SN74ABTH182502A	64	Scan Test Devices with 18-Bit Universal Bus Transceivers						✓		SCBS164
SN74LVTH182502A	64	Scan Test Devices with 18-Bit Universal Bus Transceivers						✓		SCBS668
SN74ABTH182504A	64	Scan Test Devices with 20-Bit Universal Bus Transceivers						✓		SCBS165
SN74LVTH182504A	64	Scan Test Devices with 20-Bit Universal Bus Transceivers						✓		SCBS667
SN74LVTH182512	64	Scan Test Devices with 18-Bit Universal Bus Transceivers							✓	SCBS671
SN74ABTH182646A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS166
SN74LVTH182646A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS311
SN74ABTH182652A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS167
SN74LVTH182652A	64	Scan Test Devices with 18-Bit Transceivers and Registers						✓		SCBS312

Little Logic

TI maintains one of the largest Little Logic portfolios in the logic industry, with a wide array of functions, families, and packaging options. With power and space concerns being prevalent in the emerging portable space, Little Logic offers the right technologies to meet these needs with NanoStar™/NanoFree™ packaging, the industry's smallest packages, and AUC, the first logic family optimized at 1.8 V.

Little Logic products are offered in the following technology families:

- AUC (advanced ultra-low-voltage CMOS logic) with 0.8-V to 2.7-V V_{CC} operation and I_{off} circuitry
- LVC (low-voltage CMOS logic) with 1.65-V to 5.5-V V_{CC} operation and I_{off} circuitry
- AHC/AHCT (advanced high-speed CMOS logic) with 2-V to 5.5-V operation in CMOS- and TTL-compatible versions
- CBT/CBTD (crossbar technology logic) with 4.5-V to 5.5-V operation, output voltage translation, and integrated level-shifting diode
- CBTLV (low-voltage crossbar technology logic) with 2.3-V to 3.6-V operation and I_{off} circuitry

Single/dual gates are available in 5-/6-pin SOT 23 and SC-70 packages, while triple gates are offered in 8-pin SM-8 and US-8 packages. TI Little Logic is also available in the world's smallest logic packages, NanoStar™ and NanoFree™ package technology.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

LITTLE LOGIC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			DSBGA	SOT	SSOP	VSSOP	
SN74AHC1G00	5	Single 2-Input NAND Gates		✓			SCLS313
SN74AHCT1G00	5	Single 2-Input NAND Gates		✓			SCLS316
SN74AUC1G00	5	Single 2-Input NAND Gates	✓	✓			SCES368
SN74AUP1G00	5	Single 2-Input NAND Gates	✓	✓			SCES604
SN74LVC1G00	5	Single 2-Input NAND Gates	✓	✓			SCES212
SN74AUC2G00	8	Dual 2-Input NAND Gates	✓	✓			SCES440
SN74LVC2G00	8	Dual 2-Input NAND Gates	✓		✓	✓	SCES193
SN74AHC1G02	5	Single 2-Input NOR Gates		✓			SCLS342
SN74AHCT1G02	5	Single 2-Input NOR Gates		✓			SCLS341
SN74AUC1G02	5	Single 2-Input NOR Gates	✓	✓			SCES369
SN74AUP1G02	5	Low-Power Single 2-Input NOR Gates		✓			SCES568
SN74LVC1G02	5	Single 2-Input NOR Gates	✓	✓			SCES213
SN74AUC2G02	8	Dual 2-Input NOR Gates	✓	✓		✓	SCES441
SN74LVC2G02	8	Dual 2-Input NOR Gates	✓		✓	✓	SCES194
SN74AHC1G04	5	Single Inverters		✓			SCLS318
SN74AHC1GU04	5	Single Inverters		✓			SCLS343
SN74AHCT1G04	5	Single Inverters		✓			SCLS319
SN74AUC1G04	5	Single Inverter Gates	✓	✓			SCES370
SN74AUC1GU04	5	Single Inverter Gates	✓	✓			SCES371
SN74AUP1G04	5	Low-Power Single Inverter Gates		✓			SCES571
SN74LVC1G04	5	Single Inverters	✓	✓			SCES214
SN74LVC1GU04	5	Single Inverters	✓	✓			SCES215
SN74AUC2G04	6	Dual Inverters	✓	✓			SCES437
SN74AUC2GU04	6	Dual Inverters	+	✓			SCES438
SN74LVC2G04	6	Dual Inverters	✓	✓			SCES195
SN74LVC2GU04	6	Dual Inverters	✓	✓			SCES197
SN74AUC3G04	8	Triple Inverters	+	+			Call
SN74AUC3GU04	8	Triple Inverters	+	+			Call
SN74LVC3G04	8	Triple Inverters	✓		✓	✓	SCES363
SN74LVC3GU04	8	Triple Inverters	✓		+	+	SCES539
SN74AUC1G06	5	Single Inverter Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES372

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			DSBGA	SOT	SSOP	VSSOP	
SN74LVC1G06	5	Single Inverter Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES295
SN74AUC2G06	6	Dual Inverter Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES442
SN74LVC2G06	6	Dual Inverter Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES307
SN74AUC3G06	8	Triple Inverter Buffers/Drivers with Open-Drain Outputs	+	+			Call
SN74LVC3G06	8	Triple Inverter Buffers/Drivers with Open-Drain Outputs	✓		✓	✓	SCES364
SN74AUC1G07	5	Single Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES373
SN74LVC1G07	5	Single Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES296
SN74AUC2G07	6	Dual Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES443
SN74LVC2G07	6	Dual Buffers/Drivers with Open-Drain Outputs	✓	✓			SCES308
SN74AUC3G07	8	Triple Buffers/Drivers with Open-Drain Outputs	+	+			Call
SN74LVC3G07	8	Triple Buffers/Drivers with Open-Drain Outputs	✓		✓	✓	SCES365
SN74AHC1G08	5	Single 2-Input AND Gates		✓			SCLS314
SN74AHCT1G08	5	Single 2-Input AND Gates		✓			SCLS315
SN74AUC1G08	5	Single 2-Input AND Gates	✓	✓			SCES374
SN74AUP1G08	5	Low-Power Single 2-Input Positive-AND Gates	✓	✓			SCES502
SN74LVC1G08	5	Single 2-Input AND Gates	✓	✓			SCES217
SN74AUC2G08	8	Dual 2-Input AND Gates	✓	✓		✓	SCES477
SN74LVC2G08	8	Dual 2-Input AND Gates	✓		✓	✓	SCES198
SN74AUC1G10	6	Single 3-Input Positive-NAND Gates	+	+			Call
SN74LVC1G10	6	Single 3-Input Positive-NAND Gates	✓	✓			SCES486
SN74AUC1G11	6	Single 3-Input Positive-AND Gates	+	+			Call
SN74LVC1G11	6	Single 3-Input Positive-AND Gates	✓	✓			SCES487
SN74AHC1G14	5	Single Schmitt-Trigger Inverters		✓			SCLS321
SN74AHCT1G14	5	Single Schmitt-Trigger Inverters		✓			SCLS322
SN74AUC1G14	5	Single Schmitt-Trigger Inverters	✓	✓			SCES375
SN74AUP1G14	5	Low-Power Single Schmitt-Trigger Inverters		✓			SCES578
SN74LVC1G14	5	Single Schmitt-Trigger Inverters	✓	✓			SCES218
SN74AUC2G14	6	Dual Schmitt-Trigger Inverters	+	+			Call
SN74LVC2G14	6	Dual Schmitt-Trigger Inverters	✓	✓			SCES200
SN74AUC3G14	8	Triple Schmitt-Trigger Inverters	+	+			Call
SN74LVC3G14	8	Triple Schmitt-Trigger Inverters	✓		✓	✓	SCES367
SN74AUC1G17	5	Single Schmitt-Trigger Buffers	✓	✓			SCES376
SN74AUP1G17	5	Low-Power Single Schmitt-Trigger Buffers		✓			SCES579
SN74LVC1G17	5	Single Schmitt-Trigger Buffers	✓	✓			SCES351
SN74AUC2G17	6	Dual Schmitt-Trigger Buffers	+	+			Call
SN74LVC2G17	6	Dual Schmitt-Trigger Buffers	✓	✓			SCES381
SN74AUC3G17	8	Triple Schmitt-Trigger Buffers	+	+			Call
SN74AUC1G18	6	1-of-2 Noninverting Demultiplexers with 3-State Deselected Output	+	+			Call
SN74LVC1G18	6	1-of-2 Noninverting Demultiplexers with 3-State Deselected Output	✓	✓			SCES406
SN74AUC1G19	6	1-of-2 Decoders/Demultiplexers	✓	✓			SCES626
SN74AUC1G27	6	Single 3-Input Positive-NOR Gates	+	+			Call
SN74LVC1G27	6	Single 3-Input Positive-NOR Gates	✓	✓			SCES488
SN74AHC1G32	5	Single 2-Input OR Gates		✓			SCLS317
SN74AHCT1G32	5	Single 2-Input OR Gates		✓			SCLS320

DEVICE SELECTION GUIDE

LITTLE LOGIC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			DSBGA	SOT	SSOP	VSSOP	
SN74AUC1G32	5	Single 2-Input-OR Gates	✓	✓			SCES377
SN74AUP1G32	5	Low-Power Single 2-Input OR Gates		✓			SCES580
SN74LVC1G32	5	Single 2-Input OR Gates	✓	✓			SCES219
SN74AUC2G32	8	Dual 2-Input OR Gates	✓	✓		✓	SCES478
SN74LVC2G32	8	Dual 2-Input OR Gates	✓		✓	✓	SCES201
SN74LVC1G34	5	Single Buffer Gates	✓				SCES519
SN74AUC2G34	6	Dual Buffer Gates	✓	✓			SCES514
SN74LVC2G34	6	Dual Buffer Gates	✓	✓			SCES359
SN74AUC3G34	8	Triple Buffer Gates	+	+			Call
SN74LVC3G34	8	Triple Buffer Gates	✓		✓	✓	SCES366
SN74LVC1G38	5	Single 2-Input NAND Gates with Open-Drain Outputs	✓				SCES538
SN74AUC2G53	8	Analog Multiplexers/Demultiplexers	+	+	✓	✓	SCES484
SN74LVC2G53	8	Analog Multiplexers/Demultiplexers	✓		✓	✓	SCES324
SN74AUC1G57	6	Configurable Multiple-Function Gates	+	+			Call
SN74AUP1G57	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES503
SN74LVC1G57	6	Configurable Multiple-Function Gates	✓	✓			SCES414
SN74AUC1G58	6	Configurable Multiple-Function Gates	+	+			Call
SN74AUP1G58	6	Low-Power Configurable Multiple-Function Gates		✓			SCES504
SN74LVC1G58	6	Configurable Multiple-Function Gates	✓	✓			SCES415
SN74AUC1G66	5	Single Bilateral Switches	✓	✓			SCES386
SN74LVC1G66	5	Single Bilateral Switches	✓	✓			SCES323
SN74AUC2G66	8	Dual Bilateral Switches	✓	+		✓	SCES507
SN74LVC2G66	8	Dual Bilateral Switches	✓		✓	✓	SCES325
SN74AUC1G74	8	Single Positive-Edge-Triggered D-Type Flip-Flops with Clear and Preset	✓		✓	✓	SCES537
SN74AUC2G74	8	Dual Edge-Triggered D-Type Flip-Flops with Clear and Preset	+	+			Call
SN74LVC2G74	8	Dual Edge-Triggered D-Type Flip-Flops with Clear and Preset	✓		✓	✓	SCES203
SN74AUC1G79	5	Single Positive-Edge-Triggered D-Type Flip-Flops	✓	✓			SCES387
SN74LVC1G79	5	Single Edge-Triggered D-Type Flip-Flops	✓	✓			SCES220
SN74AUC2G79	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓	✓		✓	SCES536
SN74AUC1G80	5	Single Positive-Edge-Triggered D-Type Flip-Flops	✓	✓			SCES388
SN74AUP1G80	5	Low-Power Single Positive-Edge-Triggered D-Type Flip-Flops		✓			SCES593
SN74LVC1G80	5	Single Edge-Triggered D-Type Flip-Flops	✓	✓			SCES221
SN74AUC2G80	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓	+	✓	✓	SCES540
SN74AHC1G86	5	Single 2-Input Exclusive-OR Gates		✓			SCLS323
SN74AHCT1G86	5	Single 2-Input Exclusive-OR Gates		✓			SCLS324
SN74AUC1G86	5	Single 2-Input Exclusive-OR Gates	✓				SCES389
SN74LVC1G86	5	Single 2-Input Exclusive-OR Gates	✓	✓			SCES222
SN74AUC2G86	8	Dual 2-Input Exclusive-OR Gates	✓	✓		+	SCES479
SN74LVC2G86	8	Dual 2-Input Exclusive-OR Gates	✓		✓	✓	SCES360
SN74AUC1G97	6	Configurable Multiple-Function Gates	✓	✓			SCES387
SN74AUP1G97	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES505
SN74LVC1G97	6	Configurable Multiple-Function Gates	✓	✓			SCES416
SN74AUC1G98	6	Configurable Multiple-Function Gates	+	+			Call
SN74AUP1G98	6	Low-Power Configurable Multiple-Function Gates	✓	✓			SCES506

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			DSBGA	SOT	SSOP	VSSOP	
SN74LVC1G98	6	Configurable Multiple-Function Gates	✓	✓			SCES417
SN74AHC1G125	5	Single Bus Buffers with 3-State Outputs		✓			SCLS377
SN74AHCT1G125	5	Single Bus Buffers with 3-State Outputs		✓			SCLS378
SN74AUC1G125	5	Single Bus Buffers with 3-State Outputs	✓	✓			SCES382
SN74CBT1G125	5	Single FET Bus Switches		✓			SCDS046
SN74CBTD1G125	5	Single FET Bus Switches with Level Shifting		✓			SCDS063
SN74CBTLV1G125	5	Single FET Bus Switches		✓			SCDS057
SN74LVC1G125	5	Single Bus Buffers with 3-State Outputs	✓	✓			SCES223
SN74AUC2G125	8	Dual Bus Buffer Gates with 3-State Outputs	✓	✓		✓	SCES532
SN74LVC2G125	8	Dual Bus Buffer Gates with 3-State Outputs	✓	✓		✓	SCES204
SN74AHC1G126	5	Single Bus Buffers with 3-State Outputs		✓			SCLS379
SN74AHCT1G126	5	Single Bus Buffers with 3-State Outputs		✓			SCLS380
SN74AUC1G126	5	Single Bus Buffers with 3-State Outputs	✓	✓			SCES383
SN74LVC1G126	5	Single Bus Buffers with 3-State Outputs	✓	✓			SCES224
SN74AUC2G126	8	Dual Bus Buffers with 3-State Outputs	✓	✓	✓	✓	SCES533
SN74LVC2G126	8	Dual Bus Buffers with 3-State Outputs	✓		✓	✓	SCES205
SN74AUC2G157	8	Dual 2-to-1 Line Data Selectors/Multiplexers	+	+			Call
SN74LVC2G157	8	Dual 2-to-1 Line Data Selectors/Multiplexers	✓		✓	✓	SCES207
SN74AUC1G240	5	Single Buffers/Drivers with 3-State Outputs	✓	✓			SCES384
SN74LVC1G240	5	Single Buffers/Drivers with 3-State Outputs	✓	✓			SCES305
SN74AUC2G240	8	Dual Buffers/Drivers with 3-State Outputs	+	+			Call
SN74LVC2G240	8	Dual Buffers/Drivers with 3-State Outputs	✓		✓	✓	SCES208
SN74AUC2G241	8	Dual Buffers/Drivers with 3-State Outputs	+	+	✓	✓	SCES535
SN74LVC2G241	8	Dual Buffers/Drivers with 3-State Outputs	✓		✓	✓	SCES210
SN74AUC2G257	8	Dual 2-1 Line Data Selectors/Multiplexers with 3-State Outputs	✓	✓		✓	SCES534
SN74AUC1G332	6	Single 3-Input Positive-OR Gates	+	+			Call
SN74LVC1G332	6	Single 3-Input Positive-OR Gates	✓	✓			SCES489
SN74LVC1G373	6	Single D-Type Latches with 3-State Outputs	✓				SCES528
SN74LVC1G374	6	Single D-Type Flip-Flops with 3-State Outputs	✓				SCES520
SN74CBT1G384	5	Single FET Bus Switches		✓			SCDS065
SN74CBTD1G384	5	Single FET Bus Switches with Level Shifting		✓			SCDS066
SN74AUC1G386	6	Single 3-Input Positive-XOR Gates	+	+			Call
SN74LVC1G386	6	Single 3-Input Positive-XOR Gates	✓	✓			SCES349
SN74LVC1G3157	6	Single-Pole Double-Throw Analog Switches	✓	✓			SCES424

LS

Low-Power Schottky Logic

With a wide array of functions, TI's LS family continues to offer replacement alternatives for mature systems. This classic line of devices was at the cutting edge of performance when introduced, and it continues to deliver excellent value for many of today's designs. As the world leader in logic products, TI is committed to being the last major supplier at every price-performance node.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

LS

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74LS00	14	Quad 2-Input NAND Gates	✓	✓	✓	✓	✓	SDLS025
SN74LS00	8	Quad 2-Input NAND Gates	✓			✓		SDLS026
SN74LS02	14	Quad 2-Input NOR Gates	✓	✓	✓	✓		SDLS027
SN74LS03	14	Quad 2-Input NAND Gates with Open-Collector Outputs	✓	✓	✓	✓		SDLS028
SN74LS04	14	Hex Inverters	✓	✓	✓	✓		SDLS029
SN74LS05	14	Hex Inverters with Open-Collector Outputs	✓	✓	✓	✓	✓	SDLS030
SN74LS06	14	Hex Inverter Buffers/Drivers with Open-Collector Outputs	✓	✓	✓	✓	✓	SDLS020
SN74LS07	14	Hex Buffers/Drivers with Open-Collector Outputs	✓	✓	✓	✓	✓	SDLS021
SN74LS08	14	Quad 2-Input AND Gates	✓	✓	✓	✓	✓	SDLS033
SN74LS09	14	Quad 2-Input AND Gates with Open-Collector Outputs	✓	✓	✓	✓		SDLS034
SN74LS10	14	Triple 3-Input NAND Gates	✓	✓	✓	✓		SDLS035
SN74LS11	14	Triple 3-Input AND Gates	✓	✓	✓	✓		SDLS131
SN74LS14	14	Hex Schmitt-Trigger Inverters	✓	✓	✓		✓	SDLS049
SN74LS19A	14	Hex Schmitt-Trigger Inverters		✓	✓	✓		SDLS138
SN74LS20	14	Dual 4-Input NAND Gates	✓	✓	✓	✓		SDLS079
SN74LS21	14	Dual 4-Input AND Gates	✓	✓	✓	✓		SDLS139
SN74LS26	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDLS087
SN74LS27	14	Triple 3-Input NOR Gates	✓	✓	✓	✓		SDLS089
SN74LS30	14	8-Input NAND Gates	✓	✓	✓	✓		SDLS099
SN74LS31	16	Hex Delay Elements for Generating Delay Lines	✓	✓	✓	✓		SDLS157
SN74LS32	14	Quad 2-Input OR Gates	✓	✓	✓	✓		SDLS100
SN74LS33	14	Quad 2-Input NOR Gates	✓	✓	✓	✓		SDLS101
SN74LS37	14	Quad 2-Input NAND Gates	✓	✓		✓		SDLS103
SN74LS38	14	Quad 2-Input NAND Gates	✓	✓	✓	✓		SDLS105
SN74LS42	16	4-Line BCD to 10-Line Decimal Decoders	✓	✓	✓	✓		SDLS109
SN74LS47	16	BCD to 7-Segment Decoders/Drivers	✓	✓	✓	✓		SDLS111
SN74LS51	14	Dual 2-Wide 2-Input, 2-Wide 3-Input AND-OR-Invert Gates	✓	✓	✓	✓		SDLS113
SN74LS73A	14	Dual J-K Edge-Triggered Flip-Flops with Reset	✓	✓	✓			SDLS118
SN74LS74A	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓	✓		SDLS119
SN74LS75	16	4-Bit Bistable Latches	✓	✓	✓	✓		SDLS120
SN74LS85	16	4-Bit Magnitude Comparators	✓	✓	✓	✓		SDLS123
SN74LS86A	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓	✓		SDLS124

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74LS90	14	Decade Counters	✓	✓	✓			SDLS940
SN74LS92	14	Divide-by-12 Counters	✓	✓	✓	✓		SDLS940
SN74LS93	14	4-Bit Binary Counters	✓	✓	✓	✓		SDLS940
SN74LS96	16	5-Bit Shift Registers	✓	✓	✓			SDLS946
SN74LS107A	14	Dual Negative-Edge-Triggered J-K Flip-Flops with Reset	✓	✓	✓	✓		SDLS036
SN74LS109A	16	Dual Positive-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓		SDLS037
SN74LS112A	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓	✓		SDLS011
SN74LS122	14	Retriggerable Monostable Multivibrators		✓	✓	✓		SDLS043
SN74LS123	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓	✓	✓		SDLS043
SN74LS125A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓		SDLS044
SN74LS126A	14	Quad Bus Buffers with 3-State Outputs		✓	✓	✓		SDLS044
SN74LS132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓	✓	✓		SDLS047
SN74LS136	14	Quad Exclusive-OR Gates with Open-Collector Outputs	✓	✓	✓	✓		SDLS048
SN74LS138	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓	✓		SDLS014
SN74LS139A	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓	✓		SDLS013
SN74LS145	16	BCD-to-Decimal Decoders/Drivers	✓	✓	✓	✓		SDLS051
SN74LS148	16	8-to-3 Line Priority Encoders	✓	✓	✓	✓		SDLS053
SN74LS151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓	✓		SDLS054
SN74LS153	16	Dual 1-of-4 Data Selectors/Multiplexers	✓	✓	✓	✓		SDLS055
SN74LS155A	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓	✓		SDLS057
SN74LS156	16	Dual 2-to-4 Line Decoders/Demultiplexers with Open-Collector Outputs	✓	✓	✓	✓		SDLS057
SN74LS157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		SDLS058
SN74LS158	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓	✓		SDLS058
SN74LS161A	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		SDLS060
SN74LS163A	16	Synchronous 4-Bit Binary Counters	✓	✓	✓	✓		SDLS060
SN74LS164	14	8-Bit Serial-In, Parallel-Out Shift Registers	✓	✓	✓	✓		SDLS061
SN74LS165A	16	8-Bit Parallel-In, Serial-Out Shift Registers	✓	✓	✓	✓		SDLS062
SN74LS166A	16	8-Bit Parallel-Load Shift Registers	✓	✓	✓	✓		SDLS063
SN74LS169B	16	Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDLS134
SN74LS170	16	4-by-4 Register Files with Open-Collector Outputs	✓	✓	✓			SDLS065
SN74LS173A	16	Quad D-Type Flip-Flops with 3-State Outputs	✓	✓	✓	✓		SDLS067
SN74LS174	16	Hex D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDLS068
SN74LS175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDLS068
SN74LS181	24	Arithmetic Logic Units/Function Generators	✓	✓				SDLS136
SN74LS191	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDLS072
SN74LS193	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓	✓		SDLS074
SN74LS194A	16	4-Bit Bidirectional Universal Shift Registers	✓	✓	✓			SDLS075
SN74LS221	16	Dual Monostable Multivibrators with Schmitt-Trigger Inputs	✓	✓	✓	✓		SDLS213
SN74LS240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDLS144
SN74LS241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓		SDLS144
SN74LS243	14	Quad Bus Transceivers with 3-State Outputs	✓	✓	✓		✓	SDLS145
SN74LS244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDLS144
SN74LS245	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	SDLS146
SN74LS247	16	BCD to 7-Segment Decoders/Drivers with Open-Collector Outputs		✓	✓	✓		SDLS083

DEVICE SELECTION GUIDE

LS

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74LS251	16	1-of-8 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDLS085
SN74LS253	16	Dual 1-of-4 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDLS147
SN74LS257B	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDLS148
SN74LS258B	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓	✓		SDLS148
SN74LS259B	16	8-Bit Addressable Latches	✓	✓	✓	✓		SDLS086
SN74LS266	14	Quad 2-Input Exclusive-NOR Gates with Open-Collector Outputs	✓	✓	✓	✓		SDLS151
SN74LS273	20	Octal D-Type Flip-Flops with Clear	✓	✓	✓	✓		SDLS090
SN74LS279A	16	Quad \bar{S} - \bar{R} Latches	✓	✓	✓	✓		SDLS093
SN74LS280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓	✓	✓		SDLS152
SN74LS283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓	✓	✓		SDLS095
SN74LS292	16	Programmable Frequency Dividers/Digital Timers		✓				SDLS153
SN74LS293	14	4-Bit Binary Counters	✓	✓	✓			SDLS097
SN74LS294	16	Programmable Frequency Dividers/Digital Timers		✓				SDLS153
SN74LS297	16	Digital Phase-Locked Loops		✓				SDLS155
SN74LS298	16	Quad 2-Input Multiplexers with Storage	✓	✓	✓			SDLS098
SN74LS299	20	8-Bit Universal Shift/Storage Registers	✓	✓	✓			SDLS156
SN74LS321	16	Crystal-Controlled Oscillators	✓	✓				SDLS158
SN74LS348	16	8-Line to 3-Line Priority Encoders	✓	✓	✓	✓		SDLS161
SN74LS365A	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓		SDLS102
SN74LS367A	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓		SDLS102
SN74LS368A	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs	✓	✓	✓	✓		SDLS102
SN74LS373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓		SDLS165
SN74LS374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓	✓	✓	SDLS165
SN74LS375	16	4-Bit Bistable Latches	✓	✓	✓	✓		SDLS166
SN74LS377	20	Octal D-Type Flip-Flops with Enable	✓	✓	✓	✓		SDLS167
SN74LS378	16	Hex D-Type Flip-Flops with Enable	✓	✓	✓	✓		SDLS167
SN74LS390	16	Dual 4-Bit Decade Counters	✓	✓	✓	✓		SDLS107
SN74LS393	14	Dual 4-Bit Binary Counters	✓	✓	✓	✓		SDLS107
SN74LS399	16	Quad 2-Input Multiplexers with Storage	✓	✓	✓	✓		SDLS174
SN74LS423	16	Dual Retriggerable Monostable Multivibrators with Reset		✓	✓	✓		SDLS175
SN74LS442	20	Quad Tridirectional Bus Transceivers with 3-State Outputs		✓				SDLS176
SN74LS465	20	Octal Buffers with 3-State Outputs		✓	✓			SDLS179
SN74LS540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDLS180
SN74LS541	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SDLS180
SN74LS590	16	8-Bit Binary Counters with 3-State Output Registers	✓	✓	✓	✓		SDLS003
SN74LS592	16	8-Bit Binary Counters with Input Registers	✓	✓	✓	✓		SDLS004
SN74LS593	20	8-Bit Binary Counters with Input Registers and 3-State I/O Ports	✓	✓	✓	✓		SDLS004
SN74LS594	16	8-Bit Shift Registers with Output Registers		✓		✓		SDLS005
SN74LS595	16	8-Bit Shift Registers with 3-State Output Registers	✓	✓	✓	✓		SDLS006
SN74LS596	16	8-Bit Shift Registers with 3-State Output Latches		✓				SDLS006
SN74LS597	16	8-Bit Shift Registers with Input Latches	✓	✓	✓	✓		SDLS007
SN74LS598	20	8-Bit Shift Registers with Input Latches and 3-State I/O Ports	✓	✓	✓			SDLS007
SN74LS599	16	8-Bit Shift Registers with Output Registers		✓				SDLS005
SN74LS623	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDLS185

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	
SN74LS624	14	Single Voltage-Controlled Oscillators	✓	✓	✓	✓		SDLS186
SN74LS628	14	Single Voltage-Controlled Oscillators	✓	✓	✓	✓		SDLS186
SN74LS629	16	Dual Voltage-Controlled Oscillators	✓	✓	✓	✓		SDLS186
SN74LS640	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDLS189
SN74LS640-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDLS189
SN74LS641	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDLS189
SN74LS641-1	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓			SDLS189
SN74LS642	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓	✓		SDLS189
SN74LS642-1	20	Octal Bus Transceivers with Open-Collector Outputs		✓	✓			SDLS189
SN74LS645	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓		SDLS189
SN74LS645-1	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓		SDLS189
SN74LS646	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓			SDLS190
SN74LS648	24	Octal Registered Bus Transceivers with 3-State Outputs		✓	✓			SDLS190
SN74LS652	24	Octal Bus Transceivers and Registers with 3-State Outputs		✓	✓			SDLS191
SN74LS669	16	Synchronous 4-Bit Up/Down Binary Counters	✓	✓	✓			SDLS192
SN74LS670	16	4-by-4 Register Files with 3-State Outputs	✓	✓	✓	✓		SDLS193
SN74LS673	24	16-Bit Serial In/Out with 16-Bit Parallel-Out Storage Registers	✓	✓	✓			SDLS195
SN74LS674	24	16-Bit Serial In/Out with 16-Bit Parallel-Out Storage Registers	✓	✓	✓			SDLS195
SN74LS682	20	8-Bit Magnitude Comparators	✓	✓	✓	✓		SDLS008
SN74LS684	20	8-Bit Magnitude Comparators	✓	✓	✓	✓		SDLS008
SN74LS688	20	8-Bit Magnitude Comparators	✓	✓	✓	✓		SDLS008
SN74LS697	20	Synchronous 4-Bit Up/Down Binary Counters with Output Registers and Multiplexed 3-State Outputs	✓	✓	✓	✓		SDLS199

LV-A

Low-Voltage CMOS Technology Logic

TI's entire LV-A family has been redesigned for better flexibility in 3.3-V or 5-V systems. LV-A devices (e.g., 'LV00A, 'LV02A) have improved operating characteristics and new features, such as 5-V tolerance, faster performance, and partial power down.

The LV-A series of devices has expanded its voltage operation range (2-V to 5.5-V V_{CC}), while still having a static power consumption of only 20 μ A for both bus-interface and gate functions. The LV family now has propagation delays of 5.4 ns typical at 3.3 V (SN74LV244A) and provides 8 mA of current drive. With an I_{off} specification of only 5 μ A, these devices have the capability of partially powering down. In addition, the typical output V_{OH} undershoot (V_{OHV}) has been improved to >2.3 V at 3.3-V V_{CC} for quieter operation.

New key features:

- Support mixed-mode voltage operation on all ports
- I_{off} for partial power down
- 14 ns maximum at 3.3-V V_{CC} for buffers

The LV family is offered in the octal footprints, with advanced packaging such as plastic dual-in-line package (PDIP), quad flatpack no-lead (QFN) package, small-outline integrated circuit (SOIC), small-outline package (SOP), shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin very small-outline package (TVSOP). Selected LV devices are offered in the MicroStar Jr.™ (VFBGA) package.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

LV-A

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE	
			PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
SN74LV00A	14	Quad 2-Input NAND Gates		✓	✓	✓	✓	✓	✓		SCLS389
SN74LV02A	14	Quad 2-Input NOR Gates		✓	✓	✓	✓	✓	✓		SCLS390
SN74LV04A	14	Hex Inverters		✓	✓	✓	✓	✓	✓		SCLS388
SN74LVU04A	14	Hex Unbuffered Inverters			✓	✓	✓	✓	✓		SCES130
SN74LV05A	14	Hex Inverters with Open-Drain Outputs			✓	✓	✓	✓	✓		SCLS391
SN74LV06A	14	Hex Inverter Buffers/Drivers with Open-Drain Outputs			✓	✓	✓	✓	✓		SCES336
SN74LV07A	14	Hex Buffers/Drivers with Open-Drain Outputs			✓	✓	✓	✓	✓		SCES337
SN74LV08A	14	Quad 2-Input AND Gates		✓	✓	✓	✓	✓	✓		SCLS387
SN74LV10A	14	Triple 3-Input NAND Gates			✓	✓	✓	✓	✓		SCES338
SN74LV11A	14	Triple 3-Input AND Gates			✓	✓	✓	✓	✓		SCES345
SN74LV14A	14	Hex Schmitt-Trigger Inverters		✓	✓	✓	✓	✓	✓		SCLS386
SN74LV20A	14	Dual 4-Input NAND Gates			✓	✓	✓	✓	✓		SCES339
SN74LV21A	14	Dual 4-Input AND Gates			✓	✓	✓	✓	✓		SCES340
SN74LV27A	14	Triple 3-Input NOR Gates			✓	✓	✓	✓	✓		SCES341
SN74LV32A	14	Quad 2-Input OR Gates		✓	✓	✓	✓	✓	✓		SCLS385
SN74LV74A	14	Dual D-Type Flip-Flops with Set and Reset		✓	✓	✓	✓	✓	✓		SCLS381
SN74LV86A	14	Quad 2-Input Exclusive-OR Gates			✓	✓	✓	✓	✓		SCLS392
SN74LV123A	16	Dual Retriggerable Monostable Multivibrators with Reset		✓	✓	✓	✓	✓	✓		SCLS393
SN74LV125A	14	Quad Bus Buffers with 3-State Outputs	✓	✓	✓	✓	✓	✓	✓		SCES124
SN74LV126A	14	Quad Bus Buffers with 3-State Outputs			✓	✓	✓	✓	✓		SCES131
SN74LV132A	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs			✓	✓	✓	✓	✓		SCLS394
SN74LV138A	16	3-to-8 Line Inverting Decoders/Demultiplexers		✓	✓	✓	✓	✓	✓		SCLS395
SN74LV139A	16	Dual 2-to-4 Line Decoders/Demultiplexers		✓	✓	✓	✓	✓	✓		SCLS396
SN74LV157A	14	Quad 2-to-4 Line Data Selectors/Multiplexers			✓	✓	✓	✓	✓		SCLS397
SN74LV161A	16	Synchronous 4-Bit Binary Counters			✓	✓	✓	✓	✓		SCLS404
SN74LV163A	16	Synchronous 4-Bit Binary Counters		✓	✓	✓	✓	✓	✓		SCLS405
SN74LV164A	14	8-Bit Serial-In, Parallel-Out Shift Registers			✓	✓	✓	✓	✓		SCLS403
SN74LV165A	16	8-Bit Parallel-In, Serial-Out Shift Registers		✓	✓	✓	✓	✓	✓		SCLS402
SN74LV166A	16	8-Bit Parallel-Load Shift Registers			✓	✓	✓	✓	✓		SCLS456
SN74LV174A	16	Hex D-Type Flip-Flops with Clear			✓	✓	✓	✓	✓		SCLS401
SN74LV175A	16	Quad D-Type Flip-Flops with Clear			✓	✓	✓	✓	✓		SCLS400

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY							LITERATURE REFERENCE	
			PDIP	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
SN74LV221A	16	Dual Monostable Multivibrators with Schmitt-Trigger Inputs			✓	✓	✓	✓	✓		SCLS450
SN74LV240A	20	Octal Buffers/Drivers with 3-State Outputs			✓	✓	✓	✓	✓		SCLS384
SN74LV244A	20	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓	✓	✓		SCLS383
SN74LV245A	20	Octal Bus Transceivers with 3-State Outputs		✓	✓	✓	✓	✓	✓	✓	SCLS382
SN74LV273A	20	Octal D-Type Flip-Flops with Clear		✓	✓	✓	✓	✓	✓		SCLS399
SN74LV367A	16	Hex Buffers/Line Drivers with 3-State Outputs			✓	✓	✓	✓	✓		SCLS398
SN74LV373A	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓	✓	✓	✓	SCLS407
SN74LV374A	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	✓	✓	SCLS408
SN74LV393A	14	Dual 4-Bit Binary Counters			✓	✓	✓	✓	✓		SCLS457
SN74LV540A	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓	✓	✓		SCLS409
SN74LV541A	20	Octal Buffers and Line Drivers with 3-State Outputs		✓	✓	✓	✓	✓	✓		SCLS410
SN74LV573A	20	Octal Transparent D-Type Latches with 3-State Outputs		✓	✓	✓	✓	✓	✓	✓	SCLS411
SN74LV574A	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓	✓	✓	✓	✓	✓	✓	SCLS412
SN74LV594A	16	8-Bit Shift Registers with Output Registers			✓	✓	✓	✓			SCLS413
SN74LV595A	16	8-Bit Shift Registers with 3-State Output Registers		✓	✓	✓	✓	✓			SCLS414
SN74LV4040A	16	12-Stage Ripple-Carry Binary Counters/Dividers	✓	✓	✓	✓	✓	✓	✓		SCES226
SN74LV4051A	16	8-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion	✓	✓	✓	✓	✓	✓	✓		SCLS428
SN74LV4052A	16	Dual 4-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion	✓	✓	✓	✓	✓	✓	✓		SCLS429
SN74LV4053A	16	Triple 2-Channel Analog Multiplexers/Demultiplexers with Logic Level Conversion	✓	✓	✓	✓	✓	✓	✓		SCLS430
SN74LV4066A	14	Quad Bilateral Switches	✓	✓	✓	✓	✓	✓	✓		SCLS427
SN74LV8151	24	10-Bit Universal Schmitt-Trigger Buffers with 3-State Outputs	✓		✓			✓	✓		SCES610
SN74LV8153	20	Serial-to-Parallel Interfaces	✓					✓			SCLS555
SN74LV8154	20	Dual 16-Bit Binary Counters with 3-State Output Registers	✓					✓			SCLS589
SN74LV161284A	48	19-Bit Bus Interfaces					✓	✓			SCLS426

LV-AT

Low-Voltage CMOS Technology Logic – TTL Compatible

The LV-AT family is the only 5-V logic family from TI that offers TTL-compatible inputs, as well as the I_{off} feature. LV-AT devices offer lower static power consumption compared with similar families from competitors. LV-AT devices also feature input and output over-voltage tolerance when compared with ACT, HCT, and AHCT devices. TTL-compatible inputs allow interface with older bipolar devices and with 3.3-V LVTTL devices (3.3-V to 5-V up translation). The I_{off} feature allows use of these devices in partial power-down applications.

LV-AT devices are offered in advanced QFN packaging, which affords better electrical and thermal performance. The small footprint of QFN packages makes LV-AT devices an ideal choice in portable applications.

Features:

- TTL-compatible inputs
- I_{off} supports partial power-down applications
- $V_{OLP} < 0.8$ -ground bounce and $V_{OHV} > 2.3$ -V output V_{OH} undershoot
- 1-ns maximum output skew (channel to channel)
- 20- μ A maximum static power consumption

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

LV-AT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY					LITERATURE REFERENCE
			QFN	SOIC	SOP	TSSOP	TVSOP	
SN74LV244AT	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SCES572
SN74LV245AT	20	Octal Bus Transceivers with 3-State Outputs	✓	✓	✓	✓	✓	SCLS605
SN74LV541AT	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓	✓	✓	SCES573
SN74LV573AT	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓	✓	✓	SCES574

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



LVC

Low-Voltage CMOS Technology Logic

TI's LVC products are specially designed for 3-V power supplies.

The LVC family is a high-performance version, with 0.8- μ CMOS process technology, 24-mA current drive, and 6.5-ns maximum propagation delays for driver operations. The LVC family includes both bus-interface and gate functions, with 60 different functions planned.

The LVC family is offered in the octal and Widebus™ footprints, with advanced packaging such as plastic dual-in-line package (PDIP), quad flatpack no-lead (QFN) package, small-outline transistor (SOT), small-outline integrated circuit (SOIC), small-outline package (SOP), shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), very small-outline package (TVSOP), and very thin shrink small-outline package (VSSOP). Selected devices are offered in NanoStar™/NanoFree™ (DSBGA) packages and the MicroStar BGA™ (LFBGA) and MicroStar Jr.™ (VFBGA) packages.

All LVC devices are available with 5-V-tolerant inputs and outputs.

An extensive line of single gates is planned in the LVC family.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

LVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
SN74LVC1G00	5	Single 2-Input NAND Gates	✓							✓					SCES212
SN74LVC1G02	5	Single 2-Input NOR Gates	✓							✓					SCES213
SN74LVC1G04	5	Single Inverters	✓							✓					SCES214
SN74LVC1GU04	5	Single Inverters	✓							✓					SCES215
SN74LVC1GX04	5	Crystal Oscillator Drivers	✚							✓					SCES581
SN74LVC1G06	5	Single Inverting Buffers/Drivers with Open-Drain Outputs	✓							✓					SCES295
SN74LVC1G07	5	Single Buffers/Drivers with Open-Drain Outputs	✓							✓					SCES296
SN74LVC1G08	5	Single 2-Input AND Gates	✓							✓					SCES217
SN74LVC1G0832	6	Single 3-Input AND-OR Gates	✚							✓					SCES606
SN74LVC1G10	6	Single 3-Input Positive-NAND Gates	✓							✓					SCES486
SN74LVC1G11	6	Single 3-Input Positive-AND Gates	✓							✓					SCES487
SN74LVC1G14	5	Single Schmitt-Trigger Inverters	✓							✓					SCES218
SN74LVC1G17	5	Single Schmitt-Trigger Buffers	✓							✓					SCES351
SN74LVC1G18	6	1-of-2 Noninverting Demultiplexers with 3-State Deselected Output	✓							✓					SCES406
SN74LVC1G19	6	1-of-2 Decoders/Demultiplexers	✓							✓					SCES464
SN74LVC1G27	6	Single 3-Input Positive-NOR Gates	✓							✓					SCES488
SN74LVC1G29	8	2-of-3 Decoders/Demultiplexers	✓								✓			✓	SCES569
SN74LVC1G32	5	Single 2-Input OR Gates	✓							✓					SCES219

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 16/20/24 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP		
SN74LVC1G3208	6	Single 3-Input Positive OR-AND Gates	✚							✓						SCES605
SN74LVC1G34	5	Single Buffer Gates	✓							✓						SCES519
SN74LVC1G38	5	Single 2-Input NAND Gates with Open-Drain Outputs	✓							✓						SCES538
SN74LVC1G57	6	Configurable Multiple-Function Gates	✓							✓						SCES414
SN74LVC1G58	6	Configurable Multiple-Function Gates	✓							✓						SCES415
SN74LVC1G66	5	Single Bilateral Switches	✓							✓						SCES323
SN74LVC1G79	5	Single Edge-Triggered D-Type Flip-Flops	✓							✓						SCES220
SN74LVC1G80	5	Single Edge-Triggered D-Type Flip-Flops	✓							✓						SCES221
SN74LVC1G86	5	Single 2-Input Exclusive-OR Gates	✓							✓						SCES222
SN74LVC1G97	6	Configurable Multiple-Function Gates	✓							✓						SCES416
SN74LVC1G98	6	Configurable Multiple-Function Gates	✓							✓						SCES417
SN74LVC1G99	8	Ultra-Configurable Multi-Function Gates with 3-State Outputs	✓								✓				✓	SCES609
SN74LVC1G123	8	Single Retriggerable Monostable Multivibrators with Schmitt-Trigger Inputs									✓				✓	SCES586
SN74LVC1G125	5	Single Bus Buffers with 3-State Outputs	✓							✓						SCES223
SN74LVC1G126	5	Single Bus Buffers with 3-State Outputs	✓							✓						SCES224
SN74LVC1G132	5	Single 2-Input NAND Gates with Schmitt-Trigger Inputs	✓							✓						SCES546
SN74LVC1G139	8	2-Line to 4-Line Decoders									✓				✓	SCES602
SN74LVC1G175	6	Single D-Type Flip-Flops with Asynchronous Clear	✓							✓						SCES560
SN74LVC1G240	5	Single Buffers/Drivers with 3-State Outputs	✓							✓						SCES305
SN74LVC1G332	6	Single 3-Input Positive-OR Gates	✓							✓						SCES489
SN74LVC1G373	6	Single D-Type Latches with 3-State Outputs	✓							✓						SCES528
SN74LVC1G374	6	Single D-Type Flip-Flops with 3-State Outputs	✓							✓						SCES520
SN74LVC1G386	6	Single 3-Input Positive-XOR Gates	✓							✓						SCES349

DEVICE SELECTION GUIDE

LVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP		
SN74LVC1G3157	6	Single-Pole Double-Throw Analog Switches	✓							✓						SCES424
SN74LVC1T45	6	Single-Bit Dual-Support Bus Transceivers with Configurable Voltage Translation and 3-State Outputs	✓							✓						SCES515
SN74LVC2G00	8	Dual 2-Input NAND Gates	✓								✓				✓	SCES193
SN74LVC2G02	8	Dual 2-Input NOR Gates	✓								✓				✓	SCES194
SN74LVC2G04	5	Dual Inverters	✓							✓						SCES195
SN74LVC2GU04	5	Dual Inverters	✓							✓						SCES197
SN74LVC2G06	5	Dual Inverter Buffers/Drivers with Open-Drain Outputs	✓							✓						SCES307
SN74LVC2G07	5	Dual Buffers/Drivers with Open-Drain Outputs	✓							✓						SCES308
SN74LVC2G08	8	Dual 2-Input AND Gates	✓								✓				✓	SCES198
SN74LVC2G14	6	Dual Schmitt-Trigger Inverters	✓							✓						SCES200
SN74LVC2G17	6	Dual Schmitt-Trigger Buffers	✓							✓						SCES381
SN74LVC2G32	8	Dual 2-Input OR Gates	✓								✓				✓	SCES201
SN74LVC2G34	5	Dual Buffer Gates	✓							✓						SCES359
SN74LVC2G38	8	Dual 2-Input NAND Gates with Open-Drain Outputs	✓								✓				✓	SCES554
SN74LVC2G53	8	Analog Multiplexers/ Demultiplexers	✓								✓				✓	SCES324
SN74LVC2G66	8	Dual Bilateral Analog Switches	✓								✓				✓	SCES325
SN74LVC2G74	8	Dual Edge-Triggered D-Type Flip-Flops with Preset and Clear	✓								✓				✓	SCES203
SN74LVC2G79	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓								✓				✓	SCES498
SN74LVC2G80	8	Dual Positive-Edge-Triggered D-Type Flip-Flops	✓								✓				✓	SCES309
SN74LVC2G86	8	Dual 2-Input Exclusive-OR Gates	✓								✓				✓	SCES360
SN74LVC2G125	8	Dual Bus Buffers with 3-State Outputs	✓								✓				✓	SCES204
SN74LVC2G126	8	Dual Bus Buffer Gates with 3-State Outputs	✓								✓				✓	SCES205
SN74LVC2G132	8	Dual 2-Input NAND Gates with Schmitt-Trigger Inputs	✓								✓				✓	SCES547

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE		
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP	
SN74LVC2G157	8	Dual 2-to-1 Line Data Selectors/Multiplexers	✓								✓				✓	SCES207
SN74LVC2G240	8	Dual Buffers/Drivers with 3-State Outputs	✓								✓				✓	SCES208
SN74LVC2G241	8	Dual Buffers/Drivers with 3-State Outputs	✓								✓				✓	SCES210
SN74LVC2T45	8	Dual-Bit Dual-Supply Transceivers with Configurable Voltage Translation and 3-State Outputs	✓								✓				✓	SCES516
SN74LVC3G04	8	Triple Inverters	✓								✓				✓	SCES363
SN74LVC3GU04	8	Triple Inverters	✓								✓				✓	SCES539
SN74LVC3G06	8	Triple Inverting Buffers/Drivers with Open-Drain Outputs	✓								✓				✓	SCES364
SN74LVC3G07	8	Triple Buffers/Drivers with Open-Drain Outputs	✓								✓				✓	SCES365
SN74LVC3G14	8	Triple Schmitt-Trigger Inverters	✓								✓				✓	SCES367
SN74LVC3G17	8	Triple Schmitt-Trigger Buffers	✓								✓				✓	SCES470
SN74LVC3G34	8	Triple Buffer Gates	✓								✓				✓	SCES366
SN74LVC00A	14	Quad 2-Input NAND Gates				✓	✓	✓			✓	✓				SCAS279
SN74LVC02A	14	Quad 2-Input NOR Gates				✓	✓	✓			✓	✓				SCAS280
SN74LVC04A	14	Hex Inverters				✓	✓	✓			✓	✓	✓			SCAS281
SN74LVCU04A	14	Hex Unbuffered Inverters					✓	✓			✓	✓	✓			SCAS282
SN74LVC06A	14	Hex Inverter Buffers/Drivers with Open-Drain Outputs				✓	✓	✓			✓	✓	✓			SCAS596
SN74LVC07A	14	Hex Buffers/Drivers with Open-Drain Outputs				✓	✓	✓			✓	✓	✓			SCAS595
SN74LVC08A	14	Quad 2-Input AND Gates				✓	✓	✓			✓	✓				SCAS283
SN74LVC10A	14	Triple 3-Input NAND Gates				✓	✓	✓			✓	✓				SCAS284
SN74LVC14A	14	Hex Schmitt-Trigger Inverters				✓	✓	✓			✓	✓	✓			SCAS285
SN74LVC32A	14	Quad 2-Input OR Gates				✓	✓	✓			✓	✓				SCAS286
SN74LVC74A	14	Dual D-Type Flip-Flops with Set and Reset					✓	✓			✓	✓				SCAS287
SN74LVC86A	14	Quad 2-Input Exclusive-OR Gates					✓	✓			✓	✓				SCAS288
SN74LVC112A	16	Dual Negative-Edge Triggered J-K Flip-Flops with Set and Reset					✓	✓			✓	✓	✓			SCAS289
SN74LVC125A	14	Quad Bus Buffers with 3-State Outputs				✓	✓	✓			✓	✓				SCAS290
SN74LVC126A	14	Quad Bus Buffers with 3-State Outputs				✓	✓	✓			✓	✓	✓			SCAS339

DEVICE SELECTION GUIDE

LVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
SN74LVC138A	16	3-to-8 Line Inverting Decoders/Demultiplexers				✓	✓	✓			✓	✓	✓	✓	SCAS291
SN74LVC139A	16	Dual 2-to-4 Line Decoders/Demultiplexers				✓	✓	✓			✓	✓			SCAS341
SN74LVC157A	16	Quad 2-to-4 Line Data Selectors/Multiplexers				✓	✓	✓			✓	✓			SCAS292
SN74LVC240A	20	Octal Buffers/Drivers with 3-State Outputs					✓	✓			✓	✓	✓		SCAS293
SN74LVCZ240A	20	Octal Buffers/Drivers with 3-State Outputs			✓			✓	✓		✓	✓	✓		SCES273
SN74LVC244A	20	Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓	✓			✓	✓	✓	✓	SCAS414
SN74LVCH244A	20	Octal Buffers and Line Drivers with 3-State Outputs					✓	✓			✓	✓	✓		SCES009
SN74LVCZ244A	20	Octal Buffers and Line Drivers with 3-State Outputs			✓			✓	✓		✓	✓			SCES274
SN74LVC245A	20	Octal Bus Transceivers with 3-State Outputs			✓	✓	✓	✓			✓	✓	✓	✓	SCAS218
SN74LVCH245A	20	Octal Bus Transceivers with 3-State Outputs					✓	✓			✓	✓	✓	✓	SCES008
SN74LVCZ245A	20	Octal Bus Transceivers with 3-State Outputs			✓			✓	✓		✓	✓			SCES275
SN74LVC257A	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs				✓	✓	✓			✓	✓			SCAS294
SN74LVC373A	20	Octal Transparent D-Type Latches with 3-State Outputs			✓	✓	✓	✓			✓	✓	✓	✓	SCAS295
SN74LVC374A	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs			✓			✓	✓		✓	✓	✓		SCAS296
SN74LVC540A	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs					✓	✓			✓	✓	✓		SCAS297
SN74LVC541A	20	Octal Buffers and Line Drivers with 3-State Outputs					✓	✓			✓	✓	✓		SCAS298
SN74LVC543A	24	Octal Registered Transceivers with 3-State Outputs					✓				✓	✓			SCAS299
SN74LVC573A	20	Octal Transparent D-Type Latches with 3-State Outputs			✓			✓	✓		✓	✓	✓	✓	SCAS300
SN74LVC574A	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs			✓			✓	✓		✓	✓	✓	✓	SCAS301
SN74LVC646A	24	Octal Registered Bus Transceivers with 3-State Outputs					✓	✓			✓				SCAS302

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP	
SN74LVC652A	24	Octal Bus Transceivers and Registers with 3-State Outputs					✓	✓		✓	✓				SCAS303
SN74LVC821A	24	10-Bit Bus-Interface Flip-Flops with 3-State Outputs					✓	✓		✓	✓	✓			SCAS304
SN74LVC823A	24	9-Bit Bus-Interface Flip-Flops with 3-State Outputs					✓	✓		✓	✓	✓			SCAS305
SN74LVC827A	24	10-Bit Buffers/Drivers with 3-State Outputs					✓	✓		✓	✓	✓			SCAS306
SN74LVC828A	24	10-Bit Buffers/Drivers with 3-State Outputs					✓	✓		✓	✓	✓			SCAS347
SN74LVC841A	24	10-Bit Bus-Interface D-Type Latches with 3-State Outputs					✓			✓	✓	✓			SCAS307
SN74LVC861A	24	10-Bit Transceivers with 3-State Outputs					✓	✓		✓	✓	✓			SCAS309
SN74LVC863A	24	9-Bit Bus Transceivers with 3-State Outputs					✓	✓		✓	✓	✓			SCAS310
SN74LVC1404	8	Oscillator Drivers for Crystal Oscillator or Ceramic Resonator	✓							✓				✓	SCES469
SN74LVC2244A	20	Octal Buffers/Line Drivers with Series Damping Resistors and 3-State Outputs					✓	✓		✓	✓	✓			SCAS572
SN74LVCR2245A	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs					✓	✓		✓	✓	✓	✓		SCAS581
SN74LVC2952A	24	Octal Bus Transceivers and Registers with 3-State Outputs					✓	✓		✓	✓				SCAS311
SN74LVCC3245A	24	Octal Bus Transceivers with Adjustable Output Voltage and 3-State Outputs					✓	✓		✓	✓				SCAS585
SN74LVC4245A	24	Octal Bus Transceivers and 3.3-V to 5-V Shifters with 3-State Outputs					✓			✓	✓				SCAS375
SN74LVCC4245A	24	Octal Dual-Supply Bus Transceivers with Configurable Output Voltage and 3-State Outputs					✓	✓		✓	✓				SCAS584
SN74LVCH16240A	48	16-Bit Buffers/Drivers with 3-State Outputs								✓	✓				SCAS566
SN74LVCZ16240A	48	16-Bit Buffers/Drivers with 3-State Outputs								✓	✓	✓			SCES276
SN74LVC16244A	48	16-Bit Buffers/Drivers with 3-State Outputs								✓	✓	✓	✓		SCES061

DEVICE SELECTION GUIDE

LVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP		
SN74LVCH16244A	48	16-Bit Buffers/Drivers with 3-State Outputs									✓	✓	✓	✓		SCAS313
SN74LVZ16244A	48	16-Bit Buffers/Drivers with 3-State Outputs									✓	✓	✓			SCES277
SN74LVC16245A	48	16-Bit Bus Transceivers with 3-State Outputs									✓	✓	✓	✓		SCES062
SN74LVCH16245A	48	16-Bit Bus Transceivers with 3-State Outputs									✓	✓	✓	✓		SCES063
SN74LVCHR16245A	48	16-Bit Bus Transceivers with 3-State Outputs									✓	✓	✓	✓		SCAS582
SN74LVCR16245A	48	16-Bit Bus Transceivers with 3-State Outputs									✓	✓	✓	✓		SCES427
SN74LVZ16245A	48	16-Bit Bus Transceivers with 3-State Outputs									✓	✓	✓			SCES278
SN74LVC16373A	48	16-Bit Transparent D-Type Latches with 3-State Outputs									✓	✓	✓	✓		SCAS662
SN74LVCH16373A	48	16-Bit Transparent D-Type Latches with 3-State Outputs									✓	✓	✓	✓		SCAS568
SN74LVC16374A	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs									✓	✓	✓	✓		SCAS663
SN74LVCH16374A	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs									✓	✓	✓	✓		SCAS565
SN74LVCH16540A	48	16-Bit Buffers/Drivers with 3-State Outputs									✓	✓	✓			SCAS569
SN74LVCH16541A	48	16-Bit Buffers/Drivers with 3-State Outputs									✓	✓	✓			SCAS567
SN74LVC16543	56	16-Bit Registered Transceivers with 3-State Outputs									✓	✓				Call
SN74LVCH16543A	56	16-Bit Registered Transceivers with 3-State Outputs									✓	✓	✓			SCAS317
SN74LVC16646A	56	16-Bit Bus Transceivers and Registers with 3-State Outputs									✓	✓	✓			SCES408
SN74LVCH16646A	56	16-Bit Bus Transceivers and Registers with 3-State Outputs									✓	✓	✓			SCAS318
SN74LVC16652	56	16-Bit Bus Transceivers and Registers with 3-State Outputs									✓					Call
SN74LVCH16652A	56	16-Bit Bus Transceivers and Registers with 3-State Outputs									✓	✓	✓			SCAS319
SN74LVCH16901	64	18-Bit Universal Bus Transceivers with Parity Generators/Checkers										✓				SCES145

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA	VSSOP		
SN74LVCH16952A	56	16-Bit Registered Transceivers with 3-State Outputs									✓	✓	✓			SCAS320
SN74LVCZ32240A	96	32-Bit Buffers/Drivers with 3-State Outputs		✓												SCES421
SN74LVC32244	96	32-Bit Buffers/Drivers with 3-State Outputs		✓												SCES342
SN74LVCH32244A	96	32-Bit Buffers/Drivers with 3-State Outputs		✓												SCAS617
SN74LVCZ32244A	96	32-Bit Buffers/Drivers with 3-State Outputs		✓												SCES422
SN74LVC32245	96	32-Bit Bus Transceivers with 3-State Outputs		✓												SCES343
SN74LVCH32245A	96	32-Bit Bus Transceivers with 3-State Outputs		✓												SCAS616
SN74LVCHR32245A	96	32-Bit Bus Transceivers with 3-State Outputs		✓												SCES601
SN74LVCR32245A	96	32-Bit Bus Transceivers with 3-State Outputs		✓												SCES428
SN74LVCZ32245A	96	32-Bit Bus Transceivers with 3-State Outputs		✓												SCES423
SN74LVC32373A	96	32-Bit Transparent D-Type Latches with 3-State Outputs		✓												SCES575
SN74LVCH32373A	96	32-Bit Transparent D-Type Latches with 3-State Outputs		✓												SCAS618
SN74LVC32374A	96	32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓												SCES407
SN74LVCH32374A	96	32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓												SCAS619
SN74LVC161284	48	19-Bit Bus Interfaces									✓	✓				SCAS583
SN74LVCE161284	48	19-Bit IEEE Std 1284 Translation Transceivers with Error-Free Power Up									✓	✓	✓			SCES541
SN74LVCZ161284A	48	19-Bit IEEE Std 1284 Bus Interfaces										✓				SCES358
SN74LVC162244A	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs									✓	✓	✓	✓		SCAS664
SN74LVCH162244A	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs									✓	✓	✓			SCAS545

DEVICE SELECTION GUIDE

LVC

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY											LITERATURE REFERENCE	
			DSBGA	LFBGA	PDIP	QFN	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VFBGA		VSSOP
SN74LVCR162245	48	16-Bit Bus Transceivers with Series Damping Resistors and 3-State Outputs									✓	✓	✓	✓	SCES047
SN74LVCH322244A	96	32-Bit Buffers/Drivers with 3-State Outputs		✓											SCES405

LVT

Low-Voltage BiCMOS Technology Logic

LVT is a 5-V-tolerant, 3.3-V product using 0.72- μ BiCMOS technology, with performance specifications ideal for workstation, networking, and telecommunications applications. LVT delivers 3.5-ns propagation delays at 3.3 V (28% faster than ABT at 5 V), current drive of 64 mA, and pin-for-pin compatibility with existing ABT families.

LVT operates at LVTTTL signal levels in telecom and networking high-performance system point-to-point or distributed backplane applications. LVT is an excellent migration path from ABT.

In addition to popular octal and Widebus™ bus-interface devices, TI also offers UBT™ transceivers and selected functions in Widebus+™ in this low-voltage family.

Performance characteristics of the LVT family are:

- 3.3-V operation with 5-V-tolerant I/Os – Permits use in a mixed-voltage environment
- Speed – Provides high-performance with maximum propagation delays of 3.5 ns at 3.3 V for buffers
- Drive – Provides up to 64 mA of drive at 3.3-V V_{CC} , yet consumes less than 330 μ W of standby power

Additional features include:

- Hot insertion – LVT devices incorporate I_{off} and power-up 3-state (PU3S) circuitry to protect the devices in live-insertion applications and make them ideally suited for hot-insertion applications. I_{off} prevents the devices from being damaged during partial power down, and PU3S forces the outputs to the high-impedance state during power up and power down.
- Bus-hold option – Eliminates floating inputs by holding them at the last valid logic state. This eliminates the need for external pullup and pulldown resistors.

Additional features (continued):

- Damping-resistor option – TI implements series damping resistors on selected devices, which not only reduces overshoot and undershoot, but also matches the line impedance, minimizing ringing.
- Packaging – LVT devices are available in the quad flatpack no-lead (QFN) package, small-outline integrated circuit (SOIC), small-outline package (SOP), shrink small-outline package (SSOP), thin shrink small-outline package (TSSOP), and thin very small-outline package (TVSOP). Select devices are offered in the MicroStar BGA™ (LFBGA) and MicroStar Jr.™ (VFBGA) packages.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			MIL	LFBGA	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
LVT Octals (SN74LVTxxx, SN74LVTHxxx)												
SN74LVT125	14	Quad Bus Buffers with 3-State Outputs	✓			✓	✓	✓	✓			SCBS133
SN74LVTH125	14	Quad Bus Buffers with 3-State Outputs				✓	✓	✓	✓	✓		SCBS703
SN74LVTH126	14	Quad Bus Buffers with 3-State Outputs				✓	✓	✓	✓	✓		SCBS746
SN74LVT240	20	Octal Buffers/Drivers with 3-State Outputs							✓			Call
SN74LVT240A	20	Octal Buffers/Drivers with 3-State Outputs				✓	✓	✓	✓			SCBS134
SN74LVTH240	20	Octal Buffers/Drivers with 3-State Outputs			✓	✓	✓	✓	✓		✓	SCBS679
SN74LVTH241	20	Octal Buffers/Drivers with 3-State Outputs				✓	✓	✓	✓			SCAS352
SN74LVT244B	20	Octal Buffers and Line Drivers with 3-State Outputs			✓	✓	✓	✓	✓		✓	SCAS354
SN74LVTH244A	20	Octal Buffers and Line Drivers with 3-State Outputs	✓		✓	✓	✓	✓	✓		✓	SCAS586
SN74LVT245B	20	Octal Bus Transceivers with 3-State Outputs			✓	✓	✓	✓	✓		✓	SCES004
SN74LVTH245A	20	Octal Bus Transceivers with 3-State Outputs	✓		✓	✓	✓	✓	✓		✓	SCBS130
SN74LVTR245	20	3.3-V ABT Octal Bus Transceivers with 3-State Outputs and Series Resistors					✓		✓			SCAS428
SN74LVTH273	20	Octal D-Type Flip-Flops with Clear				✓	✓	✓	✓			SCBS136
SN74LVTH373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓			✓	✓	✓	✓			SCBS689
SN74LVTH374	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓			✓	✓	✓	✓			SCBS683
SN74LVTH540	20	Inverting Octal Buffers and Line Drivers with 3-State Outputs				✓	✓	✓	✓			SCBS681
SN74LVTH541	20	Octal Buffers and Line Drivers with 3-State Outputs				✓	✓	✓	✓			SCBS682
SN74LVTH543	24	Octal Registered Transceivers with 3-State Outputs				✓	✓	✓	✓	✓		SCBS704
SN74LVTH573	20	Octal Transparent D-Type Latches with 3-State Outputs	✓		✓	✓	✓	✓	✓		✓	SCBS687
SN74LVTH574	20	Octal Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓		✓	✓	✓	✓	✓		✓	SCBS688
SN74LVTH646	24	Octal Registered Bus Transceivers with 3-State Outputs	✓			✓	✓	✓	✓	✓		SCBS705
SN74LVTH652	24	Octal Bus Transceivers and Registers with 3-State Outputs				✓	✓	✓	✓	✓		SCBS706

commercial package description and availability

DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✦ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

DEVICE SELECTION GUIDE

LVT

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY									LITERATURE REFERENCE
			MIL	LFBGA	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP	VFBGA	
SN74LVT2952	24	Octal Bus Transceivers and Registers with 3-State Outputs							✓			SCBS152
LVT Widebus™ (SN74LVTH16xxx)												
SN74LVT16240	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCBS717
SN74LVTH16240	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCBS684
SN74LVTH16241	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCBS693
SN74LVT16244B	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓	✓	✓	SCBS716
SN74LVTH16244A	48	16-Bit Buffers/Drivers with 3-State Outputs	✓					✓	✓	✓	✓	SCBS142
SN74LVT16245B	48	16-Bit Bus Transceivers with 3-State Outputs						✓	✓	✓	✓	SCBS715
SN74LVTH16245A	48	16-Bit Bus Transceivers with 3-State Outputs	✓					✓	✓	✓	✓	SCBS143
SN74LVTH16373	48	16-Bit Transparent D-Type Latches with 3-State Outputs	✓					✓	✓		✓	SCBS144
SN74LVTH16374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓					✓	✓		✓	SCBS145
SN74LVTH16500	56	18-Bit Universal Bus Transceivers with 3-State Outputs						✓	✓		✓	SCBS701
SN74LVTH16501	56	18-Bit Universal Bus Transceivers with 3-State Outputs	✓					✓	✓			SCBS700
SN74LVTH16541	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCBS691
SN74LVTH16543	56	16-Bit Registered Transceivers with 3-State Outputs						✓	✓			SCBS699
SN74LVTH16646	56	16-Bit Bus Transceivers and Registers with 3-State Outputs						✓	✓			SCBS698
SN74LVTH16652	56	16-Bit Bus Transceivers and Registers with 3-State Outputs						✓	✓			SCBS150
SN74LVTH16835	56	18-Bit Universal Bus Drivers with 3-State Outputs						✓	✓			SCBS713
SN74LVTH16952	56	16-Bit Registered Transceivers with 3-State Outputs	✓					✓	✓			SCBS697
SN74LVTH162373	48/56	3.3-V ABT 16-Bit Transparent D-Type Latches with 3-State Outputs						✓		✓	✓	SCBS261
LVT Widebus-™ (SN74LVTH32xxx)												
SN74LVT32240	96	32-Bit Buffers/Drivers with 3-State Outputs		✓								SCBS747
SN74LVT32244	96	32-Bit Buffers/Drivers with 3-State Outputs		✓								SCBS748
SN74LVTH32244	96	32-Bit Buffers/Drivers with 3-State Outputs		✓								SCBS749
SN74LVT32245	96	32-Bit Bus Transceivers with 3-State Outputs		✓								SCBS750
SN74LVTH32245	96	32-Bit Bus Transceivers with 3-State Outputs		✓								SCBS750
SN74LVTH32373	96	32-Bit Transparent D-Type Latches with 3-State Outputs		✓								SCBS751
SN74LVTH32374	96	32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓								SCBS752
SN74LVTH322374	96	3.3-V ABT 32-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs		✓								SCBS754

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY								LITERATURE REFERENCE	
			MIL	LFBGA	QFN	SOIC	SOP	SSOP	TSSOP	TVSOP		VFBGA
LVT Octals/Widebus™ With Series Damping Resistors (SN74LVTH2xxx, SN74LVTH162xxx)												
SN74LVTH2245	20	Octal Bus Transceivers with Series Damping Resistors and 3-State Outputs				✓	✓	✓	✓	✓		SCBS707
SN74LVTH2952	24	Octal Bus Transceivers and Registers with 3-State Outputs				✓	✓	✓	✓			SCBS710
SN74LVT162240	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓	✓		SCBS719
SN74LVTH162240	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓			SCBS685
SN74LVTH162241	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓			SCBS692
SN74LVT162244A	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs						✓	✓	✓	✓	SCBS718
SN74LVTH162244	48	16-Bit Buffers/Drivers with Series Damping Resistors and 3-State Outputs	✓					✓	✓		✓	SCBS258
SN74LVT162245A	48	16-Bit Bus Transceivers with Series Damping Resistors and 3-State Outputs						✓	✓		✓	SCBS714
SN74LVTH162245	48	16-Bit Bus Transceivers with Series Damping Resistors and 3-State Outputs	✓					✓	✓		✓	SCBS260
SN74LVTH162373	48	16-Bit Transparent D-Type Latches with 3-State Outputs	✓					✓	✓		✓	SCBS261
SN74LVTH162374	48	16-Bit Edge-Triggered D-Type Flip-Flops with 3-State Outputs	✓					✓	✓		✓	SCBS262
SN74LVTH162541	48	16-Bit Buffers/Drivers with 3-State Outputs						✓	✓			SCBS690

PCA/PCF

I²C Inter-Integrated Circuit Applications

The I²C bus is a bidirectional two-wire bus for communicating between integrated circuits. The PCA and PCF devices offered by TI are general-purpose logic to be used with the I²C or system management (SM) bus protocols.

DEVICE SELECTION GUIDE

PCA/PCF

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			PDIP	QFN	QSOP	SOIC	SSOP	TSSOP	
PCA8550	16	Nonvolatile 5-Bit Registers with I ² C Interface				✓	✓	✓	SCPS050
PCA9306	8	Dual Bidirectional I ² C Bus and Voltage-Level Translators					✓		SCPS113
PCF8574	16/20	Remote 8-Bit I/O Expanders for I ² C Bus	✓	✓		✓		✓	SCPS068
PCF8574A	16/20	Remote 8-Bit I/O Expanders for I ² C Bus	✓	✓		✓		✓	SCPS069
PCF8575	24	Remote 16-Bit I ² C and SMBus I/O Expanders with Interrupt Output		+	✓	+		✓	SCPS121
PCF8575C	24	Remote 16-Bit I ² C and SMBus I/O Expanders with Interrupt Output			✓	✓		✓	SCPS123

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



S **Schottky Logic**

With a wide array of functions, TI's S family continues to offer replacement alternatives for mature systems. This classic line of devices was at the cutting edge of performance when introduced, and it continues to deliver excellent value for many of today's designs. As the world leader in logic products, TI is committed to being the last major supplier at every price-performance node.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

S

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
SN74S00	14	Quad 2-Input NAND Gates	✓	✓	✓				SDLS025
SN74S02	14	Quad 2-Input NOR Gates	✓	✓	✓				SDLS027
SN74S04	14	Hex Inverters	✓	✓	✓				SDLS029
SN74S05	14	Hex Inverters with Open-Collector Outputs	✓	✓	✓				SDLS030
SN74S08	14	Quad 2-Input AND Gates	✓	✓	✓				SDLS033
SN74S09	14	Quad 2-Input AND Gates with Open-Collector Outputs	✓	✓	✓				SDLS034
SN74S10	14	Triple 3-Input NAND Gates	✓	✓	✓				SDLS035
SN74S20	14	Dual 4-Input NAND Gates	✓	✓	✓				SDLS079
SN74S32	14	Quad 2-Input OR Gates	✓	✓	✓				SDLS100
SN74S37	14	Quad 2-Input NAND Gates	✓	✓	✓				SDLS103
SN74S38	14	Quad 2-Input NAND Gates	✓	✓	✓				SDLS105
SN74S51	14	Dual 2-Wide 2-Input AND-OR-Invert Gates	✓	✓	✓				SDLS113
SN74S74	14	Dual D-Type Flip-Flops with Set and Reset	✓	✓	✓				SDLS119
SN74S85	16	4-Bit Magnitude Comparators	✓	✓	✓				SDLS123
SN74S86	14	Quad 2-Input Exclusive-OR Gates	✓	✓	✓				SDLS124
SN74S112A	16	Dual Negative-Edge-Triggered J-K Flip-Flops with Set and Reset	✓	✓	✓				SDLS011
SN74S124	16	Dual Voltage Controlled Oscillators	✓	✓	✓				SDLS201
SN74S132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓	✓				SDLS047
SN74S133	16	13-Input NAND Gates	✓	✓	✓				SDLS202
SN74S138A	16	3-to-8 Line Inverting Decoders/Demultiplexers	✓	✓	✓				SDLS014
SN74S139A	16	Dual 2-to-4 Line Decoders/Demultiplexers	✓	✓	✓				SDLS013
SN74S140	14	Dual 4-Input Positive-NAND 50-Ω Line Drivers	✓	✓	✓				SDLS210
SN74S151	16	1-of-8 Data Selectors/Multiplexers	✓	✓	✓				SDLS054
SN74S157	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓				SDLS058
SN74S158	16	Quad 2-to-4 Line Data Selectors/Multiplexers	✓	✓	✓				SDLS058
SN74S163	16	Synchronous 4-Bit Binary Counters	✓	✓					SDLS060
SN74S174	16	Hex D-Type Flip-Flops with Clear	✓	✓					SDLS068
SN74S175	16	Quad D-Type Flip-Flops with Clear	✓	✓	✓				SDLS068
SN74S182	16	Look-Ahead Carry Generators	✓	✓					SDLS206
SN74S240	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓				SDLS144
SN74S241	20	Octal Buffers/Drivers with 3-State Outputs	✓	✓	✓				SDLS144
SN74S244	20	Octal Buffers and Line Drivers with 3-State Outputs	✓	✓	✓				SDLS144

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGQ = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY						LITERATURE REFERENCE
			MIL	PDIP	SOIC	SOP	SSOP	TSSOP	
SN74S257	16	Quad 1-of-2 Data Selectors/Multiplexers with 3-State Outputs	✓	✓	✓				SDLS148
SN74S260	14	Dual 5-Input NOR Gates	✓	✓	✓				SDLS208
SN74S280	14	9-Bit Odd/Even Parity Generators/Checkers	✓	✓					SDLS152
SN74S283	16	9-Bit Binary Full Adders with Fast Carry	✓	✓					SDLS095
SN74S373	20	Octal Transparent D-Type Latches with 3-State Outputs	✓	✓	✓				SDLS165
SN74S374	20	Octal D-Type Edge-Triggered Flip-Flops with 3-State Outputs	✓	✓	✓				SDLS165
SN74S381	20	Arithmetic Logic Units/Function Generators	✓	✓					SDLS168
SN74S1050	16	12-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓				SDLS015
SN74S1051	16	12-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓	✓			SDLS018
SN74S1052	20	16-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓	✓			SDLS016
SN74S1053	20	16-Bit Schottky Barrier Diode Bus-Termination Arrays		✓	✓	✓	✓	✓	SDLS017

Signal Switch

The TI Signal Switch product portfolio consists of analog switches and multiplexers, digital bus-exchange/multiplexing switches, and digital bus switches providing high-performance, low-power replacements for standard bus-interface devices when signal buffering (current drive) is not required. Availability in advanced packaging allows TI Signal Switches to occupy reduced board area in space-constrained applications. TI Signal Switches optimize next-generation datacom, networking, computing, portable-communications, and consumer-electronic designs by supporting both digital and analog applications.

Signal switches include products in these logic technology families:

- CB3Q – Low-Voltage, High-Bandwidth Bus-Switch Technology
- CB3T – Low-Voltage, Translator Bus-Switch Technology
- CBT – Crossbar Technology
- CBT – C-CBT with undershoot protection
- CBTLV – Low-Voltage Crossbar Technology
- CD4000 – CMOS Logic

For more information about the entire Signal Switch portfolio see www.ti.com/signalswitches.

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
Analog Switches and Multiplexers																
SN74AUC1G66	5	Single Bilateral Analog Switches							✓						✓	SCES386
SN74LVC1G66	5	Single Analog Switches							✓						✓	SCES323
SN74AUC2G53	8	Single-Pole Double-Throw (SPDT) Analog Switches or 2:1 Analog Multiplexers/ Demultiplexers								✓			✓		✓	SCES484
SN74LVC2G53	8	Single-Pole Double-Throw (SPDT) Analog Switches or 2:1 Analog Multiplexers/ Demultiplexers								✓			✓		✓	SCES324
SN74AUC2G66	8	Dual Bilateral Analog Switches								✓			✓		✓	SCES507
SN74LVC2G66	8	Dual Analog Switches								✓			✓		✓	SCES325
SN74LVC1G3157	6	Single-Pole Double-Throw (SPDT) Analog Switches							✓						✓	SCES424
CD4016B	14	CMOS Quad Bilateral Switches				✓	✓	✓			✓					SCHS026
CD74HC4016	14	High-Speed CMOS Logic Quad Bilateral Switches				✓	✓				✓					SCHS199
CD4051B	16	CMOS Single 8-Channel Analog Multiplexers/ Demultiplexers with Logic-Level Conversion				✓	✓	✓			✓					SCHS047
CD74HC4051	16	High-Speed CMOS 8-Channel Analog Multiplexers/ Demultiplexers				✓	✓	✓			✓					SCHS122
CD74HCT4051	16	High-Speed CMOS 8-Channel Analog Multiplexers/ Demultiplexers with TTL Inputs				✓	✓									SCHS122

commercial package description and availability

DSBGA (die-size ball grid array)[†]
 YEA, YZA = 5/6/8 pins
 YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)
 GGM = 80/100 pins
 GKE, ZKE = 96 pins
 GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)
 GQN, ZQN = 20 pins
 GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✚ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)
 P = 8 pins
 N = 14/16/20/24 pins
 NT = 24/28 pins

PLCC (plastic leaded chip carrier)
 FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)
 D = 8/14/16 pins
 DW = 16/18/20/24/28 pins

SOT (small-outline transistor)
 PK = SOT-89
 DBV = SOT-23
 DCY = SOT-223
 DCK = SC-70

QFN (quad flatpack no lead)
 RGY = 14/16/20 pins
 RGQ = 56 pins

QFP (quad flatpack)
 RC = 52 pins (FB only)
 PH = 80 pins (FIFOs only)
 PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)
 PZA = 80 pins

TQFP (plastic thin quad flatpack)
 PAH = 52 pins
 PAG = 64 pins (FB only)
 PM = 64 pins
 PN = 80 pins
 PCA, PZ = 100 pins (FB only)
 PCB = 120 pins (FIFOs only)

SOP (small-outline package)
 PS = 8 pins
 NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)
 DBQ = 16/20/24 pins

SSOP (shrink small-outline package)
 DCT = 8 pins
 DB = 14/16/20/24/28/30/38 pins
 DBQ = 16/20/24 pins
 DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)
 PW = 8/14/16/20/24/28 pins
 DGG = 48/56/64 pins

TVSOP (thin very small-outline package)
 DGV = 14/16/20/24/48/56 pins
 DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)
 DCU = 8 pins



SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
SN74LV4051A	16	8-Channel Analog Multiplexers/ Demultiplexers		✓		✓	✓	✓		✓	✓	✓				SCLS428
CD4052B	16	CMOS Differential 4-Channel Analog Multiplexers/ Demultiplexers with Logic-Level Conversion				✓	✓	✓			✓					SCHS047
CD74HC4052	16	High-Speed CMOS Differential 4-Channel Analog Multiplexers/ Demultiplexers				✓	✓	✓			✓					SCHS122
CD74HCT4052	16	High-Speed CMOS Differential 4-Channel Analog Multiplexers/ Demultiplexers with TTL Inputs				✓	✓									SCHS122
SN74LV4052A	16	Dual 4-Channel Analog Multiplexers/ Demultiplexers		✓		✓	✓	✓		✓	✓	✓				SCLS429
CD4053B	16	CMOS Triple 2-Channel Analog Multiplexers/ Demultiplexers with Logic-Level Conversion				✓	✓	✓			✓					SCHS047
CD74HC4053	16	High-Speed CMOS Triple 2-Channel Analog Multiplexers/ Demultiplexers				✓	✓	✓			✓					SCHS122
CD74HCT4053	16	High-Speed CMOS Triple 2-Channel Analog Multiplexers/ Demultiplexers with TTL Inputs				✓	✓				✓					SCHS122
SN74LV4053A	16	Triple 2-Channel Analog Multiplexers/ Demultiplexers		✓		✓	✓	✓		✓	✓	✓				SCLS430
CD4066B	14	Quadruple Bilateral Analog Switches				✓	✓	✓			✓					SCHS051
CD74HC4066	14	Quadruple Bilateral Analog Switches				✓	✓				✓					SCHS208
CD74HCT4066	14	Quadruple Bilateral Analog Switches				✓	✓									SCHS208
SN74AHC4066	14	Quadruple Bilateral Analog Switches		✓		✓	✓	✓		✓	✓	✓				SCLS511
SN74HC4066	14	Quadruple Bilateral Analog Switches				✓	✓	✓		✓	✓					SCLS325
SN74LV4066A	14	Quadruple Bilateral Analog Switches		✓		✓	✓	✓		✓	✓	✓				SCLS427
CD4067B	24	CMOS Single 16-Channel Analog Multiplexers/ Demultiplexers				✓	✓	✓			✓					SCHS052

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE		
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP	
CD74HC4067	24	High-Speed CMOS 16-Channel Analog Multiplexers/ Demultiplexers				✓	✓			✓							SCHS209
CD74HCT4067	24	High-Speed CMOS 16-Channel Analog Multiplexers/ Demultiplexers with TTL Inputs					✓										SCHS209
CD4097B	24	CMOS Differential 8-Channel Analog Multiplexers/ Demultiplexers				✓	✓	✓			✓						SCHS052
CD74HC4316	16	High-Speed CMOS Quad Analog Switches with Level Translation				✓	✓	✓			✓						SCHS212
CD74HCT4316	16	High-Speed CMOS Quad Analog Switches with Level Translation and TTL Inputs				✓	✓										SCHS212
CD74HC4351	20	High-Speed CMOS 8-Channel Analog Multiplexers/ Demultiplexers with Latch				✓	✓										SCHS213
CD74HCT4351	20	High-Speed CMOS Logic 8-Channel Analog Multiplexers/ Demultiplexers with Latch				✓											SCHS213
CD74HC4352	20	High-Speed CMOS Logic Dual 4-Channel Analog Multiplexers/ Demultiplexers with Latch				✓											SCHS213
SN74HC4851	16	8-Channel Analog Multiplexers/ Demultiplexers with Injection-Current Effect Control				✓	✓				✓	✓					SCLS542
SN74HC4852	16	Dual 4-to-1 Channel Analog Multiplexers/ Demultiplexers with Injection-Current Effect Control				✓	✓				✓	✓					SCLS573

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA	
Digital Bus Exchange/Multiplexing Switches															
SN74CB3Q3251	16	1-of-8 FET Multiplexers/ Demultiplexers 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches		✓						✓	✓	✓			SCDS173
SN74CBT3251	16	1-of-8 FET Multiplexers/ Demultiplexers		✓				✓		✓	✓				SCDS019
SN74CBTLV3251	16	Low-Voltage 1-of-8 FET Multiplexers/ Demultiplexers		✓				✓		✓	✓	✓			SCDS054
SN74CB3Q3253	16	Dual 1-of-4 FET Multiplexers/ Demultiplexers 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches		✓						✓	✓	✓			SCDS145
SN74CB3T3253	16	Dual 1-of-4 FET Multiplexers/ Demultiplexers 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters						✓		✓	✓	✓			SCDS148
SN74CBT3253	16	Dual 1-of-4 FET Multiplexers/ Demultiplexers		✓				✓		✓	✓				SCDS018
SN74CBT3253C	16	Dual 1-of-4 FET Multiplexers/ Demultiplexers with –2-V Undershoot Protection		✓				✓		✓	✓				SCDS123
SN74CBTLV3253	16	Low-Voltage Dual 1-of-4 FET Multiplexers/ Demultiplexers		✓				✓		✓	✓	✓			SCDS039
SN74CB3Q3257	16	4-Bit 1-of-2 FET Multiplexers/ Demultiplexers 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches		✓						✓	✓	✓			SCDS135
SN74CB3T3257	16	4-Bit 1-of-2 FET Multiplexers/ Demultiplexers 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters									✓	✓			SCDS149
SN74CBT3257	16	4-Bit 1-of-2 FET Multiplexers/ Demultiplexers		✓				✓		✓	✓				SCDS017

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
SN74CBT3257C	16	4-Bit 1-of-2 FET Multiplexers/ Demultiplexers with –2-V Undershoot Protection		✓			✓			✓	✓					SCDS137
SN74CBTLV3257	16	Low-Voltage 4-Bit 1-of-2 FET Multiplexers/ Demultiplexers		✓			✓			✓	✓	✓				SCDS040
SN74CBT3383	24	10-Bit FET Bus-Exchange Switches					✓			✓	✓	✓				SCDS013
SN74CBT3383C	24	10-Bit FET Bus-Exchange Switches with –2-V Undershoot Protection					✓			✓	✓	✓				SCDS175
SN74CBTLV3383	24	Low-Voltage 10-Bit FET Bus-Exchange Switches					✓			✓	✓	✓				SCDS047
SN74CBT16209A	48	18-Bit FET Bus-Exchange Switches								✓	✓	✓				SCDS006
SN74CB3T16212	56	24-Bit FET Bus-Exchange Switches 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters									✓	✓		✓		SCDS157
SN74CBT16212A	56	24-Bit FET Bus-Exchange Switches								✓	✓	✓		✓		SCDS007
SN74CBT16212C	56	24-Bit Bus-Exchange Switches with –2-V Undershoot Protection								✓	✓	✓				SCDS146
SN74CBTS16212	56	24-Bit FET Bus-Exchange Switches with Schottky Diode Clamping								✓	✓	✓				SCDS036
SN74CBTLV16212	56	Low-Voltage 24-Bit FET Bus-Exchange Switches								✓	✓	✓				SCDS044
SN74CBT16213	56	24-Bit FET Bus-Exchange Switches								✓	✓					SCDS026
SN74CBT16214C	56	12-Bit 1-of-3 FET Multiplexers/ Demultiplexers with –2-V Undershoot Protection								✓	✓					SCDS121
SN74CBT16232	56	Synchronous 16-Bit 1-of-2 FET Multiplexers/ Demultiplexers								✓	✓					SCDS009
SN74CBT16233	56	16-Bit 1-of-2 FET Multiplexers/ Demultiplexers								✓	✓	✓				SCDS010

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
SN74CBT16292	56	12-Bit 1-of-2 FET Multiplexers/ Demultiplexers with Internal Pulldown Resistors								✓	✓	✓				SCDS053
SN74CBTLV16292	56	Low-Voltage 12-Bit 1-of-2 FET Multiplexers/ Demultiplexers with Internal Pulldown Resistors								✓	✓	✓				SCDS055
SN74CBTLVR16292	56	Low-Voltage 12-Bit 1-of-2 FET Multiplexers/ Demultiplexers with Internal Pulldown Resistors								✓	✓	✓				SCDS056
SN74CBT16390	56	16-Bit to 32-Bit FET Multiplexer/ Demultiplexer Bus Switches								✓	✓	✓				SCDS035
SN74CBT162292	56	12-Bit 1-of-2 FET Multiplexers/ Demultiplexers with Internal Pulldown Resistors								✓	✓	✓				SCDS052
Digital Bus Switches																
SN74CB3T1G125	5	Single FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters							✓							SCDS150
SN74CBTD1G125	5	Single FET Bus Switches with Level Shifting							✓							SCDS063
SN74CBTLV1G125	5	Low-Voltage Single FET Bus Switches							✓							SCDS057
SN74CBT1G125	5	Single FET Bus Switches with Level Shifting							✓							SCDS046
SN74CBTD1G384	5	Single FET Bus Switches with Level Shifting							✓							SCDS066
SN74CBT1G384	5	Single FET Bus Switches with Level Shifting							✓							SCDS065
SN74CB3T3125	14	3.3-V Low-Voltage Quadruple FET Bus Switches with 5-V-Tolerant Level Shifters									✓	✓				SCDS120
SN74CBT3125	14/16	Quadruple FET Bus Switches		✓	✓		✓			✓	✓	✓				SCDS021
SN74CBT3125C	14/16	Quadruple FET Bus Switches with –2-V Undershoot Protection		✓	✓		✓			✓	✓	✓				SCDS122

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY													LITERATURE REFERENCE
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA	WCSP	
SN74CBTLV3125	14/16	Low-Voltage Quadruple FET Bus Switches		✓	✓		✓	✓			✓	✓				SCDS037
SN74CBT3126	14/16	Quadruple FET Bus Switches		✓	✓		✓			✓	✓	✓				SCDS020
SN74CBTLV3126	14/16	Low-Voltage Quadruple FET Bus Switches		✓	✓		✓				✓	✓				SCDS038
SN74CBT3244	20	Octal FET Bus Switches		✓	✓		✓			✓	✓	✓		✓		SCDS011
SN74CBT3244C	20	Octal FET Bus Switches with –2-V Undershoot Protection		✓			✓			✓	✓	✓				SCDS130
SN74CB3Q3245	20	8-Bit 2.5-V/3.3-V Low-Voltage FET Bus Switches		✓						✓	✓	✓		✓		SCDS124
SN74CB3T3245	20	8-Bit FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters					✓			✓	✓	✓				SCDS136
SN74CBT3245A	20	Octal FET Bus Switches		✓	✓		✓			✓	✓	✓		✓		SCDS002
SN74CBT3245C	20	Octal FET Bus Switches with –2-V Undershoot Protection		✓			✓			✓	✓	✓				SCDS131
SN74CBTLV3245A	20	Low-Voltage Octal FET Bus Switches		✓			✓			✓	✓	✓				SCDS034
SN74CB3Q3305	8	Dual FET Bus Switches 2.5-V/3.3-V Low Voltage High Bandwidth									✓		✓			SCDS141
SN74CBT3305C	8	Dual FET Bus Switches with –2-V Undershoot Protection					✓									SCDS125
SN74CBTD3305C	8	Dual FET Bus Switches with –2-V Undershoot Protection and Level Shifting					✓									SCDS126
SN74CB3Q3306A	8	Dual FET 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches														SCDS113
SN74CB3T3306	8	Dual Bus Switch Voltage Translators														SCDS119
SN74CBT3306	8	Dual FET Bus Switches					✓			✓						SCDS016
SN74CBT3306C	8	Dual FET Bus Switches with –2-V Undershoot Protection					✓									SCDS127
SN74CBTD3306	8	Dual FET Bus Switches with Level Shifting					✓									SCDS

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
SN74CBTD3306C	8	Dual FET Bus Switches with Level Shifting and –2-V Undershoot Protection					✓				✓					SCDS128
SN74CB3Q3345	20	8-Bit FET 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches		✓							✓	✓	✓			SCDS144
SN74CBT3345	20	8-Bit FET Bus Switches					✓				✓	✓	✓			SCDS027
SN74CBT3345C	20	8-Bit FET Bus Switches with –2-V Undershoot Protection		✓			✓				✓	✓	✓			SCDS129
SN74CB3Q3384A	24	10-Bit 2.5-V/3.3-V Low-Voltage FET Bus Switches									✓	✓	✓			SCDS114
SN74CB3T3384	24	10-Bit FET Bus Switches 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters					✓				✓	✓	✓			SCDS159
SN74CBT3384A	24	10-Bit FET Bus Switches					✓				✓	✓	✓			SCDS004
SN74CBT3384C	24	10-Bit FET Bus Switches with –2-V Undershoot Protection					✓				✓	✓	✓			SCDS132
SN74CBTD3384	24	10-Bit FET Bus Switches with Level Shifting					✓				✓	✓	✓			SCDS
SN74CBTD3384C	24	10-Bit FET Bus Switches with Level Shifting and –2-V Undershoot Protection					✓				✓	✓	✓			SCDS133
SN74CBTLV3384	24	Low-Voltage 10-Bit FET Bus Switches					✓				✓	✓	✓			SCDS059
SN74CBTS3384	24	10-Bit FET Bus Switches with Schottky Diode Clamping					✓				✓	✓	✓			SCDS024
SN74CBTLV3857	24	Low-Voltage 10-Bit FET Bus Switches with Internal Pulldown Resistors					✓				✓	✓	✓			SCDS085
SN74CBT3861	24	10-Bit FET Bus Switches					✓				✓	✓	✓			SCDS061
SN74CBTD3861	24	10-Bit FET Bus Switches with Level Shifting					✓				✓	✓	✓			SCDS084
SN74CBTLV3861	24	Low-Voltage 10-Bit FET Bus Switches			✓		✓	✓			✓	✓	✓			SCDS041
SN74CBTLV3861-Q1	24	Automotive Catalog Low-Voltage 10-Bit FET Bus Switches										✓				SCDS160

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE	
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP
SN74CB3Q6800	24	10-Bit FET Bus Switches with Precharged Outputs 2.5-V/3.3-V Low Voltage High Bandwidth									✓	✓	✓			SCDS142
SN74CBT6800A	24	10-Bit FET Bus Switches with Precharged Outputs					✓				✓	✓	✓			SCDS005
SN74CBT6800C	24	10-Bit FET Bus Switches with Precharged Outputs for Live Insertion and –2-V Undershoot Protection					✓				✓	✓	✓			SCDS138
SN74CBTK6800	24	10-Bit FET Bus Switches with Precharged Outputs and Active-Clamp Undershoot Circuits					✓				✓	✓	✓			SCDS107
SN74CBTS6800	24	10-Bit FET Bus Switches with Precharged Outputs and Schottky Diode Clamping					✓				✓	✓	✓			SCDS102
SN74CBT6845C	20	8-Bit FET 5-V Bus Switches with Precharged Outputs and –2-V Undershoot Protection		✓				✓			✓	✓	✓			SCDS140
SN74CB3Q16210	48	20-Bit FET Bus Switches 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches									✓	✓	✓			SCDS166
SN74CB3T16210	48	20-Bit FET Bus Switches 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters									✓	✓	✓			SCDS156
SN74CBT16210	48/56	20-Bit FET Bus Switches									✓	✓	✓		+	SCDS033
SN74CBT16210C	48	20-Bit FET Bus Switches with –2-V Undershoot Protection									✓	✓	✓			SCDS115
SN74CBTD16210	48	20-Bit FET Bus Switches with Level Shifting									✓	✓	✓			SCDS049
SN74CBTLV16210	48	Low-Voltage 20-Bit FET Bus Switches									✓	✓	✓			SCDS042
SN74CB3Q16211	56	24-Bit FET 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches									✓	✓	✓		✓	SCDS167

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY												LITERATURE REFERENCE		
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA		WCSP	
SN74CB3T16211	56	24-Bit FET 2.5-V/3.3-V Low-Voltage Bus Switches with 5-V-Tolerant Level Shifters									✓	✓	✓		✓		SCDS147
SN74CBT16211A	56	24-Bit FET Bus Switches									✓	✓	✓		✓		SCDS028
SN74CBT16211C	56	24-Bit FET Bus Switches with –2-V Undershoot Protection									✓	✓	✓				SCDS116
SN74CBTD16211	56	24-Bit FET Bus Switches with Level Shifting									✓	✓	✓				SCDS048
SN74CBTH16211	56	24-Bit FET Bus Switches with Bus Hold									✓	✓	✓				SCDS062
SN74CBTLV16211	56	Low-Voltage 24-Bit FET Bus Switches									✓	✓	✓				SCDS190
SN74CBTS16211	56	24-Bit FET Bus Switches with Schottky Diode Clamping									✓	✓	✓				SCDS050
SN74CB3Q16244	48	16-Bit FET Bus Switches 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches									✓	✓	✓				SCDS168
SN74CBT16244	48	16-Bit FET Bus Switches									✓	✓	✓				SCDS031
SN74CBT16244C	48	16-Bit FET Bus Switches with –2-V Undershoot Protection									✓	✓	✓				SCDS134
SN74CBT16245	48	16-Bit FET Bus Switches									✓	✓	✓				SCDS070
SN74CBT16245-Q1	48	Automotive Catalog 16-Bit FET Bus Switches										✓					SCDS170
SN74CBT16245C	48	16-Bit FET Bus Switches with –2-V Undershoot Protection									✓	✓	✓				SCDS139
SN74CBTK16245	48	16-Bit FET Bus Switches with Active-Clamp Undershoot Protection Circuits									✓	✓	✓				SCDS105
SN74CBT16800	48	20-Bit FET Bus Switches with Precharged Outputs									✓	✓	✓				SCDS090
SN74CBT16800C	48	20-Bit FET Bus Switches with Precharged Outputs and –2-V Undershoot Protection									✓	✓	✓				SCDS117

DEVICE SELECTION GUIDE

SIGNAL SWITCH

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY													LITERATURE REFERENCE
			LFBGA	QFN	QSOP	PDIP	SOIC	SOP	SOT	SSOP	TSSOP	TVSOP	VSSOP	VFBGA	WCSP	
SN74CBTLV16800	48	Low-Voltage 20-Bit FET Bus Switches with Precharged Outputs									✓	✓	✓			SCDS045
SN74CB3Q16811	56	24-Bit FET Switches with Precharged Outputs 2.5-V/3.3-V Low-Voltage High-Bandwidth Bus Switches									✓	✓	✓			SCDS153
SN74CBT16811C	56	24-Bit FET Bus Switches with Precharged Outputs and -2-V Undershoot Protection									✓	✓	✓			SCDS118
SN74CBT16861	48/56	20-Bit FET Bus Switches									✓	✓	✓		✓	SCDS068
SN74CBTR16861	48	20-Bit FET Bus Switches									✓	✓	✓			SCDS078
SN74CB3Q32245	96	32-Bit Bus Switches 2.5-V/3.3-V High Bandwidth	✓													SCDS622
SN74CBT32245	96	32-Bit FET Bus Switches	✓													SCDS104
SN74CBTK32245	96	32-Bit FET Bus Switches with Active Clamp Undershoot Circuits	✓													SCDS106
SN74CBT34X245	80	32-Bit FET Bus Switches										✓				SCDS089

SSTL

Stub Series-Terminated Logic

The SSTL interface is the computer industry's leading choice for next-generation technology in high-speed memory subsystems, adopted by JESD8-8 and JESD8-9 standards developed through the Joint Electronic Device Engineering Committee (JEDEC), and endorsed by major memory-module, workstation, and PC manufacturers.

The SSTL family is optimized for 3.3-V V_{CC} operation. The SN74SSTL16837 is used for driving 3.3-V address signals from a low-voltage memory controller to SDRAMs using SSTL technology. In designs operating at greater than 75 MHz, the SN74SSTL16837 provides fast address signaling with minimal propagation delay. The SN74SSTL16837 converts LVTTTL signals from the memory controller to SSTL signals that are used by the SDRAM input pins. Initially, targeted applications using the device include workstations and servers, with eventual migration to PCs as high-speed memory subsystem technology evolves in desktop systems. For low-voltage solutions, please see the SSTV and SSTVF product lines.

HSTL

High-Speed Transceiver Logic

One of TI's low-voltage interface solutions is HSTL. HSTL devices accept a minimal differential input swing from 0.65 V to 0.85 V (nominally), with the outputs driving LVTTTL levels. HSTL is ideally suited for driving an address bus to two banks of memory. The HSTL input levels follow the JESD8-6 standard.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

SSTL/HSTL

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY TSSOP	LITERATURE REFERENCE
SSTL				
SN74SSTL16837A	64	20-Bit SSTL_3 Interface Universal Bus Drivers with 3-State Outputs	✓	SCBS675
SN74SSTL16847	64	20-Bit SSTL_3 Interface Buffers with 3-State Outputs	✓	SCBS709
SN74SSTL16857	48	14-Bit SSTL_2 Registered Buffers	✓	SCAS625
HSTL				
SN74HSTL16918	48	9-Bit to 18-Bit HSTL-to-LVTTL Memory Address Latches	✓	SCES096
SN74HSTL16919	48	9-Bit to 18-Bit HSTL-to-LVTTL Memory Address Latches with Pullup Resistors	✓	SCES348
SN74HSTL162822	64	14-Bit to 28-Bit HSTL-to-LVTTL Memory Address Latches	✓	SCES091

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



SSTU

Stub Series-Terminated Ultra-Low-Voltage Logic

TI introduces the SN74SSTU32864, which prepares the industry for double-data-rate II (DDR-II) registered dual inline memory modules (RDIMMs). While competitors still are focusing on back filling their DDR-I portfolios, TI again takes the leadership role by being ahead of the market with this register, which is targeted at next-generation DDR-II systems. The SN74SSTU32864 is the world's first DDR-II register that employs output edge-control circuitry similar to the technology used in the successful SSTVF product line. The SN74SSTU32864 has proven simultaneous switching performance in initial prototype DDR-II RDIMMs, enabling high speeds without sacrificing signal integrity. This device is configurable as a 1:1 or 1:2 registered buffer, which makes it flexible enough to be used in a multitude of RDIMM configurations.

TI also offers the SN74SSTU32866 for higher-reliability systems. This register has the capability of adding parity to a DDR-II RDIMM. Additional parity I/Os are introduced for the parity calculation. When two devices are used on a DIMM, the register has the capability of cascading the parity path of the two registers while maintaining the same parity output timing as the single device parity configuration.

SSTU family features:

- Operation at 1.7 V to 1.9 V for PC2-3200 and PC2-4300
- Pinout optimizes DDR-II DIMM PCB layout.
- Chip-select inputs gate the data outputs from changing state and minimize system power consumption.
- Output edge-control circuitry minimizes switching noise in an unterminated line.
- Parity option available

TI provides the complete solution when the CDCU877 PLL clock driver is used. Please see the following table for the device that best fits your application:

DIMM CONFIGURATION	PC2-3200/PC2-4300 DDR2-400/DDR2-533 LOW PROFILE (1U) NON PARITY	PC2-3200/PC2-4300 DDR2-400/DDR2-533 LOW PROFILE (1U) WITH PARITY CHECK
Planar 1 rank of x8 SDRAMs 9 loads	SSTU32864 – 25-bit 1:1 configuration 96-ball LFBGA 1 per DIMM	SSTU32866 – 25-bit 1:1 configuration 96-ball LFBGA 1 per DIMM/uncascaded parity
Planar double-sided 2 rank of x8 SDRAMs 1 rank x4 SDRAMs 18 loads	SSTU32864 – 14-bit 1:2 configuration 96-ball LFBGA 2 per DIMM	SSTU32866 – 14-bit 1:2 configuration 96-ball LFBGA 2 per DIMM/uncascaded parity

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY	LITERATURE REFERENCE
			LFBGA	
SN74SSTU32864	96	25-Bit Configurable Registered Buffers with SSTL_18 Inputs and Outputs	✓	SCES434
SN74SSTU32866	96	25-Bit Configurable Registered Buffers with Address-Parity Test	✓	SCES564

commercial package description and availability

DSBGA (die-size ball grid array)[†]

YEA, YZA = 5/6/8 pins
YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins
GKE, ZKE = 96 pins
GKF, ZKF = 114 pins

VFPGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins
GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now ✦ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins
N = 14/16/20/24 pins
NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins
DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89
DBV = SOT-23
DCY = SOT-223
DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins
RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)
PH = 80 pins (FIFOs only)
PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins
PAG = 64 pins (FB only)
PM = 64 pins
PN = 80 pins
PCA, PZ = 100 pins (FB only)
PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins
NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins
DB = 14/16/20/24/28/30/38 pins
DBQ = 16/20/24 pins
DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins
DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins
DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

SSTV/SSTVF

Stub Series-Terminated Low-Voltage Logic

The TI SSTV family is optimized for 2.5-V V_{CC} operation. The devices offered in this family are ideal solutions for address/control bus buffering in high-performance double-data-rate (DDR) memory systems. TI offers a variety of solutions for DDR registered dual inline memory module (RDIMM) applications. The SN74SSTV16857 is a 14-bit 1:1 register with low-power mode support designed for stacked DIMM applications. Two registers per DIMM are required when using these devices.

The SN74SSTV32852 combines the functionality of two SN74SSTV16859 devices to provide a cost-effective, single-chip solution for stacked applications. The SSTV family of devices is ideal for use in DDR200/266 applications. The SSTV family features SSTL_2 class-II drivers, which are ideal for terminated buses often used in motherboard applications.

To meet the needs for DDR333/400 registered DIMMs, TI was the first to release their SSTVF product line. As a faster version of the SSTV family, SSTVF devices feature SSTL_2 class-I outputs specifically designed for the unterminated DIMM load. This enables an increase in performance without sacrificing signal integrity. The result is a system with increased timing margins and better reliability. The SSTVF devices are available in all the popular SSTV functions used for planar and stacked DIMMs. All SSTVF devices are backward compatible with SSTV devices in registered DIMM applications. The CDCV857B differential clock complete the TI solution for DDR RDIMMs.

Please see the following table for the device that best fits your application:

DIMM CONFIGURATION	PC1600/PC2100 DDR200/266 1.7" DIMM	PC1600/PC2100 DDR200/266 1U DIMM	PC2700 DDR333 1U DIMM	PC3200 DDR400 1U DIMM
Planar 1 rank of x8 SDRAMs 9 loads	SSTV16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTV16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTVF16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTVF16859 – 13-bit 1:2 56-pin QFN 2 per DIMM
Planar double-sided 2 rank of x8 SDRAMs 18 loads	SSTV16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTV16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTVF16857 – 14-bit 1:1 48-pin TSSOP 2 per DIMM	SSTVF16859 – 13-bit 1:2 56-pin QFN 2 per DIMM
Stacked double-sided 2 rank of x4 SDRAMs 36 loads	SSTV16859 – 13-bit 1:2 64-pin TSSOP 2 per DIMM	SSTV32852 – 24-bit 1:2 114-ball LFBGA 1 per DIMM	SSTVF32852 – 24-bit 1:2 114-ball LFBGA 1 per DIMM	No solution
		SSTV16859 – 13-bit 1:2 56-pin QFN 2 per DIMM	SSTVF16859 – 13-bit 1:2 64-pin TSSOP/56-pin QFN 2 per DIMM	

**Migrate to SSTVF
for better signal integrity
and timing margins**

SSTV/SSTVF

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY				LITERATURE REFERENCE
			LFBGA	QFN	TSSOP	TVSOP	
SSTV							
SN74SSTV16857	48	14-Bit Registered Buffers with SSTL_2 Inputs and Outputs			✓	✓	SCES344
SN74SSTV16859	56/64	13-Bit to 26-Bit Registered Buffers with SSTL_2 Inputs and Outputs		✓ (56)	✓ (64)		SCES297
SN74SSTV32852	114	24-Bit to 48-Bit Registered Buffers with SSTL_2 Inputs and Outputs	✓				SCES361
SN74SSTV32867	96	26-Bit Registered Buffers with SSTL_2 Inputs and LVCMOS Outputs	✓				SCES362
SN74SSTV32877	96	26-Bit Registered Buffers with SSTL_2 Inputs and Outputs	✓				SCES378
SSTVF							
SN74SSTVF16857	48	14-Bit Registered Buffers with SSTL_2 Inputs and Outputs			✓	✓	SCES411
SN74SSTVF16859	56/64	13-Bit to 26-Bit Registered Buffers with SSTL_2 Inputs and Outputs		✓ (56)	✓ (64)		SCES429
SN74SSTVF32852	114	24-Bit to 48-Bit Registered Buffers with SSTL_2 Inputs and Outputs	✓				SCES426

commercial package description and availability

DSBGA (die-size ball grid array) [†] YEA, YZA = 5/6/8 pins YEP, YZP = 5/6/8 pins LFBGA (low-profile fine-pitch ball grid array) GGM = 80/100 pins GKE, ZKE = 96 pins GKF, ZKF = 114 pins VFBGA (very-thin-profile fine-pitch ball grid array) GQN, ZQN = 20 pins GQL, ZQL = 56 pins (also includes 48-pin functions)	PDIP (plastic dual-in-line package) P = 8 pins N = 14/16/20/24 pins NT = 24/28 pins PLCC (plastic leaded chip carrier) FN = 20/28/44/68/84 pins SOIC (small-outline integrated circuit) D = 8/14/16 pins DW = 16/18/20/24/28 pins SOT (small-outline transistor) PK = SOT-89 DBV = SOT-23 DCY = SOT-223 DCK = SC-70 QFN (quad flatpack no lead) RGY = 14/16/20 pins RGQ = 56 pins	QFP (quad flatpack) RC = 52 pins (FB only) PH = 80 pins (FIFOs only) PQ = 100/132 pins (FIFOs only) LQFP (low-profile quad flatpack) PZA = 80 pins TQFP (plastic thin quad flatpack) PAH = 52 pins PAG = 64 pins (FB only) PM = 64 pins PN = 80 pins PCA, PZ = 100 pins (FB only) PCB = 120 pins (FIFOs only) SOP (small-outline package) PS = 8 pins NS = 14/16/20/24 pins	QSOP (quarter-size small-outline package) DBQ = 16/20/24 pins SSOP (shrink small-outline package) DCT = 8 pins DB = 14/16/20/24/28/30/38 pins DBQ = 16/20/24 pins DL = 28/48/56 pins TSSOP (thin shrink small-outline package) PW = 8/14/16/20/24/28 pins DGG = 48/56/64 pins TVSOP (thin very small-outline package) DGV = 14/16/20/24/48/56 pins DBB = 80/100 pins VSSOP (very thin shrink small-outline package) DCU = 8 pins
---	--	--	---

schedule

✓ = Now ✦ = Planned

[†] JEDEC reference for wafer chip scale package (WCSP)

TTL

Transistor-Transistor Logic

With a wide array of functions, TI's TTL family continues to offer replacement alternatives for mature systems. This classic line of devices was at the cutting edge of performance when introduced, and it continues to deliver excellent value for many of today's designs. As the world leader in logic products, TI is committed to being the last major supplier at every price-performance node.

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

TTL

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			MIL	PDIP	SOIC	
SN7400	14	Quad 2-Input NAND Gates	✓	✓	✓	SDLS025
SN7402	14	Quad 2-Input NOR Gates	✓	✓		SDLS027
SN7404	14	Hex Inverters	✓	✓	✓	SDLS029
SN7405	14	Hex Inverters with Open-Collector Outputs		✓		SDLS030
SN7406	14	Hex Inverter Buffers/Drivers with Open-Collector Outputs	✓	✓	✓	SDLS031
SN7407	14	Hex Buffers/Drivers with Open-Collector Outputs	✓	✓	✓	SDLS032
SN7410	14	Triple 3-Input NAND Gates	✓	✓		SDLS035
SN7414	14	Hex Schmitt-Trigger Inverters	✓	✓	✓	SDLS049
SN7416	14	Hex Inverter Buffer/Drivers with Open-Collector Outputs	✓	✓	✓	SDLS031
SN7417	14	Hex Buffers/Drivers with Open-Collector Outputs	✓	✓	✓	SDLS032
SN7425	14	Dual 4-Input NOR Gates with Strobe	✓	✓		SDLS082
SN7432	14	Quad 2-Input OR Gates	✓	✓		SDLS100
SN7437	14	Quad 2-Input NAND Gates	✓	✓		SDLS103
SN7438	14	Quad 2-Input NAND Gates	✓	✓	✓	SDLS105
SN7445	16	BCD-to-Decimal Decoders/Drivers	✓	✓		SDLS110
SN7447A	16	BCD to 7-Segment Decoders/Drivers	✓	✓		SDLS111
SN7497	16	Synchronous 6-Bit Binary Rate Multipliers	✓	✓		SDLS130
SN74107	14	Dual Negative-Edge-Triggered J-K Flip-Flops with Reset	✓	✓		SDLS036
SN74121	14	Monostable Multivibrators with Schmitt-Trigger Inputs	✓	✓	✓	SDLS042
SN74123	16	Dual Retriggerable Monostable Multivibrators with Reset	✓	✓		SDLS043
SN74128	14	Hex OR-Gate Line Drivers	✓	✓	✓	SDLS045
SN74132	14	Quad 2-Input NAND Gates with Schmitt-Trigger Inputs	✓	✓		SDLS047
SN74145	16	BCD-to-Decimal Decoders/Drivers	✓	✓		SDLS051
SN74150	24	1-of-16 Data Selectors/Multiplexers	✓	✓		SDLS054
SN74154	24	4-to-16 Line Decoders/Demultiplexers	✓	✓		SDLS056
SN74159	24	4-to-16 Line Decoders/Demultiplexers with Open-Collector Outputs		✓		SDLS059
SN74175	16	Quad D-Type Flip-Flops with Clear	✓	✓		SDLS068
SN74193	16	Presetable Synchronous 4-Bit Up/Down Binary Counters	✓	✓		SDLS074
SN74221	16	Dual Monostable Multivibrators with Schmitt-Trigger Inputs	✓	✓		SDLS213
SN74276	20	Quad J-K Flip-Flops		✓	✓	SDLS091
SN74367A	16	Hex Buffers/Line Drivers with 3-State Outputs	✓	✓		SDLS102

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

† JEDEC reference for wafer chip scale package (WCSP)

DEVICE	NO. PINS	DESCRIPTION	AVAILABILITY			LITERATURE REFERENCE
			MIL	PDIP	SOIC	
SN74368A	16	Hex Inverting Buffers/Line Drivers with 3-State Outputs	✓	✓		SDLS102
SN74393	14	Dual 4-Bit Binary Counters	✓	✓		SDLS107

TVC

Translation Voltage Clamp Logic

TVC products are designed to protect components sensitive to high-state voltage-level overshoots.

New designs for PCs and other bus-oriented products require faster and lower-power devices built with advanced submicron semiconductor processes. Often, the I/Os of these devices are intolerant of high-state voltage levels on the communication buses used. The need for I/O protection became apparent for devices communicating with legacy buses, and the TVC family fills this need.

TVC devices offer an array of n-type metal-oxide semiconductor (NMOS) field-effect transistors (FETs), with the gates cascaded to a common gate input. TVC devices can be used as voltage limiters by connecting one of the FETs as a voltage reference transistor and the remainder as pass transistors. The low-voltage side of each pass transistor is limited to the voltage set by the reference transistor. All of the FETs in the array have essentially the same characteristics, so any one can be used as the reference transistor. Because the fabrication of the FETs is symmetrical, either port connection for each bit can be used as the low-voltage side, and the I/O signals are bidirectional through each FET.

Key features:

- No logic supply voltage required (no internal control logic)
- Used as voltage translators or voltage clamps
- 7- Ω on-state resistance with gate at 3.3 V
- Any FET can be used as the reference transistor.
- Direct interface with GTL+ levels
- Accept any I/O voltage from 0 to 5.5 V
- Flow-through pinout for ease of printed circuit board layout
- Minimum fabrication process transistor characteristic variations

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

TVC

DEVICE	NO. PINS	FUNCTION	AVAILABILITY					LITERATURE REFERENCE
			QSOP	SOIC	SSOP	TSSOP	TVSOP	
SN74TVC3010	24	10-Bit Translation Voltage Clamps	✓	✓		✓	✓	SCDS088
SN74TVC3306	8	Dual Voltage Clamps			✓			SCDS112
SN74TVC16222A	48	22-Bit Translation Voltage Clamps			✓	✓	✓	SCDS087

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins



VME

VERSAmodule Eurocard Bus Technology

TI introduces the SN74VMEH22501, which is specifically designed for VMEbus technology. The device is an 8-bit universal bus transceiver with two bus transceivers. The device provides incident-wave switching on the standard 21-slot VMEbus backplane, thus, producing data signaling rates of up to 40 Mbps – an 8× improvement over the VME64 standard.

SN74VMEH22501 features:

- Ability to transmit data on the VMEbus up to two-edge source synchronous transfer (2eSST) protocol speeds – an 8× improvement over the VME64 standard
- Incident-wave switching allows higher performance on the VMEbus, compared to conventional logic that depends on reflective wave switching.
- Backward compatibility to legacy VMEbus backplane

Target applications:

- Industrial controls
- Telecommunications
- Instrumentation systems

See www.ti.com/sc/logic for the most current data sheets.

DEVICE SELECTION GUIDE

VME

DEVICE	NO. PINS	FUNCTION	AVAILABILITY			LITERATURE REFERENCE
			TSSOP	TVSOP	VFBGA	
SN74VMEH22501	48/56	8-Bit Universal Bus Transceivers and Two 1-Bit Bus Transceivers with 3-State Outputs	✓	✓	✓	SCES357
SN74VMEH22501A	48/56	8-Bit Universal Bus Transceivers and Two 1-Bit Bus Transceivers with 3-State Outputs	✓	✓	✓	SCES620

commercial package description and availability

DSBGA (die-size ball grid array)†

YEA, YZA = 5/6/8 pins

YEP, YZP = 5/6/8 pins

LFBGA (low-profile fine-pitch ball grid array)

GGM = 80/100 pins

GKE, ZKE = 96 pins

GKF, ZKF = 114 pins

VFBGA (very-thin-profile fine-pitch ball grid array)

GQN, ZQN = 20 pins

GQL, ZQL = 56 pins (also includes 48-pin functions)

PDIP (plastic dual-in-line package)

P = 8 pins

N = 14/16/20/24 pins

NT = 24/28 pins

PLCC (plastic leaded chip carrier)

FN = 20/28/44/68/84 pins

SOIC (small-outline integrated circuit)

D = 8/14/16 pins

DW = 16/18/20/24/28 pins

SOT (small-outline transistor)

PK = SOT-89

DBV = SOT-23

DCY = SOT-223

DCK = SC-70

QFN (quad flatpack no lead)

RGY = 14/16/20 pins

RGQ = 56 pins

QFP (quad flatpack)

RC = 52 pins (FB only)

PH = 80 pins (FIFOs only)

PQ = 100/132 pins (FIFOs only)

LQFP (low-profile quad flatpack)

PZA = 80 pins

TQFP (plastic thin quad flatpack)

PAH = 52 pins

PAG = 64 pins (FB only)

PM = 64 pins

PN = 80 pins

PCA, PZ = 100 pins (FB only)

PCB = 120 pins (FIFOs only)

SOP (small-outline package)

PS = 8 pins

NS = 14/16/20/24 pins

QSOP (quarter-size small-outline package)

DBQ = 16/20/24 pins

SSOP (shrink small-outline package)

DCT = 8 pins

DB = 14/16/20/24/28/30/38 pins

DBQ = 16/20/24 pins

DL = 28/48/56 pins

TSSOP (thin shrink small-outline package)

PW = 8/14/16/20/24/28 pins

DGG = 48/56/64 pins

TVSOP (thin very small-outline package)

DGV = 14/16/20/24/48/56 pins

DBB = 80/100 pins

VSSOP (very thin shrink small-outline package)

DCU = 8 pins

schedule

✓ = Now + = Planned

† JEDEC reference for wafer chip scale package (WCSP)



LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

PACKAGING AND MARKING INFORMATION

A

APPENDIX A
PACKAGING AND MARKING INFORMATION

CONTENTS


Everything You Want to Know About Texas Instruments
 Lead (Pb)-Free Semiconductor Products A-5
Device Names and Package Designators for TI Logic Products A-7
Device Names and Package Designators
 for Logic Products Formerly Offered by Cypress Semiconductor A-8
Device Names and Package Designators
 for Logic Products Formerly Offered by Harris Semiconductor A-9
Logic Marking Guidelines A-11
Moisture Sensitivity by Package A-17
Packaging Cross-Reference A-19



Everything you want to know about **Texas Instruments** Lead (Pb)-Free Semiconductor products

— Texas Instruments (TI's) Definition of Lead(Pb)-Free

Pb-Free at TI means semiconductor products that are compatible with the current RoHS requirements for all six substances, including the requirement that lead not exceed 0.1% by weight in homogeneous material. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

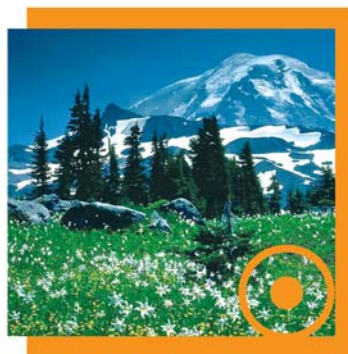

— TI's Key Information Resources

General Information:

www.ti.com/ecoinfo

Substance and Pb-Free schedule search tool:

www.ti.com/productcontent

Frequently Asked Questions:



www.ti.com/leadfree

Alternatively, you can contact your TI sales representative or an authorized TI distributor.

Or visit the worldwide Product Information Center:

support.ti.com



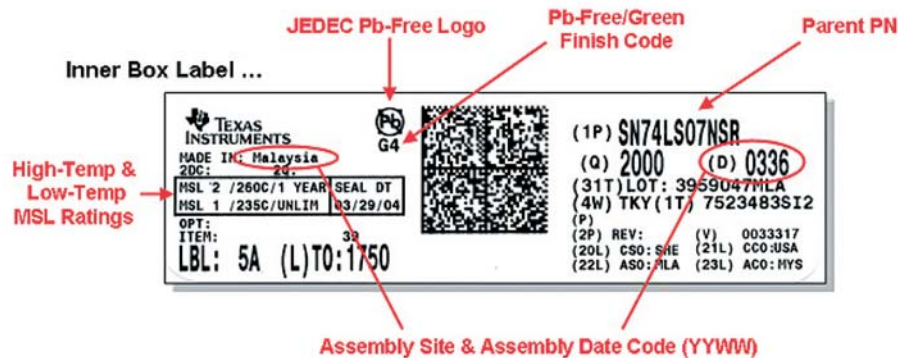

TI's Pb-Free Initiative (RoHS Compatibility)

TI is committed to delivering Pb-Free products (that comply with RoHS).

We follow an aggressive migration roadmap and have already converted the majority of our semiconductor portfolio to Pb-Free solutions.

TI's Proven Pb-Free Solutions

TI began removing lead (Pb) from semiconductor products more than a decade ago.

Nickel-palladium-gold (NiPdAu) is our primary Pb-Free finish for leadframes.

The industry generally recognizes this finish as the proven, reliable (whisker-free) solution of choice.

We offer one of the most comprehensive selections of semiconductor products with NiPdAu finish.

The solder balls in our Pb-Free array packages are based on the industry-standard tin-silver-copper (SnAgCu) process (lead solder ball versions will continue to be available).



DEVICE NAMES AND PACKAGE DESIGNATORS FOR TI LOGIC PRODUCTS

Example:

SN	74	LVC	H	16	2	244	A	DGG	R	E4
1	2	3	4	5	6	7	8	9	10	11

1 Standard Prefix

Examples: SN – Standard Prefix
SNJ – Conforms to MIL-PRF-38535 (QML)

2 Temperature Range

Examples: 54 – Military
74 – Commercial

3 Family

Examples: Blank = Transistor-Transistor Logic (TTL)
ABT – Advanced BiCMOS Technology
ABTE/ETL – Advanced BiCMOS Technology/
Enhanced Transceiver Logic
AC/ACT – Advanced CMOS Logic
AHC/AHCT – Advanced High-Speed CMOS Logic
ALB – Advanced Low-Voltage BiCMOS
ALS – Advanced Low-Power Schottky Logic
ALVC – Advanced Low-Voltage CMOS Technology
ALVT – Advanced Low-Voltage BiCMOS Technology
AS – Advanced Schottky Logic
AUC – Advanced Ultra-Low-Voltage CMOS Logic
AUP – Advanced Ultra-Low-Power CMOS Logic
AVC – Advanced Very Low-Voltage CMOS Logic
BCT – BiCMOS Bus-Interface Technology
CB3Q – 2.5-V/3.3-V Low-Voltage High-Bandwidth
Bus-Switch Crossbar Technology Logic
CB3T – 2.5-V/3.3-V Low-Voltage Translator
Bus-Switch Crossbar Technology Logic
CBT – Crossbar Technology
CBT-C – 5-V Bus-Switch Crossbar Technology Logic
With –2-V Undershoot Protection
CBTLV – Low-Voltage Crossbar Technology Logic
CD4000 – CMOS B-Series Integrated Circuits
F – F Logic
FB – Backplane Transceiver Logic/Futurebus+
FCT – Fast CMOS TTL Logic
GTL – Gunning Transceiver Logic
GTLP – Gunning Transceiver Logic Plus
HC/HCT – High-Speed CMOS Logic
HSTL – High-Speed Transceiver Logic
LS – Low-Power Schottky Logic
LV-A – Low-Voltage CMOS Technology
LV-AT – Low-Voltage CMOS Technology –
TTL Compatible
LVC – Low-Voltage CMOS Technology
LVT – Low-Voltage BiCMOS Technology
PCA/PCF – I²C Inter-Integrated Circuit Applications
S – Schottky Logic
SSTL – Stub Series-Terminated Logic
SSTU – Stub Series-Terminated
Ultra-Low-Voltage Logic
SSTV/SSTVF – Stub Series-Terminated
Low-Voltage Logic
TVC – Translation Voltage Clamp Logic
VME – VERSAmodule Eurocard Bus Technology

4 Special Features

Examples: Blank = No Special Features
C – Configurable V_{CC} (LVCC)
D – Level-Shifting Diode (CBTD)
H – Bus Hold (ALVCH)
K – Undershoot-Protection Circuitry (CBTK)
R – Damping Resistor on Both Output Ports (LVCR)
S – Schottky Clamping Diode (CBTS)
Z – Power-Up 3-State (LVCZ)

5 Bit Width

Examples: Blank = Gates, MSI, and Octals
1G – Single Gate
2G – Dual Gate
3G – Triple Gate
8 – Octal IEEE 1149.1 (JTAG)
16 – Widebus™ (16, 18, and 20 bit)
18 – Widebus IEEE 1149.1 (JTAG)
32 – Widebus+™ (32 and 36 bit)

6 Options

Examples: Blank = No Options
2 – Series Damping Resistor on One Output Port
4 – Level Shifter
25 – 25-Ω Line Driver

7 Function

Examples: 244 – Noninverting Buffer/Driver
374 – D-Type Flip-Flop
573 – D-Type Transparent Latch
640 – Inverting Transceiver

8 Device Revision

Examples: Blank = No Revision
Letter Designator A–Z

9 Packages

Commercial: D, DW – Small-Outline Integrated Circuit (SOIC)
DB, DBQ, DCT, DL – Shrink Small-Outline Package
(SSOP)
DBB, DGV – Thin Very Small-Outline Package (TVSOP)
DBQ – Quarter-Size Small-Outline Package (QSOP)
DBV, DCK, DCY, PK – Small-Outline Transistor (SOT)
DCU – Very Thin Shrink Small-Outline Package (VSSOP)
DGG, PW – Thin Shrink Small-Outline Package (TSSOP)
FN – Plastic Leaded Chip Carrier (PLCC)
GGM, GKE, GKF, ZKE, ZKF – MicroStar BGA™
Low-Profile Fine-Pitch Ball Grid Array (LFBGA)
GQL, GQN, ZQL, ZQN – MicroStar Jr.™
Very-Thin-Profile Fine-Pitch Ball Grid Array (VFBGA)
N, NT, P – Plastic Dual-In-Line Package (PDIP)
NS, PS – Small-Outline Package (SOP)
PAG, PAH, PCA, PCB, PM, PN, PZ – Thin Quad
Flatpack (TQFP)
PH, PQ, RC – Quad Flatpack (QFP)
PZA – Low-Profile Quad Flatpack (LQFP)
RGQ, RGY – Quad Flatpack No Lead (QFN)
YEA, YEP, YZA, YZP – NanoStar™ and NanoFree™
Die-Size Ball Grid Array (DSBGA†)
Military: FK – Leadless Ceramic Chip Carrier (LCCC)
GB – Ceramic Pin Grid Array (CPGA)
HFP, HS, HT, HV – Ceramic Quad Flatpack (CQFP)
J, JT – Ceramic Dual-In-Line Package (CDIP)
W, WA, WD – Ceramic Flatpack (CFP)

10 Tape and Reel

Devices in the DB and PW package types include the R designation for reeled product. Existing product inventory designated LE may remain, but all products are being converted to the R designation.

Examples: Old Nomenclature – SN74LVTxxxDBLE
New Nomenclature – SN74LVTxxxADBRR
R – Standard (valid for all surface-mount packages)
T – Small Quantity Reels (available in Little Logic only)

There is no functional difference between LE and R designated products, with respect to the carrier tape, cover tape, or reels used.

11 RoHS and Green Status


E – Conforms to JEDEC JESD97 E-Category specification for Pb-Free and reduced environmentally unfriendly substances
G – Additional reductions in environmentally unfriendly substances (Sb and Br) in addition to E₁ reductions

† DSBGA is the JEDEC reference for wafer chip scale package (WCSP).

DEVICE NAMES AND PACKAGE DESIGNATORS FOR LOGIC PRODUCTS FORMERLY OFFERED BY CYPRESS SEMICONDUCTOR

CYFCT Nomenclature

Example:

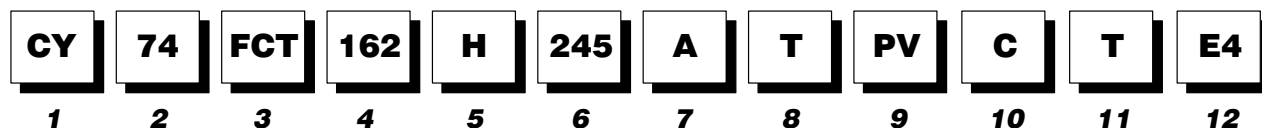

1 Prefix Designation for Acquired Cypress FCT Logic

May be blank to accommodate 18-character limitation

2 Temperature Range

Examples: 54 – Military (–55°C to 125°C)
74 – Commercial/Industrial (–40°C to 85°C)
29 – Commercial/Industrial or Military (see data sheet)

3 Family

Example: FCT – FAST™ CMOS TTL Logic

4 16 or Greater Bit Width With Balanced Drive or 3.3-V Operation

Examples: Blank
16x – 16 or Greater Bit Width
With Balanced Drive or 3.3-V Operation
162 – Balanced Drive (series output resistors)

5 Bus Hold

Examples: Blank = No Bus Hold
H – Bus Hold (present only when preceded by 16x
– see item 4)

6 Type Designation

Up to Five Digits

Examples: 245
1652
16245

7 Speed Grade

Examples: Blank = No Speed Grade
A
B
C
D
E

8 TTL or CMOS Outputs

Examples: Blank = CMOS Outputs
T – TTL Outputs

9 Packages

Examples: P – Plastic Dual-In-Line Package (PDIP) (N)
PA – Thin Shrink Small-Outline Package (TSSOP)
(DGG/G)
PV – Shrink Small-Outline Package (SSOP) (DL)
Q – Quarter-Size Outline Package (QSOP) (DBQ)
SO – Small-Outline Integrated Circuit (SOIC) (DL)

10 Processing

Example: C – Commercial Processing

11 Tape and Reel

Example: T – Tape-and-Reel Packing


12 RoHS and Green Status

E_ – Conforms to JEDEC JESD97 E-Category specification for
Pb-Free and reduced environmentally unfriendly substances
G_ – Additional reductions in environmentally unfriendly
substances (Sb and Br) in addition to E_ reductions

DEVICE NAMES AND PACKAGE DESIGNATORS FOR LOGIC PRODUCTS FORMERLY OFFERED BY HARRIS SEMICONDUCTOR

CD4000 Nomenclature

Example

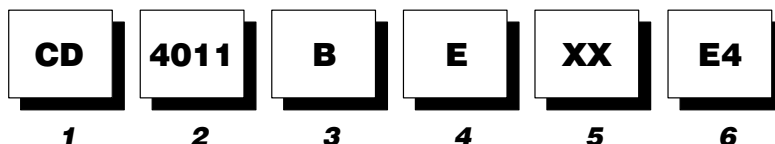

1 Prefix Designation
for Acquired Harris Digital Logic

2 Type Designation

Up to Five Digits

3 Supply Voltage

Examples: A – 12 V Maximum
B – 18 V Maximum
UB – 18 V Maximum, Unbuffered

4 Packages

Examples: D – Ceramic Side-Brazed Dual-In-Line Package (DIP)
E – Plastic DIP
F – Ceramic DIP
K – Ceramic Flatpack
M – Plastic Surface-Mount
Small-Outline Integrated Circuit (SOIC)
SM – Plastic Shrink SOIC (SSOP)
M96 – Reeled Plastic Surface-Mount SOIC
SM96 – Reeled Plastic Shrink SOIC (SSOP)

5 High-Reliability Screening

Military Products Only


Examples: 3 – Noncompliant With MIL-STD-883, Class B
3A – Fully Compliant With MIL-STD-883, Class B

6 RoHS and Green Status

E₋ – Conforms to JEDEC JESD97 E-Category specification for Pb-Free and reduced environmentally unfriendly substances
G₋ – Additional reductions in environmentally unfriendly substances (Sb and Br) in addition to E₋ reductions

CDAC/CDACT Advanced CMOS and CDHC/CDHCT/CDHCU High-Speed CMOS Nomenclature

Example

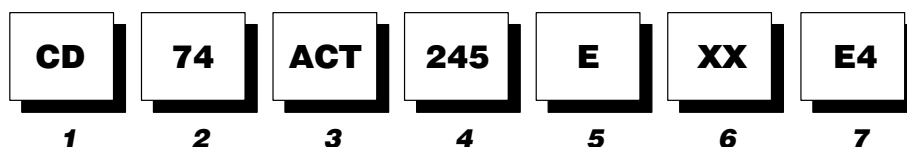

1 Prefix Designation
for Acquired Harris Digital Logic

2 Temperature Range

Examples: 54 – Military (–55°C to 125°C)
74 – Commercial (0°C to 70°C)

3 Family

Examples: AC – Advanced CMOS Logic, CMOS Input Levels
ACT – Advanced CMOS Logic, TTL Input Levels
HC – High-Speed CMOS Logic, CMOS Input Levels
HCT – High-Speed CMOS Logic, TTL Input Levels
HCU – High-Speed CMOS Logic, CMOS Input Levels, Unbuffered

4 Type Designation

Up to Five Digits

5 Packages

Examples: E – Plastic Dual-In-Line Package (DIP)
EN – Plastic Slim-Line 24-Lead DIP
F – Ceramic DIP
M – Plastic Surface-Mount
Small-Outline Integrated Circuit (SOIC)
SM – Plastic Shrink SOIC (SSOP)
M96 – Reeled Plastic Surface-Mount SOIC
SM96 – Reeled Plastic Shrink SOIC (SSOP)

6 High-Reliability Screening

Military Products Only

Example: 3A – Fully Compliant With MIL-STD-883


7 RoHS and Green Status

E₋ – Conforms to JEDEC JESD97 E-Category specification for Pb-Free and reduced environmentally unfriendly substances
G₋ – Additional reductions in environmentally unfriendly substances (Sb and Br) in addition to E₋ reductions

DEVICE NAMES AND PACKAGE DESIGNATORS FOR LOGIC PRODUCTS FORMERLY OFFERED BY HARRIS SEMICONDUCTOR

CDFCT Nomenclature

Example

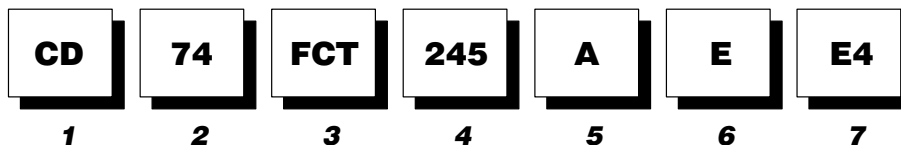

1 Prefix Designation for Acquired Harris Digital Logic

2 Temperature Range

Examples: 54 – Military (–55°C to 125°C)
74 – Commercial (0°C to 70°C)

3 Family

Example: FCT – Bus Interface, TTL Input Levels

4 Type Designation

Up to Five Digits

5 Speed Grade

Example: Blank or A – Standard Equivalent to FAST™

6 Packages

Examples: E – Plastic Dual-In-Line Package (DIP)
EN – Plastic Slim-Line 24-Lead DIP
F – Ceramic DIP
M – Plastic Surface-Mount
Small-Outline Integrated Circuit (SOIC)
SM – Plastic Shrink SOIC (SSOP)
M96 – Reeled Plastic Surface-Mount SOIC
SM96 – Reeled Plastic Shrink SOIC (SSOP)

7 RoHS and Green Status

E_ – Conforms to JEDEC JESD97 E-Category specification for Pb-Free and reduced environmentally unfriendly substances
G_ – Additional reductions in environmentally unfriendly substances (Sb and Br) in addition to E_ reductions

LOGIC MARKING GUIDELINES

In the past, logic products had the complete device name on the package. It has become necessary to reduce the character count, as package types have become smaller and logic names longer. Information in the following tables is intended to help interpret TI's logic symbolization.

Table A-1 defines a "name rule" (A, B, or C) based on the type of package for a specific device. Each name rule differs in the number of characters that are symbolized on the package. Name rule A uses the complete, or fully qualified, device name. Name rules B and C include fewer characters, respectively. Table A-2 is a listing of the various logic products by name rule.

Example: Assume a 48-pin TVSOP with the symbolization VH***. Locate the 48-pin TVSOP (DGV) package in Table A-1, and find the name rule used (C). Proceed to Table A-2, and find VH*** in the *Name Rule C* column. The most complete device number, SN74ALVCH16***, is located in the *Name Rule A* column.

See the following information and Tables A-3 and A-4 for Little Logic (PicoGate Logic, Microgate Logic, and NanoStar™) packages.

LOGIC MARKING GUIDELINES

Table A-1. Name-Rule Decision Tree

PACKAGE	NO. PINS	NAME RULE	PACKAGE DESIGNATOR
LFBGA	96	C	GKE
	114	C	GKF
PDIP	8	A	P
	14, 16, 20	A	N
	24, 28	A	NP, NT
PLCC	28	A	FN
	44	B	FN
	68	A	FN
QSOP	16, 20, 24	B	DBQ
SOIC	8	C	D
	14, 16	B	D
	16, 20, 24, 28	B	DW
QFN	14, 16, 20	C	RGY
	56	C	RGQ
QFP	52	B	RC
	80	A	PH
	100, 132	A	PQ
SOP	8	C	PS
	14, 16, 20, 24	B	NS
SSOP	14, 16, 20, 24, 28, 30, 38	C	DB
	16, 20, 24	B	DBQ
	28, 48, 56	B	DL
TSSOP	8, 14, 16, 20, 24, 28	C	PW
	48, 56, 64	B	DGG
TVSOP	14, 16, 20, 24, 48, 56	C	DGV
	80	B	DBB
TQFP	52	B	PAH
	64	B	PAG, PM
	80	B	PN
	100	B	PZ, PCA
	120	B	PCB
VFBGA	56	C	GQL

LOGIC MARKING GUIDELINES

Table A-2. Typical Logic Package Symbolization Guidelines

NAME RULE A	NAME RULE B	NAME RULE C
74AC***	AC***	AC***
74AC11***	AC11***	AE***
74ACT***	ACT***	AD***
74ACT1***	ACT1***	AU***
74ACT11***	ACT11***	AT***
CD4***	CD4***	CM***
CD4***	CD4***M†	CM***
CD74AC***	AC***M	HL***
CD74AC40	AC40***M	HY***
CD74ACT***	ACT***M	HM***
CD74ACT40***	ACT40***M	HZ***
CD74FCT***	74FCT***M	FC***
CD74FCT***	74FCT***M	FCT***SM‡
CD74HC***	HC***M	HJ***
CD74HC40***	HC40***M	HP***
CD74HCT***	HCT***M	HK***
CD74HCT40***	HCT40***M	HR***
CY29FCT***	29FCT***	FY***_§
CY74FCT***	FCT***	FT***_§
CY74FCT16***	FCT16***	FD***§
CY74FCT2***	FCT2***	FR***_§
PCF8***	PCF8***	PF***
SN64BCT***	DCT***	DT***
SN64BCT2***	DCT2***	DA***
SN64BCT25***	DCT25***	DC***
SN64BCT29***	DCT29***	DD***
SN74ABT***	ABT***	AB***
SN74ABT***-S	ABT***-S	AB***-S
SN74ABT16***	ABT16***	AH***
SN74ABT162***	ABT162***	AH2***
SN74ABT18***	ABT18***	AJ***
SN74ABT2***	ABT2***	AA***
SN74ABT5***	ABT5***	AF***
SN74ABT8***	ABT8***	AG***
SN74ABTE16***	ABTE16***	AN***
SN74ABTH***	ABTH***	AK***
SN74ABTH16***	ABTH16***	AM***
SN74ABTH162***	ABTH162***	AM2***
SN74ABTH18***	ABTH18***	AL***
SN74ABTR2***	ABTR2***	AR***
SN74AHC***	AHC***	HA***

† For SOIC D and DW packages only

‡ For DB package only

§ Speedcode

¶ For NS package only

NAME RULE A	NAME RULE B	NAME RULE C
SN74AHC16***	AHC16***	HE***
SN74AHCH16***	AHCH16***	HH***
SN74AHCT***	AHCT***	HB***
SN74AHCT16***	AHCT16***	HE***
SN74AHCTH16***	AHCTH16***	HG***
SN74AHCJ***	AHCJ***	HD***
SN74ALB16***	ALB16***	AV***
SN74ALS***	ALS***	G***
SN74ALVC***	ALVC***	VA***
SN74ALVC16***	ALVC16***	VC***
SN74ALVC162***	ALVC162***	VC2***
SN74ALVCH***	ALVCH***	VB***
SN74ALVCH16***	ALVCH16***	VH***
SN74ALVCH162***	ALVCH162***	VH2***
SN74ALVCH32***	ALVCH32***	ACH***
SN74ALVCHG16***	ALVCHG16***	VG***
SN74ALVCHG162***	ALVCHG162***	VG2***
SN74ALVCHR16***	ALVCHR16***	VR***
SN74ALVCHR162***	ALVCHR162***	VR2***
SN74ALVCHS162***	ALVCHS162***	VS2***
SN74ALVTH16***	ALVTH16***	VT***
SN74ALVTH162***	ALVTH162***	VT2***
SN74ALVTH32***	ALVTH32***	VL***
SN74AS***	AS***	AS***
SN74AS***	74AS***¶	AS***
SN74AVC***	AVC***	AVC***
SN74AVC16***	AVC16***	CVA***
SN74AVC32***	AVC32***	ACV***
SN74AVCC16***	AVCC16***	AW***
SN74AVCH16***	AVCH16***	CVH***
SN74BCT***	BCT***	BT***
SN74BCT11***	BCT11***	BB***
SN74BCT2***	BCT2***	BA***
SN74BCT25***	BCT25***	BC***
SN74BCT29***	BCT29***	BD***
SN74BCT8***	BCT8***	BG***
SN74CBT***	CBT***	CT***
SN74CBT16***	CBT16***	CY***
SN74CBT3***	CBT3***	CU***
SN74CBT6***	CBT6***	CT6***
SN74CBTD***	CBTD***	CD***

LOGIC MARKING GUIDELINES

Table A-2. Typical Logic Package Symbolization Guidelines (continued)

NAME RULE A	NAME RULE B	NAME RULE C
SN74CBTD16***	CBTD16***	CYD***
SN74CBTD3***	CBTD3***	CC***
SN74CBTH16***	CBTH16***	CYH***
SN74CBTK***	CBTK***	BK***
SN74CBTK16***	CBTK16***	CP***
SN74CBTK32***	CBTK32***	KT***
SN74CBTLV16***	CBTLV16***	CN***
SN74CBTLV3***	CBTLV3***	CL***
SN74CBTR16***	CBTR16***	CZ***
SN74CBTS***	CBTS***	CS***
SN74CBTS16***	CBTS16***	CYS***
SN74CBTS3***	CBTS3***	CR***
SN74F***	F***	F***
SN74F***	74F***†	F***
SN74GTLP***	GTLP***	GT***
SN74GTLP1***	GTLP1***	GP***
SN74GTLPH***	GTLPH***	GH***
SN74GTLPH16***	GTLPH16***	GL***
SN74GTLPH32***	GTLPH32***	GM***
SN74HC***	HC***	HC***
SN74HCT***	HCT***	HT***
SN74HCU***	HCU***	HU***
SN74LS***	LS***	LS***
SN74LS***	74LS***†	LS***
SN74LV***	LV***	LV***
SN74LV***	74LV***†	LV***
SN74LVC***	LVC***	LC***
SN74LVC16***	LVC16***	LD***
SN74LVC2***	LVC2***	LE***
SN74LVC32***	LVC32***	NC***
SN74LVC4***	LVC4***	LJ***
SN74LVC8***	LVC8***	LC8***

NAME RULE A	NAME RULE B	NAME RULE C
SN74LVCC3***	LVCC3***	LH***
SN74LVCC4***	LVCC4***	LG***
SN74LVCH***	LVCH***	LCH***
SN74LVCH16***	LVCH16***	LDH***
SN74LVCH162***	LVCH162***	LN2***
SN74LVCH32***	LVCH32***	CH***
SN74LVCHR162***	LVCHR162***	LR2***
SN74LVCR2***	LVCR2***	LER***
SN74LVCU***	LVCU***	LCU***
SN74LVZ***	LVZ***	CV***
SN74LVZ16***	LVZ16***	CW***
SN74LVT***	LVT***	LX***
SN74LVT***-S	LVT***-S	LX***-S
SN74LVT162***	LVT162***	LZ***
SN74LVT18***	LVT18***	T18***
SN74LVT2***	LVT2***	LY***
SN74LVT32***	LVT32***	VJ***
SN74LVTH***	LVTH***	LXH***
SN74LVTH16***	LVTH16***	LL***
SN74LVTH162***	LVTH162***	LL2***
SN74LVTH2***	LVTH2***	LK***
SN74LVTH32***	LVTH32***	HV***
SN74LVTR***	LVTR***	LXR***
SN74LVTT***	LVTT***	LXT***
SN74LVTZ***	LVTZ***	LXZ***
SN74LVU***	LVU***	LU***
SN74S***	S***	S***
SN74S***	74S***†	S***
SN74SSTV16***	SSTV16***	SS***
SN74TVC16***	TVC16***	TW***
SN74TVC3***	TVC3***	TT***

† For SOIC D and DW packages only

‡ For DB package only

§ Speedcode

¶ For NS package only

Little Logic Packages

TI Little Logic devices are available in several small pin-count package options. Leadframe devices are offered in 5-pin SOT-23 (DBV), 5-pin SC-70 (DCK), 6-pin SOT-23 (DBV), 6-pin SC-70 (DCK), 8-pin SM-8 (DCT), and 8-pin US-8 (DCU). Wafer chip scale packaging (WCSP) is available with TI NanoStar™ (YEA) and NanoFree™ (YZA) packages in 5-, 6-, and 8-ball solder bump configurations.

Tables A-3 and A-4 list the possible device technology and function codes for the 5-pin packages. In some cases, the tables may list a device technology or function that is not yet available. The wafer fabrication and assembly-test site is coded into the final character for both packages. Additional tracking information is coded into “dots” or marks adjacent to the device pins. For further information about a specific device, please contact your local field sales office or the TI Product Information Center.

PicoGate Logic

PicoGate Logic uses a three-character name rule. The first character denotes the technology family, the second character denotes device function, and the third character denotes a wafer fabrication and assembly-test facility combination (for internal tracking, here denoted by x).

Example: A PicoGate Logic device with a package code of BAx is an SN74AHCT1G00DBV.

Microgate Logic

Microgate Logic uses a four-character name rule. The first character denotes the technology family, the second and third characters denote device function, and the fourth character denotes a wafer fabrication and assembly-test facility combination (for internal tracking, here denoted by x).

Example: A Microgate Logic device with a package code of A02x is an SN74AHC1G02DCK.

NanoStar™ Package

The NanoStar package uses a three-character name rule. The first character denotes the technology family, the second character denotes device function, and the third character denotes a wafer fabrication and assembly-test facility combination (for internal tracking, here denoted by x).

Note: On NanoStar packages, the three-character device name is preceded by three additional characters denoting year (Y), month (M), and sequence code (L).

Example: A NanoStar package logic device with a package code of YMLCAx is an SN74LVC1G00YEA.

LOGIC MARKING GUIDELINES

Table A-3. Device Technology Codes

TECHNOLOGY	CODE
AHC	A
AHCT	B
AUC	U
AUP	H
CB3Q	G
CB3T	W
CBT	S
CBTD	P
CBTLV	V
LVC	C

Table A-4. Device Function Codes

FUNCTION	DCK/ YEA/ YZA	DBV/ DCT/ DCU
00	A	00
02	B	02
04	C	04
05	5	05
06	T	06
07	V	07
08	E	08
125	M	25
125C		C2
126	N	26
132	Y	3B
14	F	14
157		57
17	7	17
18	J	18
240	K	40
241		41
245		45
257		B7
32	G	32
34		34
384	8	8D
53		53
57		A7
58		58
66	6	66
74		74
79	R	79
80	X	80
86	H	86
97		97
98		98
U04	D	U4

MOISTURE SENSITIVITY BY PACKAGE

Table A-5 lists the moisture sensitivity of TI packages by level. Some packages differ in level by pin count.

Table A-5. Package Moisture Sensitivity by Levels

PACKAGE	LEVEL 1	LEVEL 2	LEVEL 2A	LEVEL 3	LEVEL 4
PLCC	FN (20/28)			FN (44/68)	
SOT	DBV (5) DCK (5)				
SOP		NS (14/16/20) [†] PS (8) [†]			
SOIC		D (8/14/16) [†] DW (16/20/24/28) [†]			
SSOP	DCT (8) DL (28/48/56)	DB (14/16/20/24/28/30/38) [†] DBQ (16/20/24) [†]			
QSOP		DBQ (16/20/24) [†]			
TSSOP	DGG (48/56/64) [†] PW (8/14/16/20/24) [†]				
TVSOP	DBB (80) [†] DGV (14/16/20/24/48/56) [†]				
VSSOP	DCU (8)				
QFN		RGY (14/16/20) [†]			
QFP		RC (52)			
TQFP		PAG (64) PCA (100) PN (80) PZ (100)			PM (64)
MicroStar BGA				GKE (96) GKF (114)	
MicroStar Jr. BGA			GQL (56)		
NanoStar	YEA (5/8)				

[†] Meets 250°C

- NOTES:
1. No current device packages are moisture-sensitivity levels 5 or 6.
 2. Some device types in these packages may have different moisture-sensitivity levels than shown.
 3. All levels except level 1 are dry packed.

TI's through-hole packages (N, NT) have not been tested per the JESD22-A112A/JESD22-A113A standards. Due to the nature of the through-hole PCB soldering process, the component package is shielded from the solder wave by the PC board and is not subjected to the higher reflow temperatures experienced by surface-mount components.

TI's through-hole component packages are classified as not moisture sensitive.

MOISTURE SENSITIVITY BY PACKAGE

The information in Table A-6 was derived using the test procedures in JESD22-A112A and JESD22-A113A. The *Floor Life* column lists the time that products can be exposed to the open air while in inventory or on the manufacturing floor. The worst-case environmental conditions are given. The *Soak Requirements* column lists the preconditioning, or soak, conditions used when testing to determine the floor-life exposure time.

**Table A-6. Moisture-Sensitivity Levels
(JESD22-A112A/JESD22-A113A)**

LEVEL	FLOOR LIFE		SOAK REQUIREMENTS	
	CONDITIONS	TIME (hours)	CONDITIONS	TIME (hours)
1	≤ 30°C/90% RH	Unlimited	85°C/85% RH	168
2	≤ 30°C/60% RH	1 year	85°C/60% RH	168
2A	≤ 30°C/60% RH	4 weeks	30°C/60% RH	696
				X + Y = Z[†]
3	≤ 30°C/60% RH	168	30°C/60% RH	24 + 168 = 192
4	≤ 30°C/60% RH	72	30°C/60% RH	24 + 72 = 96
5	≤ 30°C/60% RH	24	30°C/60% RH	24 + 24 = 48
6	≤ 30°C/60% RH	6	30°C/60% RH	0 + 6 = 6

RH = Relative humidity

[†] X + Y = Z, where:

X = Default value of time between bake and bag. If the actual time exceeds this value, use the actual time and adjust the soak time (Z). For levels 3–6, X can be standardized at 24 hours as long as the actual time does not exceed this value.

Y = Floor life of package after it is removed from dry-pack bag

Z = Total soak time for the evaluation

For more information, see:

Packaging Material Standards for Moisture-Sensitive Items, EIA Std EIA-583

Symbol and Labels for Moisture-Sensitive Devices, EIA/JEDEC Engineering Publication EIA/JEP113-B, May 1999

Guidelines for the Packing, Handling, and Repacking of Moisture-Sensitive Components, EIA/JEDEC Publication EIA/JEP124, December 1995

Table A-7 is a packaging cross-reference for TI and other semiconductor manufacturing companies. If a specific alternate source agreement exists between TI and a particular company, the cell is shaded.

Table A-7. Logic Package Competitive Cross-Reference

PACKAGE TYPE	NO. PINS	TI	TI-ACQUIRED HARRIS	TI-ACQUIRED CYPRESS	FAIRCHILD	IDT	IDT-ACQUIRED QUALITY	ON (formerly Motorola)	PERICOM	PHILIPS	RENESAS	ST MICRO	TOSHIBA
DSBGA†	5	YEA‡	—	—	MicroPak™	—	—	—	—	—	—	—	—
	8	YEA‡	—	—	MicroPak™	—	—	—	—	—	—	—	—
LFBGA	96	GKE‡	—	—	G	BF	—	—	—	EC	—	—	—
	114	GKF‡	—	—	—	BF	—	—	NB	EC	—	—	—
PDIP	8	P	E	P	N, P, PC	P	P	P, N	P	N	—	EY	P
	14	N	E	P	N, P, PC	P	P	P, N	P	N	—	B, B1R, EY	P
	16	N	E	P	P, PC	P	—	P, N	P	N	—	B, B1R, EY	P
	20	N	E	P	P, PC	P	—	P, N	P	N	—	B, B1R, EY	P
	24	NT	EN	P	NT, SP	PT	P	N	P	N2	—	B, B1R, EY	P
	28	NT	—	P	—	PT	—	—	P	—	—	—	—
QSOP	16	DBQ	—	Q	—	Q	Q	—	—	—	—	—	—
	20	DBQ	—	Q	—	Q	Q	—	Q	—	—	—	—
	24	DBQ	—	Q	—	Q	Q	—	—	—	—	—	—
SOIC	14	D	M	SO	M, S, SC	DC	S1	D	W	D	RP	M/MTR, M1R/RM13TR, M1/M013TR	FN
	16	D	D, M	SO	M, S, SC	DC	S1	D	W	D	RP	M/MTR, M1R/RM13TR, M1/M013TR	FN
	16	DW	DW, M	SO	—	SO	S0	DW	S	—	—	M/MTR, M1R/RM13TR, M1/M013TR	—
	20	DW	M	SO	WM, SC	SO	S0	DW	S	DW	RP	M/MTR, M1R/RM13TR, M1/M013TR	FW
	24	DW	M	SO	WM, SC	SO	S0	DW	S	DW	RP	M/MTR, M1R/RM13TR, M1/M013TR	—
	28	DW	—	SO	—	SO	S0	—	S	DW	RP	—	—
SOP	14	NS	—	—	SJ	—	—	F, M(EL)	—	—	FP	—	—
	16	NS	—	—	SJ	—	—	F, M(EL)	—	—	FP	—	—
	20	NS	—	—	SJ	—	—	F, M(EL)	—	—	FP	—	—

LEGEND:




TI and this company have an alternate source agreement.

MicroPak is a trademark of Fairchild Semiconductor Corporation.

Table A-7. Logic Package Competitive Cross-Reference (continued)

PACKAGE TYPE	NO. PINS	TI	TI-ACQUIRED HARRIS	TI-ACQUIRED CYPRESS	FAIRCHILD	IDT	IDT-ACQUIRED QUALITY	ON (formerly Motorola)	PERICOM	PHILIPS	RENESAS	ST MICRO	TOSHIBA
SSOP	14	DB	—	—	—	—	—	SD	H	DB	—	—	—
	16	DB	SM	—	—	—	—	SD	H	DB	—	—	—
	16	DBQ	—	Q	—	Q	Q	—	Q	—	—	—	—
	20	DB	SM	—	MSA	PY	—	SD	H	DB	—	—	—
	20	DBQ	—	Q	QSC	Q	Q	—	Q	—	—	—	—
	24	DB	SM	—	MSA	PY	—	SD	H	DB	—	—	—
	24	DBQ	—	Q	—	Q	Q	—	Q	—	—	—	—
	28	DB	—	—	—	PY	—	—	H	DB	—	—	—
	30	DB	—	—	—	—	—	—	—	—	—	—	—
	38	DB	—	—	—	—	—	—	—	—	—	—	—
	28	DL	—	—	—	—	—	—	—	—	—	—	—
	48	DL	—	PV	MEA/SSC	PV	PV	—	V	DL	—	—	—
	56	DL	—	PV	MEA/SSC	PV	PV	—	V	DL	—	—	—
TSSOP	14	PW	—	—	MTC	—	—	DT	L	PW/DH	TTP	TTR	FS, FT
	16	PW	—	—	MTC	—	—	DT	L	PW/DH	TTP	TTR	FS, FT
	20	PW	—	—	MTC	PG	—	DT	L	PW/DH	TTP	TTR	FS, FT
	24	PW	—	—	MTC	PG	PA	DT	L	PW/DH	TTP	TTR	—
	28	PW	—	—	—	PG	—	—	L	—	TTP	TTR	—
	48	DGG	—	PA	MTD	PA	PA	DT	A	DGG	TTP	TTR	FT
	56	DGG	—	PA	MTD	PA	PA	DT	A	DGG	TTP	TTR	FT
	64	DGG	—	—	—	—	—	—	—	—	TTP	TTR	—
TVSOP	14	DGV	—	—	—	—	—	—	—	DGV	—	—	—
	16	DGV	—	—	—	—	—	—	—	—	—	—	—
	20	DGV	—	—	—	—	—	—	—	—	—	—	—
	24	DGV	—	—	—	—	—	—	—	—	—	—	—
	48	DGV	—	—	—	PF	Q1 [§]	—	K [¶]	—	—	—	—
	56	DGV	—	—	—	PF	—	—	K6	—	—	—	—
	80	DBB	—	—	—	—	—	—	—	—	TTP	—	—

LEGEND:



TI and this company have an alternate source agreement.

Table A-7. Logic Package Competitive Cross-Reference (continued)

PACKAGE TYPE	NO. PINS	TI	TI-ACQUIRED HARRIS	TI-ACQUIRED CYPRESS	FAIRCHILD	IDT	IDT-ACQUIRED QUALITY	ON (formerly Motorola)	PERICOM	PHILIPS	RENESAS	ST MICRO	TOSHIBA
VFBGA	20	GQN [†]	—	—	—	—	—	—	—	—	—	—	—
	56	GQL [‡]	—	—	—	—	—	—	—	—	—	—	—
Single Gate	5	DBV	—	—	P5	—	—	—	—	GV	—	STR	F
	5	DCK	—	—	M5	—	—	DF	—	GW	CM(E)	CTR	FU
Dual Gate	8	DCT	—	—	—	—	—	—	—	—	—	—	FU
	8	DCU	—	—	K8	—	—	—	—	—	US(E)	CTR	FK
Triple Gate	8	DCT	—	—	—	—	—	—	—	—	—	—	FU
	8	DCU	—	—	K8	—	—	—	—	—	US(E)	—	FK

[†] DSBGA is the JEDEC reference for wafer chip scale package (WCSP).

[‡] Also available in lead free (YZA)

[§] Quality Semiconductor's QVSOP package has the same pitch but slightly different footprint than the TI TVSOP package.


[¶] Pericom has a QVSOP with similar specifications and lead pitch to the TI TVSOP package.

[#] Tape-and-reel packaging is valid for surface-mount packages only. All orders must be for whole reels.

^{||} LE = Left-embossed tape and reel may be seen with some DB and PW packages, however, the nomenclature is transitioning to R.

^{*} R = Standard tape and reel (required for DBB, DBV, and DGG; optional for D, DL, and DW packages)

LEGEND:

 TI and this company have an alternate source agreement.

PACKAGING CROSS-REFERENCE

Logic Devices

Tables A-8 through A-11 list the standard pack quantities, by package type, for tubes, reels, boxes, and trays, respectively.

Table A-8. Tube Quantities

	PIN COUNT									
	8	14	16	20	24	28	44	48	56	68
DIP	50	25	25	20	15	13	N/A	N/A	N/A	N/A
PLCC	N/A	N/A	N/A	46	N/A	37	26	N/A	N/A	18
SOIC	75	50	40	25	25	20	N/A	N/A	N/A	N/A
SSOP	N/A	N/A	NS	N/A	N/A	40	N/A	25	20	N/A

NOTE 1: QSOP (DBQ) and EIAJ devices (DB, NS, PS, and PW packages) are not available in tubes.

Table A-9. Reel Quantities

		PACKAGE DESIGNATOR	UNITS PER REEL
DSBGA [†]	96/114 pin	YEAR [‡]	3000
EIAJ surface mount		DBR/DBLE, NSR/NSLE, PWR/PWLE	2000
LFBGA	96/114 pin	GKE [‡] , GKF [‡]	1000
PLCC	20 pin	FNR	1000
	28 pin	FNR	750
	44 pin	FNR	500
QFN	14/16/20 pin	RGY	1000
	56 pin	RGQ	2000
QSOP	16/20/24 pin	DBQR	2500
SSOP	48/56 pin	DLR	1000
SOIC/SOP	14/16 pin	DR	2500
	Widebody 16 pin	DWR	2000
	20/24 pin	DWR	2000
	28 pin	DWR	1000
TQFP	64 pin	PMR	1000
TSSOP		DGGR	2000
VFBGA	20/56 pin	GQN [‡] , GQL [‡]	1000

[†] DSBGA is the JEDEC reference for wafer chip scale package (WCSP).

[‡] Also available in lead free

PACKAGING CROSS-REFERENCE

Table A-10. Box Quantities

		PACKAGE DESIGNATOR	UNITS PER BOX
DIP		N	1000
		NT	750
		NP	700
SOIC		D, DW	1000
SSOP	48/56 pin	DL	1000

Table A-11. Tray Quantities

		PACKAGE DESIGNATOR	UNITS PER TRAY
TQFP	64 pin	PM	160

LOGIC OVERVIEW	1
MUST-HAVE PRODUCTS	2
PRODUCT INDEX	3
FUNCTIONAL CROSS-REFERENCE	4
DEVICE SELECTION GUIDE	5
PACKAGING AND MARKING INFORMATION	A
LOGIC PURCHASING TOOL/ALTERNATE SOURCES	B

LOGIC PURCHASING TOOL/ALTERNATE SOURCES



LOGIC PURCHASING TOOL/ALTERNATE SOURCES


Tables B-1 through B-4 list equivalent or similar product types for most logic families available in the industry, separated by voltage node and specialty logic. As the world leader in logic products, TI offers the broadest logic portfolio to meet your design needs.


Alternate sourcing agreements between TI and other companies are shown with shaded table cells. Crosshatched cells are used where the products are identical (or nearly identical). Cells with no background are used where the products are similar.


Table B-1. 5-V Logic

TI	FAIRCHILD	HITACHI	IDT	ON	PERICOM	PHILIPS	TOSHIBA
ABT	ABT	ABT				ABT	ABT
AC	AC	AC		AC			AC
ACT	ACT	ACT		ACT			ACT
AHC	VHC			VHC		AHC	
AHCT	VHCT			VHCT		AHCT	
AHC1G	NC7S					HC1G	7SHU
AHCT1G	NC7ST						
ALS	ALS					ALS	
AS	AS						
BCT							BC
CBT	FST		FST, QS		PI5C		
CD4000	CD4000			MC14000			
F	F					F	
FCT			FCT		FCT		
HC	HC	HC		HC		HC	HC
HCT	HCT	HCT		HCT		HCT	HCT
LS							
S							
TTL							

LEGEND:

 TI and this company have an alternate source agreement.

 Same product but no alternate source agreement

 Similar product and technology


Cypress = Cypress Semiconductor, Fairchild = Fairchild Semiconductor, Hitachi = Hitachi Semiconductor (America), Inc., IDT = Integrated Device Technology, Inc., ON = ON Semiconductor, Pericom = Pericom Semiconductor Corporation, Philips = Philips Semiconductors, Toshiba = Toshiba America Electronic Components, Inc.


LOGIC PURCHASING TOOL/ALTERNATE SOURCES

Table B-2. 3.3-V Logic

TI	FAIRCHILD	HITACHI	IDT	ON	PERICOM	PHILIPS	TOSHIBA
ALB							
ALVC	ALVC/VCX	ALVC	ALVC	VCX	ALVC	ALVC	VCX
CBTLV/CB3Q			CBTLV/QS3VH		P13B		
CB3T							
LV-A	LVQ/LVX	LV		LVX		LV	LVQ/LVX
LVC	LCX	LVC	LVC	LCX	LPT	LVC	LCX
LVT	LVT	LVT				LVT	

LEGEND:

 TI and this company have an alternate source agreement.

 Same product but no alternate source agreement




 Similar product and technology

Table B-3. 2.5-V Logic

TI	IDT	PERICOM	PHILIPS
ALVT		ALVT	ALVT
AVC		AVC	AVC
CB3Q	QS3VH		
CB3T			

LEGEND:

 TI and this company have an alternate source agreement.

 Same product but no alternate source agreement




 Similar product and technology


Table B-4. 1.8-V Logic

TI	HITACHI	IDT	PHILIPS
AUC		AUC	

LEGEND:

 TI and this company have an alternate source agreement.

 Same product but no alternate source agreement


 Similar product and technology


LOGIC PURCHASING TOOL/ALTERNATE SOURCES


Table B-5. Specialty Logic

TI	FAIRCHILD	HITACHI	IDT	PERICOM	PHILIPS
ABTE	ETL/VME				
FB	DS				FB
GTL					GTL
GTLP	GTLP		GTLP	GTLP	
HSTL					
JTAG	SCAN		QS3J		
TVC					GTL
PCA					PCA
SSTL		SSTL			
SSTV	SSTV	SSTV	SSTV	SSTV	SSTV
SSTVF			SSTVF	SSTVF	

LEGEND:

 TI and this company have an alternate source agreement.

 Same product but no alternate source agreement

 Similar product and technology