







### Warnings

-  Font Courier is used (1x on page 1)
-  Pattern or shading is used (4x on page 1)
-  RGB Gray or impure CMYK Gray is used (4x on page 1)
-  RGB Black or impure CMYK Black is used (4x on page 1)



### Processing

Certified PDF status	Preflighted successfully
Preflight Profile	SpringerCovers_v08_1502
Created by	Mark Rübsam
	Springer
Pages processed	1
Application used to preflight	Enfocus PitStop Server 13 update 2 powered by Enfocus PitStop Library 13 update 2
Application used to create the report	Enfocus PitStop Library 13 update 2
Preflighted on	UTC: July 4, 2016 - 04:43:52 [ July 4, 2016 - 10:13:52 ]

### Document properties

Document Name	978-94-024-0524-8_Cover_PrintPDF.pdf
Number of pages	1
PDF Version	1.3
Creation Date	UTC: July 1, 2016 - 15:52:40 [ July 1, 2016 - 21:22:40 ]
Modification Date	UTC: July 4, 2016 - 04:43:22 [ July 4, 2016 - 10:13:22 ]
Producer	Acrobat Distiller 11.0 (Windows)
Creator	Adobe InDesign CS6 (Windows)
Author	201439
Title	978-94-024-0524-8_Cover_PrintPDF.indd
Subject	-
Keywords	-
Trapped	no
Trapping Information Present	no
Repaired on Open	no
Optimized for Fast Web View	no
Thumbnails Present	no
Binding	left
Job Ticket Present	no

### Security

Encryption Type	not encrypted
Content Copying or Extraction	allowed
Content Access for Disabled Users	allowed
Adding or Modifying Annotations	allowed
Creating or Modifying Form Fields	allowed
Form Field Fill-in or Signing	allowed
Document Assembly	allowed
Other Document Modifications	allowed
Printing	high resolution

### Compression

Data format	binary
Document structure compressed	yes
Filters used	ZIP



### Status Incoming Document


Not Certified

### Action:

Started Certified PDF workflow

### Status Outgoing Document

Preflight Profile Name:	SpringerCovers_v08_1502
Author:	Mark Rübsam
Company:	Springer
Document Status	Preflighted successfully
Preflight Profile Status	Match

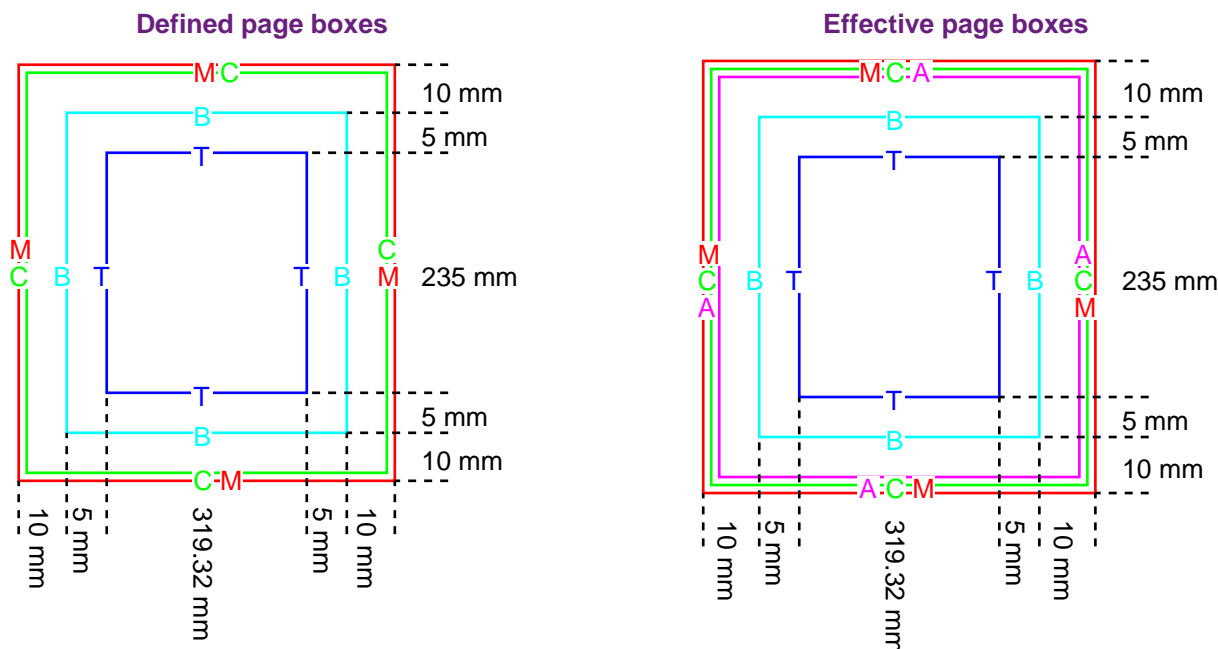

Page box	Defined size	Effective size
Media box (M)	349.32 x 265 mm	349.32 x 265 mm
Crop box (C)	349.32 x 265 mm	349.32 x 265 mm
Trim box (T)	319.32 x 235 mm	319.32 x 235 mm
Bleed box (B)	329.32 x 245 mm	329.32 x 245 mm
Art box (A)	not defined	349.32 x 265 mm

Defined for page 1

Media box starts at : (0, 0) mm

Page rotation : 0 degrees

Page scaling factor : 1



## Font Information

	PostScript font name	Type	Embedded as	Subset	Encoding
🔍	Courier	Type 1	Type 1	yes	Custom
🔍	Helvetica	Type 1	Type 1	yes	Custom
🔍	MinionPro-Regular	Type 1	Type 1	yes	Custom
🔍	MyriadPro-Cond	Type 1	Type 1	yes	Custom
🔍	MyriadPro-SemiboldCond	Type 1	Type 1	yes	Custom
🔍	MyriadPro-SemiboldSemiCn	Type 1	Type 1	yes	Custom
🔍	Springnew-Regular	Type 1	Type 1	yes	Custom



## Image Information

Type	Color Space	Size (pixels)	Resolution (ppi)	Bits per channel	Page	Angle (degrees)	Shear	Flipped	Custom Transfer	Custom Halftone	Custom BG	Custom UCR
Color	CMYK	1695x393	309.7x309.4	8	1	0	-	-	-	-	-	-
Color	Indexed	1027x570	309.6x309.6	8	1	0	-	-	-	-	-	-
Color	Indexed	1027x995	309.6x309.6	8	1	0	-	-	-	-	-	-
Color	Indexed	1272x393	309.6x309.5	8	1	0	-	-	-	-	-	-
Color	Indexed	144x171	309.1x309.5	8	1	0	-	-	-	-	-	-
Color	Indexed	285x393	309.3x309.5	8	1	0	-	-	-	-	-	-
Color	Indexed	54x466	307.7x309.5	8	1	0	-	-	-	-	-	-
Color	Indexed	880x1137	309.6x309.6	8	1	0	-	-	-	-	-	-
Color	Indexed	880x428	309.6x309.6	8	1	0	-	-	-	-	-	-



enfocus  
**PITSTOP**SERVER



**OPI Information**

**No OPI**



Item	Value
Color Space Page	CMYK 1
Color Space Page Base Space Range	Indexed 1 CMYK 7
Color Space Page Base Space Range	Indexed 1 CMYK 35
Color Space Page Base Space Range	Indexed 1 CMYK 116
Color Space Page Base Space Range	Indexed 1 CMYK 137
Color Space Page Base Space Range	Indexed 1 CMYK 20
Color Space Page Base Space Range	Indexed 1 CMYK 228
Color Space Page Name Alternate Space CMYK values	Separation (Process color) 1 ■ Black CMYK [0, 0, 0, 1]





# enfocus PITSTOPSERVER



## Output Intents

### GTS\_PDFX

Output condition	ISO Coated v2 300% (ECI)
Output condition identifier	Custom
Additional information	ISO Coated v2 300% (ECI)
Destination output profile	ISO Coated v2 300% (ECI)