

# Abstract Argumentation Frameworks to Promote Fairness and Rationality in Multi-experts Multi-criteria Decision Making

Stefano Bistarelli, Martine Ceberio, Joel A. Henderson  
and Francesco Santini

## 1 Introduction

Expert analysis and decisions arguably provide high-quality and highly-valued support for action and policy making in a wide variety of fields, from social services, to medicine, to engineering, to grant funding committees, and so on. However, the use of experts can be prohibitive due to either lack of availability, high cost, or limited time frame for action—this is the case particularly more so in impoverished areas. As such, it is desirable to be able to replicate/predict such decisions when beneficial even in the absence of experts. Unfortunately, there are many obstacles that still hinder an accurate simulation of expert decisions. First, it is hard to understand, and therefore replicate, the way each expert “aggregates” information/assessment along several criteria. In addition, even if we had a reasonable insight about it, any expert may make inconsistent decisions across similar scenarios. Finally, in the case of multiple experts, despite looking at the same information, two (or more) experts may disagree on the decisions to be made.

---

S. Bistarelli (✉)

Dipartimento di Matematica e Informatica, Università di Perugia,  
Via Vanvitelli, 06123 Perugia, Italy  
e-mail: bista@dmf.unipg.it

M. Ceberio · J.A. Henderson

Computer Science Department, The University of Texas at El Paso,  
500 West University, El Paso, TX 79968, USA  
e-mail: mceberio@utep.edu

J.A. Henderson

e-mail: jahenderson@miners.utep.edu

F. Santini

Istituto di Informatica e Telematica, CNR-Pisa, Via Moruzzi, 56124 Pisa, Italy  
e-mail: francesco.santini@iit.cnr.it

© Springer International Publishing AG 2018

M. Ceberio and V. Kreinovich (eds.), *Constraint Programming and Decision Making: Theory and Applications*, Studies in Systems, Decision and Control 100,  
DOI 10.1007/978-3-319-61753-4\_2

In spite of such challenges, traditional approaches seek to combine prior known decisions of experts into a classification of scenarios (machine learning approaches) or into some aggregation function that allows to best replicate the experts' decisions. Unfortunately, this line of approaches tends to overlook the irrationality and/or lack of fairness of experts, aggregating all available prior information regardless of quality.

In this work, we propose to model Multi-Experts Multi-Criteria Decision-Making (MEMCDM) problems using argumentation frameworks. We specifically design our proposed model so as to emulate fairness and rationality in decisions. For instance, when, of two expert's decisions, one is unfair, we impose an attack between these two decisions, forcing one of the two decisions out of the argumentation network's resulting extensions. Similarly, we specifically put irrational decisions in opposition to force one out. In doing so, we aim to enable the prediction of decisions that are themselves fair and rational. Our model is illustrated on two toy examples.

In what follows, we start by recalling preliminary notions, then we proceed with describing our model in details and illustrate our model in the case of Software Quality Assessment by multiple experts along multiple criteria.

## 2 Preliminary Notions

### 2.1 *Multi-criteria Decision Making (MCDM)*

Multi-criteria decision-making (MCDM) involves selecting one of several different alternatives, based on a set of criteria that describe the alternatives. However, there are numerous problems that make comparing these alternatives difficult. For instance, very often, decisions are based on several conflicting criteria; e.g., which car to buy that is cheap and energy efficient. In addition, what happens when we have a group of decision makers that must come to some sort of consensus? This is known as multi-expert multi-criteria decision making (MEMCDM). In MEMCDM, there are several new problems to be addressed. One such problem is how to handle expert disagreement and come to a consensus/decision in the first place. Another problem, as stated earlier, is that of predicting future decisions based on decision data from multiple experts along multiple criteria. Again, the question of "which expert/decision-making process to follow?" is a major challenge in solving such problems.

#### 2.1.1 Approaches to MCDM

In general, on a daily basis, when the decision is not critical, in order to reach a decision, we mentally "average/sort" these criteria along with their satisfaction levels. This corresponds to aggregating values of satisfaction with weights on each criterion, reflecting its importance in the overall score (a.k.a. additive aggregation),

that is, calculating the overall score of an alternative with the weighted sum of the criterion scores. In other words, weights assigned to different sets of criteria in the weighted-average approach form an “additive measure”. Additive aggregation, however, assumes that criteria are independent, which is seldom the case [5]. Non-linear approaches also prove to lead to solutions that are not completely relevant [9].

This should change when considering possible dependence between criteria. For example, if two criteria are strongly dependent, it means that both criteria express, in effect, the same attribute. As a result, when we consider the set consisting of these two criteria, we should assign to this set the same weight as to each of these criteria—and not double the weight as in the weighted sum approach. In general, the weight associated to different sets should be different from the sum of the weights associated to individual criteria. In mathematics, such non-additive functions assigning numbers to sets are known as non-additive (fuzzy) measures. It is therefore reasonable to describe the dependence between different criteria by using an appropriate non-additive (fuzzy) measure. Combining the fuzzy measure values with the criteria satisfaction can be done using the Choquet integral, which integrals are actively used in Multi-Criteria Decision Making [8].

However, to make this happen, fuzzy measures need to be determined: they can either be identified by a decision maker/expert or by an automated system that extracts them from sample data. Since human expertise might not always be available and getting accurate fuzzy values (even from an expert) might be tedious [14], fuzzy measures are usually automatically extracted from prior decision data. To the original problem, this approach adds an optimization problem that can be tedious to solve. Although it was solved with success for some data sets [13], the overall prediction quality is not satisfactory and the approach limits the number of criteria that can be taken into account (the number of variables to determine is exponential in the number of criteria) [12].

## 2.2 *Argumentation Frameworks*

In this section we briefly summarise the background information related to classical AAFs [7]. We focus on the basic definition of an AAF (see Definition 1), on the notion of defence (Definition 2), and on extension-based semantics (Definition 3).

**Definition 1** (*Abstract Argumentation Frameworks*) An Abstract Argumentation Framework (AAF) is a pair  $F = \langle A, R \rangle$  of a set  $A$  of arguments and a binary relation  $R \subseteq A \times A$ , called the attack relation.  $\forall a, b \in A$ ,  $aRb$  (or,  $a \rhd b$ ) means that  $a$  attacks  $b$ . An AAF may be represented by a directed graph (an interaction graph) whose nodes are arguments and edges represent the attack relation. A set of arguments  $S \subseteq A$  attacks an argument  $a$ , i.e.,  $S \rhd a$ , if  $a$  is attacked by an argument of  $S$ , i.e.,  $\exists b \in S. b \rhd a$ .

**Definition 2** (*Defence*) Given an AAF,  $F = \langle A, R \rangle$ , an argument  $a \in A$  is defended (in  $F$ ) by a set  $S \subseteq A$  if for each  $b \in A$ , such that  $b \rightarrow a$ , also  $S \rightarrow b$  holds. Moreover, for  $S \subseteq A$ , we denote by  $S_R^+$  the set  $S \cup \{b \mid S \rightarrow b\}$ .

The “acceptability” of an argument [7] depends on its membership to some sets, called *extensions*: such extensions need to satisfy the properties required by a given semantics, and they characterise a collective “acceptability”. In the following, *stb*, *adm*, *prf*, *gde*, *com*, and *sem*, respectively stand for stable, admissible, preferred, grounded, complete, and semi-stable semantics. The intuition behind these semantics is outside the scope of this work (e.g., see [10, Chap.3]).

**Definition 3** (*Semantics*) Let  $F = \langle A, R \rangle$  be an AAF. A set  $S \subseteq A$  is conflict-free (in  $F$ ), denoted  $S \in cf.(F)$ , iff there are no  $a, b \in S$ , such that  $(a, b), (b, a) \in R$ . For  $S \in cf.(F)$ , it holds that:

- $S \in stb(F)$ , if for each  $a \in A \setminus S$ ,  $S \rightarrow a$ , i.e.,  $S_R^+ = A$ ;
- $S \in adm(F)$ , if each  $a \in S$  is defended by  $S$ ;
- $S \in prf(F)$ , if  $S \in adm(F)$  and there is no  $T \in adm(F)$  with  $S \subset T$ ;
- $S \in gde(F)$  if  $S \in com(F)$  and there is no  $T \in com(F)$  with  $T \subset S$ ;
- $S \in com(F)$ , if  $S \in adm(F)$  and for each  $a \in A$  defended by  $S$ ,  $a \in S$  holds;
- $S \in sem(F)$ , if  $S \in adm(F)$  and there is no  $T \in adm(F)$  with  $S_R^+ \subset T_R^+$ .

We recall that for each AF,  $stb(F) \subseteq sem(F) \subseteq prf(F) \subseteq com(F) \subseteq adm(F)$  holds, and that for each of the considered semantics  $\sigma$  (except stable)  $\sigma(F) \neq \emptyset$  always holds. Moreover, in case an AF has at least one stable extension, its stable, and semi-stable extensions coincide. Finally,  $gde(F)$  is always unique, and  $gde(F) \in com(F)$ .

Consider  $F = \langle A, R \rangle$  in Fig. 1, with  $A = \{a, b, c, d, e\}$  and  $R = \{(a, b), (c, b), (c, d), (d, c), (d, e), (e, e)\}$ . We have that  $stb(F) = sem(F) = \{\{a, d\}\}$ , and  $gde(F) = \{a\}$ . The admissible sets of  $F$  are  $\emptyset, \{a\}, \{c\}, \{d\}, \{a, c\}, \{a, d\}$ , and  $prf(F) = \{\{a, c\}, \{a, d\}\}$ . The complete extensions are  $\{a\}, \{a, c\}, \{a, d\}$ .

In the proposed model (precisely in Sect.3.2) we take advantage of *symmetric* AAFs [6]:

**Definition 4** (*Symmetric AAFs* [6]) A symmetric (Abstract) Argumentation Framework is a finite Argumentation Framework  $F = \langle A, R \rangle$  where  $R$  is assumed symmetric, non empty and irreflexive.

## 2.2.1 Decision-making with Arguments

In this section we simplify part of the content in [10, Chap.15]. Solving a decision problem amounts to defining a pre-ordering, usually a complete one, on a set  $D =$

**Fig. 1** An example of AAF



$\{d_1, \dots, d_n\}$  of  $n$  candidate options. Argumentation can be a means for ordering this set  $D$ , that is to define a preference relation  $\succsim$  on  $D$ . An argumentation-based decision process can be decomposed into the following steps:

1. Constructing arguments in favour/against statements (beliefs or decisions).
2. Evaluating the strength of each argument.
3. Determining the different conflicts among arguments.
4. Evaluating the acceptability of arguments.
5. Comparing decisions on the basis of relevant accepted arguments.

We need to characterise the subsets of practical arguments that are respectively in favour ( $\mathcal{F}_f$ ), or against ( $\mathcal{F}_c$ ) a given option in  $d_i \in D$ :

- $\mathcal{F}_f : D \rightarrow 2^A$  is a function that returns the arguments in favour of a candidate decision. Such arguments are said pros the option.
- $\mathcal{F}_c : D \rightarrow 2^A$  is a function that returns the arguments against a candidate decision. Such arguments are said cons the option.

In Definition 5 we present one of the possible ways to prefer ( $\succsim$ ) one decision instead of another. This *unipolar* principle only refers to either the arguments pros or cons.

**Definition 5** (*Counting arguments pros/cons*) Let  $DS = (D, F)$  be a decision system, where  $F$  is an AAF, and  $Acc_{stb}(F)$  collects the sceptically accepted arguments of a framework  $F$  under the stable semantics. Let  $d_1, d_2 \in D$ .

$$d_1 \succsim d_2 \iff |\mathcal{F}_f(d_1) \cap Acc_{stb}(F)| \geq |\mathcal{F}_f(d_2) \cap Acc_{stb}(F)|$$

The aim of (part of) future work (see also Sect. 5) is to apply similar techniques to derive the best decision about our model, e.g., an evaluation about the software.

### 3 Proposed Model for MEMCDM Using Argumentation Frameworks

Here, we describe our model: given an MEMCDM problem with  $n$  criteria and  $p$  experts, how do we “translate”/model it as an AAF? In other words, which arguments and attacks should compose it? Note that, through this section we will use letters  $S$  and  $R$  to identify “Software”, “Ranking” (unlikely to Sect. 2.2, where these letters represent a subset of arguments and the attack relation respectively).

### 3.1 Arguments

#### 3.1.1 What Does the Data We Use (i.e., Experts' Evaluation of Software in This Case) Tell Us About the Arguments to Add to the Network?

We differentiate arguments that come from the data (i.e., Expert  $i$  said that Software  $j$  is good) from arguments that are implicit (i.e., Software  $k$  is Poor).

1. **Expert  $i$  gives Item  $j$  a total quality  $D_{ij}$**  (which, in the case of Software Quality Assessment – SQA, can be Bad, Poor, Fair, Good, or Excellent):

$$\mathbf{Argument}(E_i, S_j, D_{ij})$$

Let us call such arguments, arguments of type ESD.

2. **Expert  $i$  judges that Item  $j$  satisfies criterion  $m$  up to quality  $D_{ijm}$**

$$\mathbf{Argument}(E_i, S_j, c_m, D_{ijm})$$

Let us call such arguments, arguments of type EScD.

#### 3.1.2 Which Implicit Arguments Should Be Part of the Argumentation Network for This Specific Type of Problem?

For each item, independently from what experts say, there will be a decision made. This decision will be in the form of a final ranking, ranging over all possibly ranking values (in the case of SQA: Bad, Poor, Fair, Good, Excellent). So regardless of ESD arguments, we add to the argumentation network the following arguments:

$$\forall \text{item } S_i, \forall \text{ ranking } D_j : \mathbf{Argument}(S_i, D_j)$$

Let us call such arguments, **arguments of type SD**.

#### 3.1.3 Coalitions of Arguments

Here we aim to model the fact the  $n$  decisions of any expert on the  $n$  criteria of the problem at hand belong together: they together form the “support” for the expert’s final decision on the given item. As a result, for any expert  $E_i$  and any item  $S_j$ , we define a coalition of “supporting” decisions as:

$$\forall E_i, \forall S_j, \mathbf{Coalition}: \{(E_i, S_j, c_k, D_{i,j,k}), k \in \{1, \dots, n\}\}$$

Let us call such coalitions of EScDs, extended arguments of type **CoEScD**. The result of modeling such coalitions is that all arguments in the coalition will be forced to be altogether either in or out of extensions. *Per se, we are enforcing an equality constraint on the belonging of these arguments to any extension.*

In the following, in particular in Sects. 3.2.3 and 3.2.4, we will use “ $a$  supports  $b$ ” as a shortcut to represent a set of attacks from  $a$  to all the arguments similar, but at the same time in contrast with  $b$ .

## 3.2 Attacks

In this subsection, we answer the following question: What are the **attacks** (*edges of the network*) between these arguments (*nodes*)? *Note:* All attacks we define are reciprocal, hence the edges are always set bidirectionally.

For attacks too, we differentiate between attacks that come from inconsistencies in the decision data (disagreement between experts, inconsistency in decisions of a single expert, lack of fairness, irrationality). An assumption that we make in designing the network model is that experts should be rational: in this, we mean that even if they are not (which we know), they should be and we aim to elicit decisions that are as rational as can be.

### 3.2.1 Attacks Derived from Lack of Fairness

Here, we assume that if an expert is fair, then s/he should derive the same final ranking from the same criteria rankings. For instance, if there are 3 criteria ( $c_1$ ,  $c_2$ , and  $c_3$ ) to assess items and an expert  $E$  has the following decision history:

$$\begin{cases} E, S_i, c_1, D_1 \\ E, S_i, c_2, D_2 \\ E, S_i, c_3, D_3 \end{cases} \longrightarrow E, S_i, D$$

and: (with  $S_i \neq S_j$ )

$$\begin{cases} E, S_j, c_1, D_1 \\ E, S_j, c_2, D_2 \\ E, S_j, c_3, D_3 \end{cases} \longrightarrow E, S_j, D'$$

where  $D \neq D'$ , then we should see arguments  $(E, S_i, D)$  and  $(E, S_j, D')$  are a lack of fairness in judgment and therefore add the following attack in the argumentation network:  $(E, S_i, D) \longleftrightarrow (E, S_j, D')$ .

More generally, assuming that the criteria that are considered by the experts are  $c_k$ , with  $k \in K$ , and that the possible rankings are denoted by  $D_r$ , with  $r \in R$ , then we add the following rule to our model:

$$\begin{aligned} &\forall E, S_i, S_j, \text{ s.t. } i \neq j \text{ and } \forall k \in K, (E, S_i, c_k, D_k) \text{ and } (E, S_j, c_k, D_k) : \\ &\quad \text{if } (E, S_i, D_i) \text{ and } (E, S_j, D_j) \text{ and } D_i \neq D_j \\ &\quad \text{then } \mathbf{Attack}(E, S_i, D_i) \longleftrightarrow (E, S_j, D_j) \end{aligned}$$

### 3.2.2 Attacks Derived from Lack of Rationality

Let us recall that we assume that the rankings  $D_r$ , with  $r \in R$ , are totally ordered. However, with  $n$  criteria, the set of  $n$ -tuples of rankings is only partially ordered:

$$\begin{aligned} &(D_1, D_2, \dots, D_n) < (D'_1, D'_2, \dots, D'_n) \\ &\text{iff :} \\ &\forall i \in \{1, \dots, n\} : (D_i \neq D'_i) \longrightarrow D_i < D'_i \end{aligned}$$

Now:  $\forall E_i$  and  $\forall S_j$ , we denote by  $(D_{1,i,j}, \dots, D_{n,i,j})$  the set of  $n$  decisions made by Expert  $E_i$  on each of the criteria  $c_1, \dots, c_n$  for Item  $S_j$ , and by  $D_{i,j}$  the final decision of Expert  $E_i$  on Item  $S_j$ .

Being rational for any given expert  $E_i$  means that if for Item  $S_j$ , s/he ranks criteria lower (w.r.t. above partial order) than s/he ranks the criteria of Item  $S_k$ , then his/her final ranking of  $S_j$  should not be higher than his/her ranking of  $S_k$ . Formally, it is expressed as follows:

$$\begin{aligned} &\forall E_i, \forall S_j, \forall S_k (j \neq k) : \\ &\quad \text{if: } (D_{1,i,j}, \dots, D_{n,i,j}) < (D_{1,i,k}, \dots, D_{n,i,k}) \text{ and: } D_{i,j} > D_{i,k} \\ &\quad \text{then: } \mathbf{Attack}(S_j, E_i, D_{i,j}) \longleftrightarrow (S_k, E_i, D_{i,k}) \end{aligned}$$

### 3.2.3 Attack Related to Implicit Arguments: SD and cD

In this subsection, we describe the following attacks:

- attacks between implicit arguments SD, and
  - attacks across SD and ESD.
1. *Attacks among SDs*: SD Arguments associate an item with a ranking. For each item  $S_i$ , there are  $p$  SD arguments if there are  $p$  possible ranking levels. Each of these  $p$  arguments attack each other (they form a complete subgraph). In other words:

$$\forall S_i, \forall r_1, r_2 \in R, \text{ with } r_1 \neq r_2, \mathbf{Attack}: (S_i, D_{r_1}) \longleftrightarrow (S_i, D_{r_2})$$



2. *Supports between SDs and ESDs*: For any given item  $S_j$ , an argument saying that  $S_i$  is evaluated  $D_h$  is in contradiction (and therefore attacks—and vice-versa) with any argument  $(E_i, S_j, D_k)$  as soon as  $D_h \neq D_k$ . As a result we have:

$$\forall E_i, \forall S_j, \forall D_k. (E_i, S_j, D_k) \text{ **Supports** } (S_j, D_k)$$

In terms of the attack relation, this support can be rephrased as:

$$\forall E_i, \forall S_j, (D_h \neq D_k) \rightarrow \text{Attack: } (S_j, D_h) \longleftrightarrow (E_i, S_j, D_k)$$

### 3.2.4 Supports Between Coalitions and ESDs

Here we aim to model the fact that coalitions of decisions on criteria support experts' decisions. In other words:

$$\forall E_i, \forall S_j, \{(E_i, S_j, c_k, D_{i,j,k}), k \in \{1, \dots, n\}\} \text{ **Supports** } (E_i, S_j, D_{i,j})$$

In terms of attacks, this is expressed<sup>1</sup> as follows:

$$\begin{aligned} &\forall E_i, E_j \forall S_k : D_{i,k} \neq D_{j,k} \rightarrow \\ &\text{Attack: } \{(E_i, S_k, c_l, D_{i,k,l}), k \in \{1, \dots, n\}\} \longleftrightarrow (E_j, S_k, D_{j,k}) \end{aligned}$$

## 4 A Simple Example

Here, let us look at a scenario in which experts independently assess given pieces of software, based on several given evaluation criteria. We describe the resulting argumentation networks (arguments/nodes and attack/edges). Table 1 summarises our example, by reporting all the Poor/Fair/Good quality-evaluation about two different criteria (1 and 2) and the overall quality related to three different software products (S1/S2/S3). Such scores are produced by three different experts (E1/E2/E3). For instance, E1 estimates that the overall quality of S1 is fair, with Criterion 1 evaluated as poor, and Criterion 2 as good.


The graph in Fig. 2 represents the AAF given by following the model proposed in Sect. 3 on the data in Table 1. The yellow nodes represent explicit arguments from the data. The green nodes are the implicit arguments. The blue nodes are the coalitions. The black bold lines represent attacks due to lack of fairness and lack of rationality. The dotted line attacks are those based on implicit arguments. Finally, the grey bold lines are coalition supports of expert decisions.

---

<sup>1</sup>Refer to Sect. 3.1.3 for the definition of support.

**Table 1** The explicit arguments that can be collected on our toy-example

Software	Expert	Criterion 1	Criterion 2	Total quality
S1	E1	Poor	Good	Fair
S1	E2	Good	Poor	Fair
S1	E3	Fair	Fair	Fair
S2	E1	Poor	Good	Poor
S2	E2	Poor	Good	Good
S2	E3	Poor	Good	Fair
S3	E1	Good	Good	Good
S3	E2	Good	Good	Fair
S3	E3	Fair	Fair	Fair

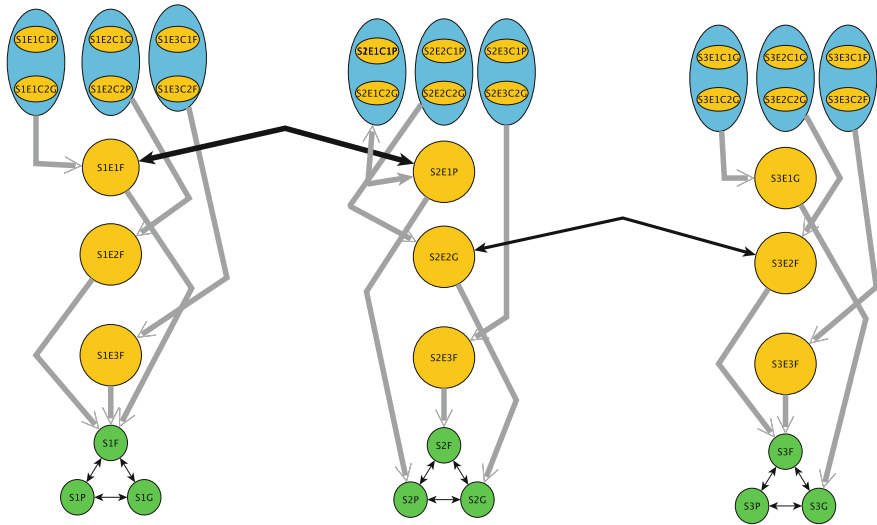**Fig. 2** The AAF given by the model proposed in Sect. 3 on the data in Table 1


## 4.1 Towards Decision Making

In order to provide a solution to the example in Fig. 2, we adopted a tool developed by some of the authors of this work, i.e., *ConArg* (*Argumentation with Constraints*).

*ConArg*<sup>2</sup> [2, 3] is a reasoner based on the *Java Constraint Programming* solver<sup>3</sup> (JaCoP), a Java library that provides a *Finite Domain Constraint Programming* paradigm [11]. The tool comes with a graphical interface, which visually shows all the obtained extensions for each problem. *ConArg* is able to solve also the weighted and

<sup>2</sup><http://www.dmi.unipg.it/conarg/>.

<sup>3</sup><http://www.jacop.eu>.

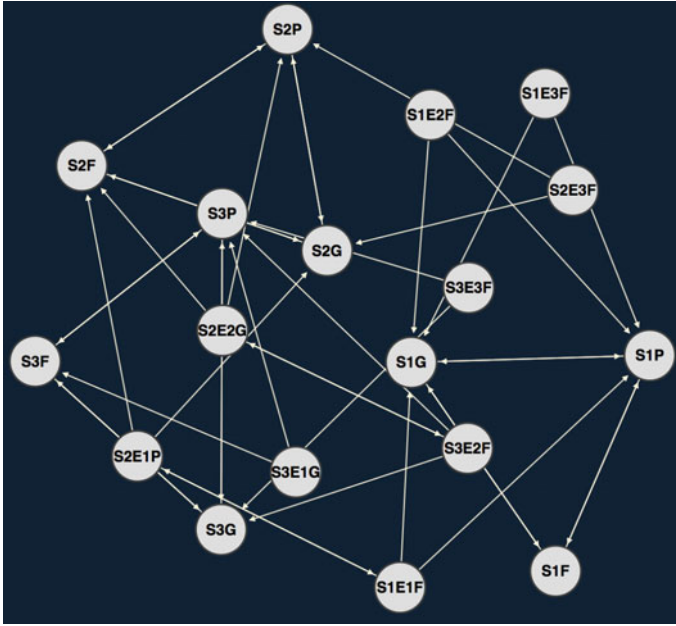

**Fig. 3** The AAF of the model in Sect. 3 visualised in the Web interface of ConArg. Arguments containing criteria have been removed from the picture in order to simplify it

coalition-based problems presented in [1, 4]. Moreover, it can import/export AAFs with the same text format of ASPARTIX. Recently, we have extended the tool to its second version, i.e., ConArg2 (freely downloadable from the same Web-page of ConArg), in order to improve its performance: we implemented all the models in Gecode,<sup>4</sup> which is an open, free, and efficient C++ environment where to develop constraint-based applications. We have also dropped the graphical interface, having a textual output only. In addition, a Web interface is available at the project homepage, through which it is possible to test the tool without downloading it. So far, ConArg2 finds all conflict-free, admissible, complete, stable, grounded, preferred, semi-stable and ideal extensions (see Definition 3).

In Fig. 3 we visualise the example in Table 1 (and Fig. 2). ConArg returns four stable extensions:

```
{S1E1F S1E2F S1E3F S1F S2E3F S2F S3E1G S3E2F S3E3F}
 {S1E1F S1E2F S1E3F S1F S2E2G S2E3F S3E1G S3E3F}
 {S1E2F S1E3F S1F S2E1P S2E3F S3E1G S3E2F S3E3F}
 {S1E2F S1E3F S1F S2E1P S2E2G S2E3F S3E1G S3E3F}
```

Therefore, we can see that S1F is sceptically accepted (it is present in all the stable extensions), while S2F is credulously accepted (it belongs to the first extension only).

<sup>4</sup><http://www.gecode.org>.

In addition, no information is obtained for S3, in none of the stable extensions. For this reason, we can safely evaluate S1 as Fair, and, with a lesser degree of certainty, S2 as Fair. With such few experts however, we cannot have a final evaluation for S3.

## 5 Conclusion and Future Work

In this work, we proposed a model for MEMCDM problems, based on classical AAFs [7], that allows to emulate fairness and rationality. This allows discrimination among input decision data (from experts' prior decisions) between data of value and data that should just not be taken into account. Next steps include operationalising the whole process (from input processing to results filtering) and then adding weights to the attacks to simulate the extent of disagreements and allow lineance towards small errors (e.g., unfairness / irrationality that are really minimal, minor disagreements). Furthermore, we will take inspiration from classical decision-making techniques [10, Ch. 15] with the purpose to rank decisions and decide, for instance, if a software is good or poor. We will even develop new techniques exploring weights on attacks. Also part of future work, we plan to explicitly acknowledge in the AAF that disagreement can be at two different levels: epistemic and pragmatic, and to make use of argumentation frameworks to identify disagreement configurations (epistemic and pragmatic, epistemic only, pragmatic only).

**Acknowledgements** S. Bistarelli was partially supported by MIUR-PRIN “Metodi logici per il trattamento dell’informazione”. M. Ceberio’s work was partially supported by the National Science Foundation, NSF CCF grant 0953339 and the American Association for the Advancement of Science, AAAS MIRC (agreement date 112612). F. Santini was partially supported by MIUR PRIN “Security Horizons”.

## References

1. Bistarelli, S., Santini, F.: A common computational framework for semiring-based argumentation systems. In: ECAI 2010—19th European Conference on Artificial Intelligence, vol. **215**. Frontiers in Artificial Intelligence and Applications, pp. 131–136. IOS Press, (2010)
2. Bistarelli, S., Santini, F.: Conarg: A constraint-based computational framework for argumentation systems. IEEE Computer Society. In: Proceedings of the 2011 IEEE 23rd International Conference on Tools with Artificial Intelligence, ICTAI '11, Washington, DC, USA . pp. 605–612 (2011)
3. Bistarelli, S., Santini, F.: Modeling and solving afs with a constraint-based tool: Conarg. In: Theory and Applications of Formal Argumentation (TAFA). Lecture Notes in Computer Science, vol. **7132**, pp. 99–116. Springer, Heidelberg (2012)
4. Bistarelli, S., Santini, F.: Coalitions of arguments: An approach with constraint programming. *Fundam. Inform.* **124**(4), 383–401 (2013)
5. Ceberio, M., Modave., F.: An interval-valued, 2-additive Choquet integral for multi-criteria decision making. In: Proceedings of the 10th Conference on Information Processing and Management of Uncertainty in Knowledge-Based Systems (IPMU'04)

6. Coste-Marquis, S., Devred, C., Marquis, P.: Symmetric argumentation frameworks. In: Lluís Godo, (ed.) ECSQARU. Lecture Notes in Computer science, vol. **3571**, pp. 317–328. Springer, (2005)
7. Dung, P.M.: On the acceptability of arguments and its fundamental role in nonmonotonic reasoning, logic programming and n-person games. *Artif. Intell.* **77**(2), 321–357 (1995)
8. Grabisch, M., Labreuche, C.: A decade of application of the choquet and sugeno integrals in multi-criteria decision aid. *4OR*, **6**(1):1–44 (2008)
9. Modave, F., Ceberio, M., Kreinovich, V.: Choquet integrals and OWA criteria as a natural (and optimal) next step after linear aggregation: A new general justification. In: Proceedings of MICAI'2008, pp. 741–753 (2008)
10. Rahwan, I., Simari, G.R.: *Argumentation in Artificial Intelligence*, 1st edn. Springer Publishing Company, Incorporated, New York (2009)
11. Rossi, F., van Beek, P., Walsh, T.: *Handbook of Constraint Programming* (Foundations of Artificial Intelligence). Elsevier Science Inc., New York, NY, USA (2006)
12. Wang, X., Ceberio, M., Virani, S., Garcia, A., Cummins, J.: A hybrid algorithm to extract fuzzy measures for software quality assessment. *J. Uncertain Syst.* **7**(3), 219–237 (2013)
13. Wang, X., Cummins, J., Ceberio, M.: The Bees algorithm to extract fuzzy measures for sample data. In: Proceedings of Annual Conference of North American Fuzzy Information Processing Society (NAFIPS'2011), El Paso, TX, March 2011
14. Wang, X., Garcia Contreras, A.F., Ceberio, M., Del Hoyo, C., Gutierrez, L.C., Virani, S.: Interval-based algorithms to extract fuzzy measures for software quality assessment. In: Proceedings of Annual Conference of North American Fuzzy Information Processing Society (NAFIPS'2012)

Constraint Programming and Decision Making: Theory  
and Applications

Cebero, M.; Kreinovich, V. (Eds.)

2018, XII, 128 p. 7 illus., 1 illus. in color., Hardcover

ISBN: 978-3-319-61752-7